



UHF FM REPEATER

IC-FR4000



- **50 Watt continuous full duty cycle operation**

This repeater looks as good as it performs. A rugged heatsink, large cooling fans and a high performance power module provide the repeater with a stable 50W at full duty cycle operation.

- **Automatic battery backup system**

A built-in backup system supports automatic switching to an external power supply (13.6V DC) if the AC power supply fails.

- **Multiple CTCSS & DTCS tone memories with multiple memory channels**

Up to 16 CTCSS/DTCS tones (TX/RX tones respectively) can be programmed in a channel. This feature allows you to share a channel with multiple user groups. You can also give priority/exclusive use to a specified group simply by programming different tones to another memory channel. Ideal for many different applications.

- **Built-in 2-Tone, 5-Tone, DTMF encoder & decoder**

Multiple signaling systems are equipped as standard. These systems are fully compatible with Icom F-series radios.

- **Internal space for duplexer and isolator**

The repeater has an internal space to install a duplexer and isolator*. The controls of the duplexer are accessible from the front of the repeater without disassembly. Faster and easier maintenance and adjustment is possible.

* Ask your dealer for details about available duplexers and isolators.

- **Telephone interconnect capability**

- **DTMF remote control capability**

You can control the repeater from a remote location over the air or over a phone line with DTMF.

- **Optional wall mount bracket, MB-77 and 19 inch rack mount bracket, MB-78**



19-inch rack mount, MB-78



Installation on a wall with the MB-77


Icom Inc.

ADDITIONAL FEATURES

- Master/Slave backup operation by connecting two repeaters
- Self check function checks for internal errors and alerts with a beep sound or with a phone call
- Accessory connector (D-sub 25-pin) on the rear panel for trunking controller including LTR, PassPort, SmarTrunkII and MPT1327
- Compatible with VEGA tone remote control system
- 5-Tone relay function
- Optional Voice Scrambler UT-109 or UT-110
- CW ID transmitter (DTMF or 5-Tone also selectable)
- Password and kill/stun function for security
- 16-digit alphanumeric display convenient for base station operation
- A programmable button gives access to a customized function

All trademarks are the properties of their respective holders.

REAR VIEW

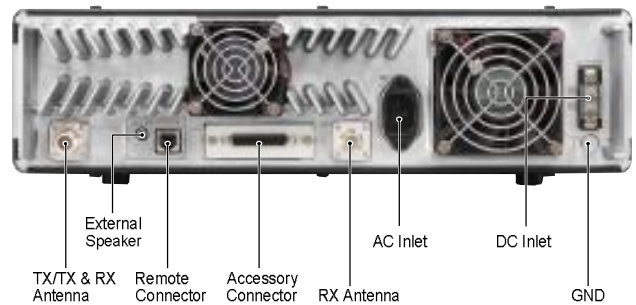

SPECIFICATIONS

GENERAL

- Frequency coverage : 400–430MHz, 430–450MHz, 450–480MHz, 480–512MHz
- Number of channels : 32 channels
- Channel spacing : 12.5/25kHz
- PLL channel step : 5, 6.25kHz
- Frequency stability : ±2.5ppm
- Operating temperature range : -30°C to +60°C; -22°F to +140°F
- Power supply voltage : 100–120V AC (50/60Hz), 220–240V AC (50/60Hz), 13.6V DC
- Current drain (at 13.6V DC) : TX at 50W 20A typ., RX Max. audio 2A typ., Stand-by 1A typ.
- Antenna impedance : 50Ω (Type-N × 2)
- Dimensions (W×H×D) : 410×110×360 mm ; 16⁵/₈×4¹/₈×14³/₁₆ in
- Weight : 12kg ; 26.4lb

TRANSMITTER

- Output power : 50W (high), 10W (low) selectable (at 13.6V DC)
- Max. frequency deviation : ±5.0kHz (wide) ±2.5kHz (narrow)
- Spurious emissions : 70dB
- Adjacent channel power : 70dB (wide) 60dB (narrow)
- Hum and noise : 40dB (wide) 34dB (narrow)
- Microphone impedance : 600Ω (8-pin modular)


RECEIVER

- Sensitivity : 0.25μV typ. (at 12dB SINAD)
- Adjacent channel selectivity : 70dB (wide) 60dB (narrow)
- Spurious response : 70dB
- Intermodulation rejection ratio : 70dB
- Hum and noise ratio : 40dB (wide) 34dB (narrow)
- Audio output power : 2.5W typ. at 10% distortion with a 4Ω load
- External speaker connector : 2-conductor 3.5 (d) mm (1/8")/4Ω

Measurements made in accordance with EIA/TIA-603-A. Compatibility of functions for use with a telephone line may not work in some countries. All stated specifications are subject to change without notice or obligation.

OPTIONS

- **MB-77 WALL MOUNT BRACKET**
For mounting the repeater on a wall. Hinges provide easy maintenance while mounted.
- **MB-78 19" RACK MOUNT BRACKET**
The 19 inch rack mount bracket is 3U height (133.5mm; 5¹/₄ in).
- **HM-100N HAND MICROPHONE**
- **HM-100TN DTMF MICROPHONE**
- **SM-25 DESKTOP MICROPHONE**
Convenient for dispatching. Equipped with a monitor switch.
- **UT-109 VOICE SCRAMBLER UNIT (Version 01)**
Provides operating security. Up to 32 non-rolling scrambling codes are available.
- **UT-110 VOICE SCRAMBLER UNIT (Version 01)**
Up to 1020 (255 codes × 4 groups) rolling scrambling codes are available. Ask your dealer for details.



Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 118th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL: <http://www.icomamerica.com>
<Customer Service> Phone: (425) 454-7619

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: (604) 952-4266 Fax: (604) 952-0090
URL: <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL: <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: 09 274 4062 Fax: 09 274 4708
URL: <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL: <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14, 750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 599 04 46
URL: <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Heme Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL: <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, 1, Rue Brindejonc des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone: (33) 5 61 36 03 03 Fax: (33) 5 61 36 03 00
URL: <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874
URL: <http://www.asia-icom.com>

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road,
Beijing, China
Phone: (010) 6866 6337 Fax: (010) 6866 3553
URL: <http://www.bjicom.com>



Certificate Number O14190
Icom Inc. (Japan), is an ISO9001 certification acquired company.

Your local distributor/dealer:

WWW.VIVA-TELECOM.RU

03E30020 © 2003 Icom Inc. Printed in Japan