RFS

N Male Connector for 1/2" Coaxial Cable, OMNI FIT™ Premium, Straight, Polymer claw and compression sealing

OMNI FIT[™] high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connectorcable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications. The 7-16 connector is the most rugged RF connection meeting all requirements even under the most severe environmental conditions. Sealing against outer conductor and jacket by means of the polymer claw and 360 compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.

FEATURES / BENEFITS

Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction



OMNI FIT™ Premium Connectors


Technical Features

Transmission Line Type		Coaxial Cable	
Cable Size		1/2"	
Cable Type		Foam Dielectric	
Model Series		LCF12-50 Series	
Connector Interface		Ν	
Connector Type		OMNI FIT™ PREMIUM Straight	
Sealing Method		Polymer claw + 360° Compression	
Gender		Male	
ELECTRICAL SPECIFICATIONS			
Nominal Impedance	Ohm	50	
3rd Order IM Product @ 2x20 Watts	dBc	-156 ; typical -162	
Maximum Frequency	GHz	6.0	
VSWR, Return Loss	VSWR (dB)	0 < f ≤ 1.0 GHz: 1.020 (40.0) 1.0 < f ≤ 2.7 GHz: 1.030 (36.6) 2.7 < f ≤ 3.7 GHz: 1.060 (30.7)	
MECHANICAL SPECIFICATIONS			
Plating Outer/Inner		NiTin/Silver	
Length	mm (in)	64.05 (2.52)	
Outer Diameter	mm (in)	29 (1.14)	
Weight	kg (lb)	0.11 (0.24)	
Inner Contact Attachment		Basket	
Outer Contact Attachment		360° clamping	
ACCESSORIES			
Wrench size front	mm (in)	18	
Wrench size rear	mm (in)	26	
Trimming Tool		TRIM-SET-L12-D01 TRIM-LCF12-D01-A	
TESTING AND ENVIRONMENTAL			
Waterproof Level		IP68	

All information contained in the present datasheet is subject to confirmation at time of ordering



N Male Connector for 1/2" Coaxial Cable, OMNI FIT™ Premium, Straight, Polymer claw and compression sealing

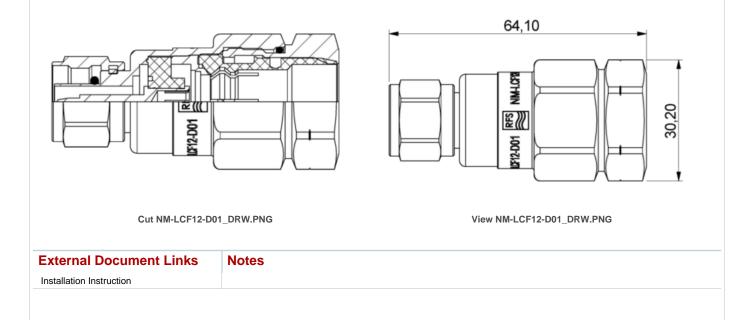

NM-LCF12-D01

REV DATE: 29.Feb.2016

www.rfsworld.com