

sanwa

sanwa

sanwa

GENERAL CATALOG 2018

<http://www.sanwa-meter.co.jp>

Electric Test Tools
GENERAL CATALOG
2018

sanwa
SANWA ELECTRIC INSTRUMENT CO., LTD.
Dempa Bldg., 4-4 Sotokanda 2-Chome, Chiyoda-ku, Tokyo, 101-0021 Japan
Tel: +81-3-3251-0941 Fax: +81-3-3256-9740

Distributed by

SANWA ELECTRIC INSTRUMENT CO., LTD.

●The specifications and design listed on this catalog are subject to change without notice.
●Printed photos may appear a little different from the actual color of products.
●Read the operation manual thoroughly and use equipment properly.
●The size of photos of products are not same as of actual product size.



Top class quality popular in 74 countries around the world.

Measurements become valid only when people place confidence in the quality of measuring instruments. Sanwa has supported the work of professionals for over half a century, and has produced a myriad of different solutions through the utilization of high levels of quality.

This quality control includes not only “products”, but also each and every operation, maintenance services, and sales and marketing activities, and is thoroughly implemented utilizing reliable systems and the intangible awareness of each of our employees. **sanwa** is a Japanese name brand that lives up to the trust of engineers around the world through the provision of high quality measuring instruments.



Clamp Meter

Clamp Meter.....P05
Clamp Meter comparative chart.....P54~P55
CAM600S.....P06
DCL1000.....P06
DCL11R.....P07
DCL1200R.....P08
DCL3000R.....P08
DCL31DR.....P09
DCM60R.....P08
DCM400.....P06
DCM400AD.....P07
DCM600DR.....P09
DCM660R.....P08
DCM2000DR.....P09
DCM-22AD.....P07
DLC460F.....P09

Clamp Sensor.....P10
CL-22AD.....P11
CL3000.....P11
CL33DC.....P11



Insulation Resistance Tester

Insulation Resistance Tester.....P13
Insulation Resistance Tester comparative chart.....P56
DM1009S.....P18
DM509S.....P18
HG561H.....P16
M53.....P17
MG500.....P16
MG1000.....P16
MG5000.....P14, 15
PDM1529S.....P17
PDM509S.....P18
PDM5219S.....P17
MΩ Tester.....P19
DG34a.....P19
DG35a.....P19



PC Link System, Digital Multimeter

PC Link System.....P21
Digital Multimeter.....P22
Digital Multimeter comparative chart.....P57~P59
CD732.....P27
CD770.....P26
CD771.....P26
CD772.....P26
CD800a.....P27
CD800b.....P28
CD800F.....P28
KP1.....P29
PC20.....P25
PC700.....P24
PC710.....P24
PC773.....P25
PC7000.....P23
PC720M.....P23
PC Link 7.....P21
PM3.....P30
PM33a.....P29
PM300.....P30
PM7a.....P31
PM11.....P30
PS8a.....P31
RD700.....P27
RD701.....P27



Analog Multitester

Analog Multitester.....P33
Analog Multitester comparative chart.....P60~P61
AP33.....P37
CP-7D.....P37
CX506a.....P34
EM7000.....P34
SH-88TR.....P35
SP-18D.....P36
SP20.....P36
SP21.....P35
TA55.....P36
VS-100.....P37
YX360TRF.....P35
YX-361TR.....P34



Various Instruments

Lux Meters.....P39
LX2.....P39
LX3132.....P39
Optical/Laser Power Meter.....P40
LP1.....P40
OPM35S.....P40
OPM37LAN.....P40
Thermo Meter.....P43
TH3.....P43
Tachometer / Speed Meter.....P41
SE300.....P41
SE9100.....P41 **NEW**



Earth Tester.....P42
PDR302.....P42

LCR Meter.....P42
LCR700.....P42

Detector.....P43
3 phase detector KS1.....P43
3 phase detector KS3.....P43 (Motor Rotation Tester)
Voltage detector KD2.....P43

Assembly Training Kit.....P44
KIT-8D.....P44
PC20TK.....P44

Calibrator.....P45
STD5000M.....P45



Sanwa's mission

Sanwa sees its mission as contributing to global environmental conservation and energy management through continuous advances in electrical and on-site measuring instruments, while “putting the trust and satisfaction of customers first”.

Clamp Meters


What is Clamp Meter?

Clamp meters are convenient measuring instruments that allow the measurement of current simply by clamping a wire while being energized without cutting a circuit. In cases of measurement by a multimeter and digital multimeter, the circuit must be cut to measure current. In contrast, with a clamp meter, current can be measured simply by clamping a live wire over its sheath. In addition to its simple operation, it allows safe measurement of a higher current since it is not directly connected to the circuit.

Like a multimeter and insulation resistance tester, there are analog and digital types of clamp meters. The measuring range is typically about 20A to 200A or 400A both for DC and AC. As a special type, there are products allowing for the measurement of a higher current of 2,000A. Some types are also available to allow measurements of fine current of few milliamps for the purpose of detecting leakage current. Others allow the measurement by true RMS values for measurement of current of distorted AC waveforms other than of sine waves, for inverter power supply and switching power supply.

Measurement by multimeter


Cut the wiring on the circuit and connect a multimeter in series with the circuit.

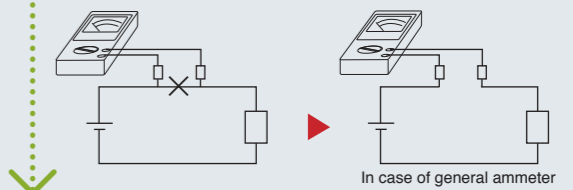

In case of general ammeter

Measurement by clamp meter

Simply clamp the wiring, and current can be measured in safety since it is not directly connected to the circuit.

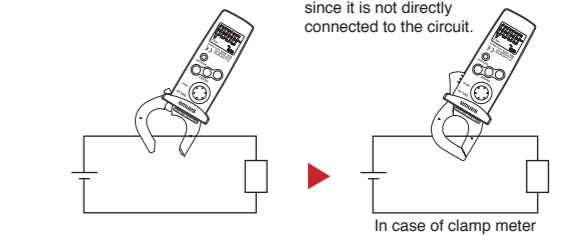

In case of clamp meter

Four key points in choosing a suitable model

1. What are objects to be measured?

Models to be chosen differ depending on what you intend to measure, AC current, DC current or leakage current.

3. Is true RMS measurement required?

A clamp meter of the mean-value type cannot provide accurate results in the measurement of an inverter circuit and a motor circuit having many distortions. To make measurements for such circuits, a clamp meter of the true RMS type is required.

2. Measurable conductor sizes

A wide range of sizes are available from 21mm to 150mm in diameter according to measurable conductor sizes and measuring places.

4. Other functions

Other types are available featuring a tester function and recorder output function in addition to current measurement.

True RMS measurement

A clamp meter of the mean value type detects the mean value of sine waves in AC measurement, multiplies the value 1.11 times (sine wave AC) and indicates it as the effective value. It even indicates the waveform of a distorted wave and the non-sine wave with different form factors in values multiplied 1.11 times, so indication errors occur as a result. For these measurements, use a clamp meter of the true RMS type that detects and indicates the true RMS value itself.

Measurement of leakage current


Unlike ordinary current measurement, it is required to clamp all two wires (two-wire single-phase) or three wires (three-wire single-phase or three-wire three-phase) for measuring leakage current. The earthing wire also can be measured.

Measuring method by clamp meter

For measuring current using a clamp meter, clamp one conductor (wire) to be measured. If two wires (parallel lines) are clamped, current measurement cannot be made. Take a measurement at the center of the core of the clamped portion to minimize measuring errors. A line separator is conveniently used in measuring the consumption current of home electric appliances. There are line separators that can amplify measured current 10 times to allow measurement by amplifying current lower than 1A. When DC current (DCA) is measured using a clamp meter for DC current, the current is indicated in a negative value (-) when the direction of the current is reversed. By using this function, you can know whether your car battery is at the state of charge or discharge.


Correct measurement

Clamp one conductor at the center of transverse.




Wrong measurement

Clamp more than one conductor.




Force is applied at the end of transverse.

Measurement by clamp meter

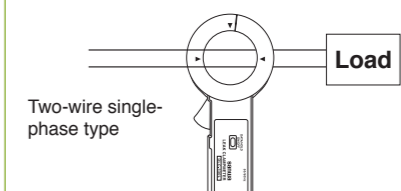

Two-wire single-phase type

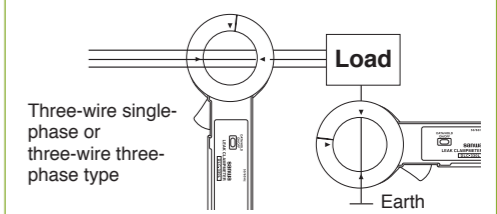

Three-wire single-phase or three-wire three-phase type



Clamp Meter AC


**DCL1000 (with case)****Lower cost lightweight & DMM functions**

- Lightweight approx. 290g
- Large LCD
- Easy to use large size data hold button

Sampling rate : 3 times / sec.
AC frequency bandwidth : 50~500Hz
Safety : IEC61010-2-032, CAT. III 600V

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
Test lead : TL-21M, TLF-120



DCL1000	Measuring range	Best accuracy	Resolution
ACA	400/1000A	± (1.7%+5)	0.1A
DCV	400m/4/40/400/600V	± (1.2%+3)	0.1mA
ACV	400m/4/40/400/600V	± (2.2%+5)	0.1mV
Resistance	400/4k/40k/400k/4M/40MΩ	± (1.2%+4)	0.1Ω
Continuity	Buzzer sounds at between 0Ω and 65Ω (±35Ω). Open voltage: approx. 0.4V		
Diode test	Open voltage: approx. 1.6V		
Bandwidth	ACA: 50/60Hz (sine wave), ACV: 50~500Hz (sine wave)		
Display	4000		
Withstand voltage	5550VAC		
Battery	R03X2		
Clamp diameter/Conductor size	42mm/20X54mm		
Size / Mass	H238XW95XD45mm/290g		
Standard accessories included	Test lead (TL-23a), Carrying case, Instruction manual		


**DCM400 (with case)****Low cost & DMM functions**

- 4000 count / 42 segment analog bar graph
- Frequency measurement by clamping and using test lead
- Data hold
- Continuity check buzzer
- Auto power off (30min.)
- Low battery power indication

Sampling rate : 2 times / sec. for numeral display
AC frequency bandwidth : 50~60Hz (ACA : 1.9%±5), 60~500Hz (ACA : 2.5%±5), 50~500Hz (ACV)
Safety : IEC61010-1 (EN61010-1) CAT. III 300V. / CAT. II 600V

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
Test lead : TL-21M, TLF-120



DCM400	Measuring range	Best accuracy	Resolution
ACA	40/400A	± (1.9%+5)	0.01A
ACV	400/600V	± (1.5%+5)	0.1V
DCV	400/600V	± (1%+2)	0.1V
Resistance	400Ω		0.1Ω
Frequency (A)	20~4k/10kHz		0.01Hz
Frequency (V)	4k/40k/400k/1MHz	± (0.1%+1)	0.01kHz
Continuity	Buzzer sounds at less than approx. 40Ω. Open voltage : approx. 1.5V		
Bandwidth	50~60Hz (ACA : 1.9%±5) 60~500Hz (ACA:2.5%±5), 50~500Hz (ACV : 1.5%±5)		
Display	4000		
Clamp diameter/Conductor size	25mm/10X34mm		
Withstand voltage	Less than 3700Vrms		
Battery	R03X2		
Size / Mass	H193XW50XD28mm/approx. 230g		
Standard accessories included	Test lead (TL-23a), Carrying case (C-DCM400), Instruction manual		

Clamp Meter AC (Analog Type)


**CAM600S (with case)****AC600A, AMT functions**

- AC current measurable max. 600A
- Long analog pointer with "pointer lock" function
- Temperature measurement with optional probe

Display : Analog pointer
AC frequency bandwidth : 50 / 60Hz

Optional accessories

Temperature probe : T-THP
Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
Test lead : TL-21M, TLF-120



CAM600S	Measuring range	Accuracy
ACA	6/15/60/150/600A	±3% of full scale*
ACV	150/300/600V	±3% of full scale
DCV	60V	±3% of full scale
Resistance	1k/100kΩ	3% of arc
Temperature	-10~+200°C (optional probe "T-THP" is necessary)	
Bandwidth	50/60Hz	
Clamp diameter/Conductor size	36mm/10X50mm	
Withstand voltage	5550VAC	
Battery	R03X1	
Size / Mass	H221XW97XD43mm/420g	
Standard accessories included	Test lead (TL-21a), Carrying case (C-CAM6), Instruction manual	

*4% in 300~600A

Clamp Meter DC/AC


**DCM400AD (with case)****Suitable for automotive maintenance & DMM functions**

- 4000 count / 42 segment analog bar graph
- DC / AC current 40A/400A
- Data hold / Range hold
- Relative value
- Continuity check buzzer
- Auto power off (30min.)
- Low battery power indication

Display : numeral display 3999, bar graph 42 segments
Sampling rate : 2 times / sec. 20 times / sec. for bar graph
AC frequency bandwidth : 50~500Hz
Safety : IEC61010-1 (EN61010-1) CAT. III 300V / CAT. II 600V

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
Test lead : TL-21M, TLF-120


**DCM-22AD (with case)****DC / AC compact type & DMM functions**

- DC / AC current measurable max. 200A
- Continuity check buzzer
- Data hold
- Slim core for narrow space

Display : numeral display 1999
Sampling rate : 2 times / sec. for numeral display
AC frequency bandwidth : 40~400Hz (ACA), 40~500Hz (ACV)

Optional accessories

Clip adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
Test lead : TL-91M




Clamp Meter AC+True RMS

**DCL11R (with case)****RMS mini clamp meter with backlight**

- True RMS
- Compact pocket size
- Data hold
- Backlight
- Auto power off (approx.15min.) (cancelable)

Sampling rate : approx. 2 times / sec.
Safety : IEC61010-1, IEC61010-2-030 CAT.III300V
IEC61010-2-32



DCM400AD	Measuring range	Best accuracy	Resolution
ACA	40/400A	± (2%+10)	0.01A
DCA	40/400A	± (2.5%+10)	0.01A
ACV	400/600V	± (1.5%+5)	0.1V
DCV	400/600V	± (1%+2)	0.1V
Resistance	400Ω	± (1%+2)	0.1Ω
Continuity	Buzzer sounds at less than approx. 40Ω. Open voltage : approx. 1.5V		
Bandwidth	50~500Hz		
Display	4000		
Clamp diameter/Conductor size	25mm/10X34mm		
Withstand voltage	Less than 3700Vrms		
Battery	LR03X2		
Size / Mass	H193XW50XD28mm/approx. 230g		
Standard accessories included	Test lead (TL-23a), Carrying case (C-DCM400), Instruction manual		



DCM-22AD	Measuring range	Best accuracy	Resolution
ACA	20/200A	± (2%+5)	0.01A
DCA	20/200A	± (2%+2)	0.01A
ACV	2/20/200/500V	± (2%+5)	0.001V
DCV	2/20/200/500V	± (1.5%+2)	0.001V
Resistance	2k/20k/200k/2000kΩ	± (2%+5)	0.001kΩ
Continuity	Buzzer sounds at less than approx. 400Ω. Open voltage : approx. 0.43V		
Bandwidth	40~400Hz (ACA), 40~500Hz (ACV)		
Display	1999		
Clamp diameter/Conductor size	23mm/10X21mm		
Withstand voltage	2000VAC		
Battery	R03X2		
Size / Mass	H179XW56XD26.5mm/140g		
Standard accessories included	Test lead (TL-61), Carrying case (C-CL), Instruction manual		



DCL11R	Measuring range	Best accuracy	Resolution
ACA	60/300A	± (2%+5)	0.01A
Bandwidth	45~400Hz		
Display	6000		
Clamp diameter/Conductor size	22mm/10X25mm		
Battery	LR03X2		
Size / Mass	H145XW54XD31mm/approx. 120g		
Standard accessories included	Carrying case (C-DCL10), Instruction manual		

Clamp Meter AC+True RMS

**DCL1200R (with case)****RMS lightweight & DMM functions**

- Lightweight approx. 290g
- True RMS
- Large LCD with Backlight
- Easy to use large size data hold button
- AC voltage detection function (EF)
- Auto V / Ω detection
- MAX. 1200A measurable

Display : numeral display 6000
Sampling rate : 5 times / sec.
AC frequency bandwidth : 50 / 60Hz
Safety : IEC61010-2-032 CAT. III 600V Max.

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120



DCL1200R	Measuring range	Best accuracy	Resolution
ACA	400/1200A	± (1.7%+5)	0.1A
DCV	6/60/600V	± (0.7%+3)	1mV
ACV	6/60/600V	± (1.7%+5)	1mV
Auto resistance	6k/60k/600k/6M Ω	± (1.2%+4)	1 Ω
Resistance	600 Ω	± (2.2%+8)	0.1 Ω
Frequency	9.999/99.99/999.9/9.999k/30kHz	± (0.6%+4)	0.001Hz
Capacitance	100n/1000n/10 μ /100 μ /2000 μ F	± (3.7%+5)	0.1nF
Continuity	Buzzer sounds at between 0 Ω and 155 Ω (\pm 145 Ω). Open voltage: approx. 0.4V		
Diode test	Open voltage: approx. 1.6V		
Voltage detection	Buzzer sounds and EF mark displays on LCD. Detection range 15V and over, 50/60Hz		



DCL3000R	Measuring range	Best accuracy	Resolution
ACA	30/300/3000A	± (3%+5)	0.01A



DCM60R	Measuring range	Best accuracy	Resolution
ACA	199.9/600A	± (2%+5) (50~60Hz) ± (2.9%+5) (60~400Hz)	0.1A
ACV	199.9/600V	± (1.5%+5) (50~400Hz)	0.1V
Resistance	199.9 Ω	± (1.0%+8)	0.1 Ω



DCM660R	Measuring range	Best accuracy	Resolution
ACA	66/660A	± (2%+5)	0.01A
ACV	600V	± (1.2%+5)	0.1V
DCV	600V	± (1%+2)	0.1V
Resistance	660 Ω	± (1%+7)	0.1 Ω
Frequency (A)	660/6.6k/30k	± (0.2%+1)	0.1Hz
Frequency (V)	660/6.6k/66k/100k	± (0.2%+1)	0.1Hz

Clamp Meter DC/AC+True RMS

**DCL31DR (with case)****DC/AC RMS mini clamp meter with peak hold function**

- True RMS
- Compact pocket size
- Peak hold
- Data hold
- Backlight
- Auto power off (approx. 15min.) (cancelable)

Sampling rate : 2 times / sec.
Safety : IEC61010-1, IEC61010-2-030 CAT. III 300V
 IEC61010-2-32

DCM2000DR (with case)**DC / AC current measurable max. 2000A & DMM functions**

- Dual display shows voltage/current and its frequency
- True RMS
- EF (Electric Field) sensing
- VFD (Variable Frequency Drive) frequency measurement
- Low input impedance voltage measurement capable of attenuating the effects of ghost voltage
- Data hold, Range hold
- Relative value
- Peak hold (5ms)
- Auto Power Save (30min.) (cancelable)

Sampling rate : approx. 5 times / sec
Safety : IEC61010 CAT. IV 1000V

DCM600DR (with case)**Suitable for maintenance of vehicle, hybrid vehicle, electric vehicle & DMM functions**

- AC / DC current measurable max. 600A
- True RMS
- Peak hold (1ms)
- ※When the peak button is pressed, the measuring range will be fixed to the 600A range.
- Relative value measurement
- Data hold, Auto power save
- LCD with back light

Sampling rate : 3 times / sec. for numeral display,
Safety : IEC61010-1 CAT. III 600V, IEC61010-2-032, IEC61010-031

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120

Clamp Meter Leak current

**DLC460F (with case)****Multifunctional Io Leakage Clamp Meter**

- Low-pass filter function cuts current value of high frequency
- Max/Min value hold, Data hold
- Backlight
- Auto power save (30min.)

Sampling rate : 2 times / sec.
Safety : IEC61010-1 CAT. III 600V, IEC61010-2-032, IEC61010-031

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC



DCL31DR	Measuring range	Best accuracy	Resolution
ACA	60/400A	± (2.0%+5)	0.01A
DCA	60/400A	± (2.0%+5)	0.01A



DCM2000DR	Measuring range	Best accuracy	Resolution
ACA	200/2000A	± (2.0%+5)	0.1A
DCA	200/2000A	± (2.0%+5)	0.1A
ACV	6/60/600/1000V	± (1.2%+5)	0.001V
DCV	6/60/600/1000V	± (0.5%+5)	0.001V
Resistance	600/6k/60k/600k/6M/40M Ω	± (0.5%+5)	0.1 Ω
Frequency	10~1999Hz	± (0.1%+4)	0.01Hz
Capacitance	60n/600n/6 μ /60 μ /600 μ F/2000 μ F	± (2.0%+5)	0.01nF
Continuity	Buzzer sounds at between 10 Ω and 200 Ω Open voltage: approx. 0.5V		
Diode test	Open voltage: approx. 1.8V		



DCM600DR	Measuring range	Best accuracy	Resolution
ACA	60/600A	± (2%+5)	0.01A
DCA	60/600A	± (2%+5)	0.01A
ACV	600V	± (1.2%+5)	0.1V
DCV	600V	± (1%+2)	0.1V
Resistance	999.9 Ω	± (1%+7)	0.1 Ω
Continuity	Buzzer sounds at less than 40 Ω . Open voltage: approx. 2.9V		



DLC460F	Measuring range	Best accuracy	Resolution
ACmA	60m/600mA	± (1.2%+5)	0.01mA
ACA	60/400A	± (1.2%+5)	0.01A
ACV	600V	± (1.2%+5)	0.1V
DCV	600V	± (1.0%+2)	0.1V
Resistance	999.9 Ω	± (1.0%+8)	0.1 Ω

**DCL3000R (with case)****ACA Clamp meter with flexible CT**

- Flexibility facilitating conductor clamping even in narrow space
- AC current measurable max. 3000A
- True RMS
- Data hold, Max/Min value hold
- Backlight

Sampling rate : approx. 2 times / sec.
Safety : IEC61010 CAT. IV 600V

**DCM60R (with case)****Low cost & DMM functions**

- True RMS
- Measurable AC 0.1A~600A
- ACV & Resistance measurement
- Small design & easy to carry
- Data hold
- Continuity check buzzer

Sampling rate : approx. 2 times / sec.
AC frequency bandwidth : 50~400Hz
Safety : IEC61010-1,
 IEC61010-2-030 CAT. III 300V /CAT. II 600V,
 IEC61010-2-032, IEC61010-2-033, IEC61010-31

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120

**DCM660R (with case)****Suitable for Electric work and air conditioning & DMM functions**

- AC current measurable max. 660A
- True RMS
- Inrush current measurement
- Max/Min value hold
- Frequency measurement by clamping and using test lead
- Data hold, Auto power save
- LCD with back light

Sampling rate : 3 times / sec. for numeral display
Safety : IEC61010-1 CAT. III 600V, IEC61010-2-032, IEC61010-031

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120

Clamp Sensors

What is Clamp Sensor?

A clamp sensor allows the measurement of AC and DC current and fine AC current of milliampere level (leakage current) by connecting to a DMM without connecting a wire as in the case of a clamp meter. Its combined use with DMM of PC series connectable to a PC allows the recording and monitoring of the measurements on a PC of consumption current for home electric appliances and leakage current running through an earthing wire.

Measurable current differs by models. Check it before use.

ACA **CL-22AD, CL3000**

DCA **CL-22AD, CL33DC**

Prior to making a measurement

The following description is given on a digital multimeter of 6000-count display type (PC700), but it also applies to 1999-count and 3999-count display types. Check a DMM compatibly used with a clamp sensor (Refer to the information of compatible models of each product in p. 10, 11). Values are indicated in mV, which should be read in mA by multiplying a factor for each product. Models RD700 and RD701 have a separate fixed range of 400.0mV AC / DC (high impedance 1000MΩ) for exclusive use with an adaptor probe to give clear viewing of milli-volt display.


e.g. When PC700 is used with CL-22AD

Fix the range at 600mV and set the clamp probe at 20~200A range. In this case, the measured value is obtained by multiplying the indicated value of the multimeter by the factor given below.

e.g. When CL-22AD is used

DCA measurement → DC600mV range
 ACA measurement → AC600mV range
 20A range...Reading×0.1
 200A range...Reading×1
 When CL-22AD is set to the 20A range, it will be measured as 1.900A if the DMM indicates 19.00mV (19.00×0.1).

Connecting DMM and CL-22AD

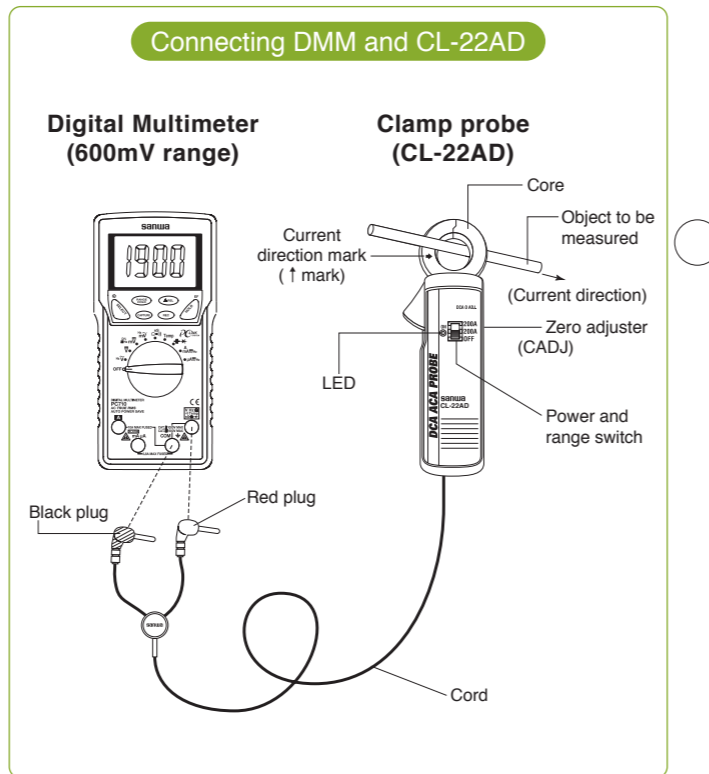

Clamp Sensor



CL33DC (with case)

DC current

■ R03×2 Length : 1.8m Battery life : approx. 70H

CL33DC	DC300A	DC30A	Applicable digital multimeter
Resolution	0.1A	0.01A	PC7000 PC720M PC710 PC700 PC5000a PC510a PC500a PC773 PC20 RD701 RD700 CD772 CD771 CD770 CD750P CD731a CD732
Minimum scale	5A 10A	0.5A 1A	TA55 (Analog)
Core diameter	φ 23mm		
Size / Mass	H179×W56×D26.5mm/approx. 120g		
Standard accessories included	Carrying case (C-CL), Instruction manual		

Resolution of TA55 (Analog) on 1999 display when measuring 199A max. at 300A range and 19A max. at 30A range
 Resolution is one digit bigger at the upper range.
 Output voltage : DC300mV when measuring max. current at each range.



CL-22AD (with case)

DC / AC current

■ R03×2 Length : 1.8m Battery life : approx. 70H

CL-22AD	DC200A	DC20A	AC200A	AC20A	Applicable digital multimeter
Resolution	0.1A	0.01A	0.1A	0.01A	PC7000 PC720M PC710 PC700 PC5000a PC510a PC500a PC773 PC20 RD701 RD700 CD772 CD771 CD770 CD750P CD731a CD732
Core diameter	φ 23mm				
Size / Mass	H179×W56×D26.5mm/approx. 120g				
Standard accessories included	Carrying case (C-CL), Instruction manual				

Output voltage : DC200mV/AC200mV (0~400Hz) when measuring max. current at each range.
 Waveform measurement by oscilloscope is impractical.



CL3000 (with case)

AC current, Flexible type

■ LR03×2 Length : 1.8m Battery life : approx. 110H

CL3000	AC30/300/3000A	Applicable digital multimeter
Accuracy	±(2.0%+0.3%FS)	PC7000 PC720M PC710 PC700 PC773 PC20 RD701 RD700 CD772 CD771 CD770 CD750P CD731a CD732
Frequency range	45~65Hz	
Output impedance	250Ω and less	
Core diameter	Approx. φ 150mm max.	
Size / Mass	H120×W70×D26mm/approx.300g	
Standard accessories included	Carrying case (C-CL3000), Instruction manual	

* Output voltage : AC3V when measuring max. current at each range.

Insulation Resistance Testers

What is Insulation Resistance Tester?

The measurement of insulation resistance is performed to check the insulation status of electric equipments and circuits, which constitutes one of the important measuring items for safety control. The measurement of the insulation of electric equipments and circuits is made using an insulation resistance tester by stopping the operation of the electric equipments and circuits (by stopping power distribution). Voltage of several megohms to tens of megohms is measured in case of the measurement of insulation resistance of electronic parts and electric equipments, and voltage of 1MΩ or less is measured in case of electric works for interior wiring and others.

Is not the resistance range of a multimeter adequate for the measurement of insulation resistance?

The resistance of a digital multimeter or multimeter covers the applied voltage (measured voltage) of approx. 0.3V up to 12V. An insulation resistance tester needs to make measurements at voltage higher than the working voltage of a circuit and electric and electronic equipment to be measured. The table on the right lists examples of rated voltage and uses of the insulation resistance tester.

Examples of major applications of insulation resistance tester

Rated measurement voltage	General electric equipments	Electric equipments and circuits
	Insulation measurement at safe voltage	
25V 50V	Insulation measurement of telephone circuit equipments and explosion-proof equipments	Insulation measurement of telephone circuits
100V 125V	Insulation measurement of control equipments	Insulation measurement for maintaining and controlling low-voltage distribution wiring and equipments of 100V or less Insulation measurement for maintaining and controlling low-voltage wiring and equipments of 200V class or lower
250V	Insulation measurement of low-voltage distribution circuits and equipments	Insulation measurement for maintaining and controlling low-voltage wiring and equipments of 400V class or lower Insulation measurement of 100V, 200V and 440V classes at the time of new installation
500V	Insulation measurement of newly installed distribution circuits, and circuits and equipments of 600V or less (General)	Insulation measurement for maintaining and controlling low-voltage wiring and equipments of lower than 600V Insulation measurement of 100V, 200V and 400V distribution wiring at the time of new installation
1000V	Insulation measurement of circuits, equipments, and facilities of higher than 600V (General)	Insulation measurement of equipments normally operating at high working voltage (e.g. high-voltage cable, high-voltage electric equipment, and communications equipment using high voltage)

Three key points in choosing a suitable model

1. Analog type or digital type?

Analog type is suitable for visually checking the measurement. Digital type is suitable for verifying the measurement by precise values.

2. What do you like to measure by your insulation resistance tester?

For measurement of electronic circuits and the like (See Figure ① below)
→ For easy reading of higher resistance : DM series / Digital type
For use in measurement in electric works and the like (See Figure ② below)
→ For easy reading of lower resistance : PDM series / Digital type

3. Required rated voltage

A wide voltage range is available from 15V (optimum for maintaining and controlling elevators) up to 1000V / 4000MΩ
There are types allowing two to seven ranges by one unit.

Measuring method of low-voltage circuit

In order to measure the insulation resistance of a low-voltage circuit, use an insulation resistance tester with the rated voltage of 500V. Open switches in the distribution board, shut off the power distribution and measure the insulation resistance between wires on the circuit and between wire and ground. If the measured value is below the reference value, open all branch switches and make measurements separately for each branch line of the mains line. The insulation resistance value of the low-voltage circuit is stipulated according to the Electrical Equipment Standard.

Use voltage class of circuit	Insulation resistance value
300V or less	When voltage to ground is 150V or less (Voltage to ground: Voltage between wire and the earth in case of a ground type circuit, and voltage between wires in case of a non-ground type circuit. The same applies hereinafter.) 0.1MΩ
	Other cases 0.2MΩ
More than 300V	0.4MΩ

Scale-division method of the 1st and 2nd effective measurement range

① Scale of DM series



② Scale of PDM series



MG5000



MG5000

This instrument is a High voltage Insulation resistance tester for use in measurement of Insulation Resistance of a power line and power equipment within the range of 600V under CAT.IV.

- Test voltage DC5000V/2500V/1000V/500V/250V
- Insulation Resistance up to 1TΩ
- Short circuit current up to 4mA
- Dielectric Absorption Ratio (DAR)
- Polarisation Index (PI)
- Auto discharge function
- Data hold(Auto)
- Auto power save:
Power save about 10 minutes after the last operation

Display : numeral display 1200
Sampling rate : 3 times / sec.
Safety : IEC61010 CAT.IV 600V



AP OFF	DATA HOLD	BACK LIGHT	AD	AUTO	5000V 1000GΩ	2500V 100GΩ	1000V 2000MΩ	500V 1000MΩ	250V 100MΩ
--------	-----------	------------	----	------	-----------------	----------------	-----------------	----------------	---------------

	250V	500V	1000V	2500V	5000V	
Measuring range						
Test Voltage(DC)	250V	500V	1000V	2500V	5000V	
Range	0.0~104.9MΩ	0.0~99.9MΩ 80~1049MΩ	0.0~99.9MΩ 80~999MΩ 0.80~2.09GΩ	0.0~99.9MΩ 80~999MΩ 8.0~104.9GΩ	0.0~99.9MΩ 80~999MΩ 0.80~9.99GΩ 8.0~99.9GΩ	80~1000GΩ 1001~1199GΩ
Accuracy	±5%+3	±5%+3	±5%+3	±5%+3	±5%+3	±20%
Open circuit voltage	DC250V 0%~+20%	DC500V 0%~+20%	DC1000V 0%~+20%	DC2500V 0%~+20%	DC5000V 0%~+20%	-
Rated test current	3mA±0.5mA					
Short circuit current	3mA~4mA					
Voltage measurement	AC : 30~1000V(50/60Hz), DC : 30~1000V, Accuracy : ±(2% +3dgt)					

LCD	Bar graph : 36 points DAR/PI value : 9.99 Timer : 99:59(min : sec)
Overload indication	V function : "OL" displayed with buzzer beep Insulation function : "OL" displayed
Max. power consumption	Approx. 18 VA (measurement at 5000 V/approx. 1.8 MΩ)
Battery Monitor	4-step indication
IP rate	IP54
Battery	LR14 x 8
Size / Mass	H188 x W225 x D97mm / 1750g(Batteries included)
Standard accessories included	Test lead(TL-5K) LINE lead(TL-5K-R:Red,3m), EARTH lead (TL-5K-B:Black,3m), GUARD lead (TL-5K-G:Green,3m), Alligator clip (TL-5K-A), Test probe (TL-5K-P), Hook probe (TL-5K-H) Carrying case(C-MG5K), Instruction manual, Battery(LR14 x 8)

Optional accessories

LINE lead : TL-5K-15 (Red,15m)



C-MG5K



TL-5K

TL-5K-15

Digital Type



MG1000 MG500

Allows you to measure insulation resistance more safely by avoiding operation mistakes.

- Hot-line state (30V minimum) detection
- Large volt mark with the buzzer sound
- Automatic data hold function
- Bargraph just like analog meter
- Large display with backlight
- Easy to use & tough body

Display : numeral display 4000 Sampling rate : 2 times / sec.
Safety : IEC61010 CAT.III 600V

Optional accessories

Clip adapter : CL-16
Test lead : TLF-120 (MG500 Only)

CE



CE

Front cover image ▶



APS	DATA HOLD	BACK LIGHT	AD	AUTO
1000V 4000M Ω	500V 4000M Ω	250V 4000M Ω		

MG1000	Measuring range	Best accuracy	Resolution
M Ω	4M/40M/400M/4000M Ω	± (3%+4)	0.001M Ω
Test voltage	1000/500/250V		
ACV/DCV	600V (AC/DC Automatic detection)	± (3%+2)	1V
Ω	4000 Ω (Buzzer and ALARM indicator)	± (3%+3)	1 Ω
Ω	40 Ω	± (3%+10)	0.01 Ω

Open circuit voltage	1 to 1.3 times of nominal test voltage
Rated current	1.0~1.2mA
Short-circuit current	2mA or less
Live circuit detection	At ≥30V AC/DC or more, inhibits test, buzzer sounds and ALARM indicator lights up.
Battery	LR6×6
Size / Mass	H170×W142×D57mm/approx. 600g
Standard accessories included	Test Lead (TL-112a), Strap (ST-50), Instruction Manual

APS	DATA HOLD	BACK LIGHT	AD	AUTO
500V 4000M Ω	250V 4000M Ω	125V 4000M Ω		


MG500	Measuring range	Best accuracy	Resolution
M Ω	4M/40M/400M/4000M Ω	± (3%+4)	0.001M Ω
Test voltage	500/250/125V		
ACV/DCV	600V (AC/DC Automatic detection)	± (3%+2)	1V
Ω	4000 Ω (Buzzer and ALARM indicator)	± (3%+3)	1 Ω
Ω	40 Ω	± (3%+10)	0.01 Ω

Open circuit voltage	1 to 1.3 times of nominal test voltage
Rated current	1.0~1.2mA
Short-circuit current	2mA or less
Live circuit detection	At ≥30V AC/DC or more, inhibits test, buzzer sounds and ALARM indicator lights up.
Battery	R6×6
Size / Mass	H170×W142×D57mm/approx. 600g
Standard accessories included	Test Lead (TL-112a), Strap (ST-50), Instruction Manual

AP OFF	DATA HOLD	BACK LIGHT	AD	AUTO
15V 21M Ω	25V 21M Ω	50V 21M Ω		
100V 110M Ω	125V 110M Ω	250V 110M Ω	500V 110M Ω	

HG561H	Measuring range	Best accuracy	Resolution
M Ω	15/25/50V 9.99M/21.0M Ω 100/125/250/500V 9.99M/99.9M/110M Ω	±(2%+5)	0.1M Ω
Test voltage	15/25/50/100/125/250/500V		
ACV/DCV	600V (AC/DC Automatic Detection)	±(1.6%+7)	0.1V
Ω	999.9/99.99k/999.9k Ω	±(1.5%+7)	0.1 Ω

Insulation Resistance (Level meter)	15/25/50V 5 Levels(LED light up/blinking) 100/125/250/500V 7 Levels(LED light up/blinking)
Continuity	Buzzer sounds at 30 Ω or less
Rated current	1.0~1.2mA
Battery	LR03×4
Size / Mass	H139×W91×D29mm/approx. 230g
Standard accessories included	Measurement probe (TL-561), Alligator clip (CL-561), Carrying case (C-DG3a), Instruction manual

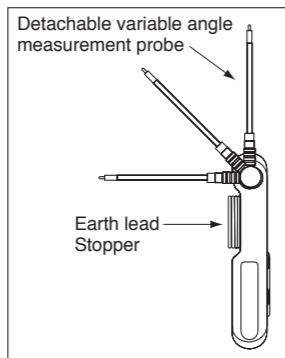

CE

HG561H

Pocket size, 7 test voltage ranges

- Test voltage selection mode
- LED level meter shows M Ω
- Easy-to-read LCD with fixed decimal point
- Automatic data hold function
- LCD with backlight & LED light for dark place

Sampling rate : approx. 2 times / sec.
Safety : IEC61010 CAT.III 300V CAT.II 600V

Digital Type



M53

2 test voltage ranges for elevator maintenance

- Test voltage DC500V / 15V
- Auto range
- Auto power off (1min.)
- Low battery power indication
- Remote speed measurement (Speed meter SE-9000 is necessary.)

Display : numeral display 1999

Optional accessories

Carrying case : C-M53

Analog Type



CE

PDM1529S

3 test voltage ranges

- Test voltage DC1000V / 500V/ 250V
- Easy viewing and readable scale graduations
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- Shoulder Strap

Optional accessories

Test lead : TLF-120

Safety : IEC61010-1 CAT.III 600V

Optional accessories

Test lead : TLF-120

PDM5219S

3 test voltage ranges

- Test voltage DC500V/ 250V / 125V
- Easy viewing and readable scale graduations
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- Shoulder Strap

Safety : IEC61010-1 CAT.III 600V

Optional accessories

Test lead : TLF-120

CE

AP OFF	500V 200M Ω	15V 20M Ω
--------	----------------	--------------

M53	
M Ω	2M/20M/200M Ω (3 auto ranges)
ACV	200/750V (2 auto ranges)
	Accuracy Within ± (2%+2)
DCV	200/750V (2 auto ranges)
	Accuracy Within ± (1%+0.5%RNG+1)
DCV	20/750V (2 auto ranges)
	Accuracy Within ± (0.5%+0.5%RNG+1)
Rated current	500V/1.0~1.2mA
Battery	LR6×6
Size / Mass	H175×W115×D55mm/approx. 600g
Standard accessories included	Test lead (red/black with plug) and clip lead connecting to pin (TL-M54), Instruction manual

AD	1000V 200M Ω	500V 100M Ω	250V 100M Ω
----	-----------------	----------------	----------------

PDM1529S	
Insulation resistance (M Ω)	0.5~2~1000~2000M Ω 1000V 0.02~0.1~50~100M Ω 500/250V
Accuracy	±5% of reading (1st effective measurement range : written in thick print above)
	±10% of reading (2nd effective measurement range : written in small type above)
ACV	600V
Accuracy	±5% of full scale (50~60Hz sine wave)
	±5% of full scale
DCV	60V
Accuracy	±5% of full scale
	±5% of full scale
Rated current	1.0~1.2mA
Battery	6LR61 (9V)×1
Size / Mass	H144×W99×D43mm/approx. 310g
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual

AD	500V 100M Ω	250V 100M Ω	125V 100M Ω
----	----------------	----------------	----------------

PDM5219S	
Insulation resistance (M Ω)	0.02~0.1~50~100M Ω 500/250/125V
Accuracy	±5% of reading (1st effective measurement range : written in thick print above)
	±10% of reading (2nd effective measurement range : written in small type above)
ACV	600V
Accuracy	±5% of full scale (50~60Hz sine wave)
	±5% of full scale
DCV	60V
Accuracy	±5% of full scale
	±5% of full scale
Rated current	1.0~1.2mA
Battery	6LR61 (9V)×1
Size / Mass	H144×W99×D43mm/approx. 310g
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual

MΩ Tester

Analog Type



DM1009S

Single test voltage range

- Test voltage DC1000V · 2000MΩ
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- ACV measurement range
- Shoulder Strap

Safety : IEC61010 CAT. III 600V

Optional accessories

Test lead : TLF-120



DM509S

Single test voltage range

- Test voltage DC500V · 1000MΩ
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- Shoulder Strap

Safety : IEC61010 CAT. III 600V

Optional accessories

Test lead : TLF-120



PDM509S

Single test voltage range

- Test voltage DC500V · 100MΩ
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- ACV measurement range
- Shoulder Strap

Safety : IEC61010 CAT. III 600V

Optional accessories

Test lead : TLF-120



AD 1000V 2000MΩ

DM1009S	
Insulation resistance (MΩ)	1~2~1000~2000MΩ
Accuracy	±5% of reading (1st effective measurement range: written in thick print above) ±10% of reading (2nd effective measurement range: written in small type above)
ACV	600V
Accuracy	±5% of full scale (50~60Hz sine wave)
DCV	60V
Accuracy	±5% of full scale
Rated current	1.0~1.2mA
Battery	6LR61 (9V)×1
Size / Mass	H144×W99×D43mm/approx. 310g
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual

AD 500V 1000MΩ

DM509S	
Insulation resistance (MΩ)	0.5~1~500~1000MΩ
Accuracy	±5% of reading (1st effective measurement range: written in thick print above) ±10% of reading (2nd effective measurement range: written in small type above)
ACV	600V
Accuracy	±5% of full scale (50~60Hz sine wave)
DCV	60V
Accuracy	±5% of full scale
Rated current	1.0~1.2mA
Battery	6LR61 (9V)×1
Size / Mass	H144×W99×D43mm/approx. 310g
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual

AD 500V 100MΩ

PDM509S	
Insulation resistance (MΩ)	0.05~0.1~50~100MΩ
Accuracy	±5% of reading (1st effective measurement range: written in thick print above) ±10% of reading (2nd effective measurement range: written in small type above)
ACV	600V
Accuracy	±5% of full scale (50~60Hz sine wave)
DCV	60V
Accuracy	±5% of full scale
Rated current	1.0~1.2mA
Battery	6LR61 (9V)×1
Size / Mass	H144×W99×D43mm/approx. 310g
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual

MΩ Tester



DG34a

Hybrid pocket size MΩ Tester + Clamp meter

- Lightweight approx. 160g
- Easy to use, pocket size
- ACV / DCV measurement range
- DCA / ACA measurement range
- Inorganic EL backlight
- Test leads holder with thermo plastic elastomer which is easy to reel
- Current measurement with thin U-shaped current sensor (7mm) at angles of 0 and 180 degrees
- Data hold
- Measurement of relative value
- With Clip adapter

Display : 3999

Sampling rate : 2 times / sec.

Optional accessories

Carrying case : C-DG3a
Clip adapter : CL-13a, CL-15a, TL-9IC

Max 100A DCA ACA DATA HOLD REL BACK LIGHT

500V 400MΩ 250V 400MΩ 125V 400MΩ

DG34a	Measuring range	Best accuracy	Resolution
MΩ	400MΩ	±(3%+3)	0.1MΩ
Test voltage	125/250/500V		
DCV	600V	±(1.1%+3)	1V
ACV	600V	±(1.6%+7)	1V
DCA	100A	±(2.0%+5)	0.1A
ACA	100A	±(2.0%+5)	0.1A
Open circuit voltage	1 to 1.2 times of nominal test voltage		
Rated measurement current	125V/approx.1.25 μA 250V/approx.2.5 μA 500V/approx.5 μA		

Battery : LR03×2

Size / Mass : H130×W75×D19.9mm / approx. 160g

Clamp diameter : φ10mm

Standard accessories included : Clip adapter (CL-DG3a), Instruction manual



DG35a

Hybrid pocket size MΩ Tester + Clamp meter

- Lightweight approx. 160g
- Easy to use, pocket size
- ACV / DCV measurement range
- DCA / ACA measurement range
- Inorganic EL backlight
- Current measurement with thin U-shaped current sensor (7mm) at angles of 0 and 180 degrees
- Data hold
- Measurement of relative value
- With Clip adapter

Display : 3999

Sampling rate : 2 times / sec.

Optional accessories

Carrying case : C-DG3a
Clip adapter : CL-13a, CL-15a, TL-9IC

Max 100A DCA ACA DATA HOLD REL BACK LIGHT

500V 40MΩ 250V 40MΩ 125V 40MΩ

DG35a	Measuring range	Best accuracy	Resolution
MΩ	40MΩ	±(3%+3)	0.01MΩ
Test voltage	125/250/500V		
DCV	600V	±(1.1%+3)	1V
ACV	600V	±(1.6%+7)	1V
DCA	100A	±(2.0%+5)	0.1A
ACA	100A	±(2.0%+5)	0.1A
Open circuit voltage	1 to 1.2 times of nominal test voltage		
Rated measurement current	125V/approx.12.5 μA 250V/approx.25 μA 500V/approx.50 μA		

Battery : LR03×2

Size / Mass : H130×W75×D19.9mm / approx. 160g

Clamp diameter : φ10mm

Standard accessories included : Clip adapter (CL-DG3a), Instruction manual



PC Link System

Enhanced operational efficiency by means of data retrieval software, PC Link 7, which can handle measurements for up to a maximum of 8 channels.

The PC Link system is the software dedicated to a PC for retrieving data outputted from a SANWA digital multimeter (PC series). The operation screen displays graphs in real time to allow you to check changes in measured values (voltage, current, etc.) with ease. Measured data can be saved on a CSV file, so it is easily processed on Excel. The ease of use in a variety of applications from data retrieval, processing and analysis results in its extensive acceptance for business, education and personal use.


PC Link 7 Max 8 Channels



Applicable Model

PC7000, PC720M, PC710
PC700, PC773, PC20, PC20TK

Data acquisition screen

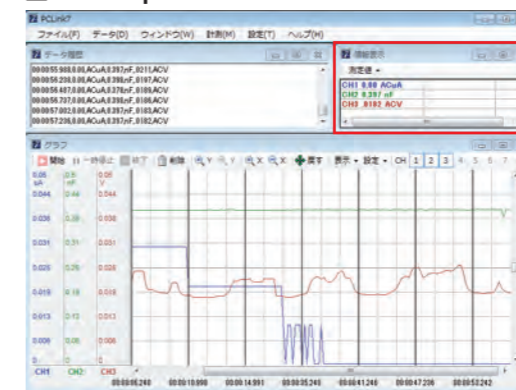


Alert indication




Highly visible alert
Send alert information by e-mails
Save them into files


Multi-window flexible screen layout (Flexible size and position of each window)

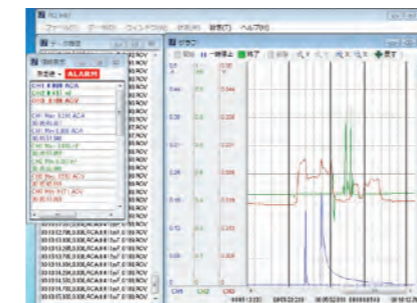

Traditional overlapped graphs and separated graphs by each channel. Also, easily switchable display/hide.

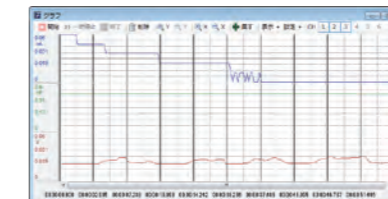

Separated graphs

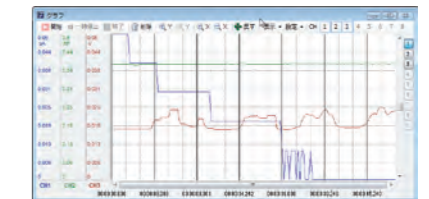

Overlapped graphs

Customizable screen

Major features :

- Automatically detects a port connected with a digital multimeter
- No additional driver installation required with Windows standard USB drivers
- The retrieval interval can be set by seconds. The shortest reading interval of 0.2 – 0.3 seconds depending on the digital multimeter measuring function.
- Allows setting for vertical/horizontal zoom, reading at the cursor position, and Y axis split while retrieving data.
- Allows automatic retrieval by schedule setting.
- Allows data saving into CSV files and sending e-mails of alert information with alarm setting.
- Allows data saving into CSV files with the date and time appended.
- Multi-window, separated graphs by each channel
- Allows automatic e-mail of measurement data.
- Allows limited operations depending on the user with usage restriction function.
- Allows conditional recording by event function.

PC Link 7 operating environment

OS: Windows XP (32bit) / 7 (32bit / 64bit) / 8 (32bit / 64bit) / 10 (64bit) CPU: Pentium IV 1.6GHz or better Memory: 1GB or better Resolution: 800×600 or above

Optional accessories for PC Link products

KB-USB773
Optical link USB



For PC773

KB-USB7
Optical link USB



For PC7 series

KB-USB20
Optical link USB



For PC20, PC20TK

• Microsoft and Windows are registered trademarks or brands of US Microsoft Corporation in the USA and other countries.

Digital Multimeters

What is Digital Multimeter?

A digital multimeter is a convenient measuring instrument that allows by itself the measurement of DC voltage, AC voltage, DC current, AC current and resistance (Pocket type DMM normally cannot be used for the measurement of current for safety reasons). In addition to these basic measuring functions, most models are provided with features such as a diode test function and continuity buzzer. Some of recent products feature the measurement of frequency and capacitor capacity. Some have added functions of maximum and minimum value hold and relative value measurement as well as data hold and range hold functions. The PC series DMMs connect to a PC making it possible to let a PC assume the function of expensive recording meters and recorders.

Advantages of digital multimeters (DMMs)

1. Highly accurate measurement. Higher accuracy (1% or less) compared with an analog multimeter (approximately 3%).
2. Reduced measuring loss due to high internal impedance (low voltage drop between terminals).
3. No parallax reading error occurs as with an analog multimeter.

Four key points in choosing a suitable model

1. What are the necessary measuring functions?

Choose the necessary functions, except voltage and resistance measurement. (including need for the measurement of current (400mA, 10A, 12A, 20A), capacitor, frequency, temperature and measurement of 4-20mA, etc.)

2. Other necessary functions

Functions required differ depending on where the measurement is taken.

- 1) To record measured values concurrently with the process of measurement
 - To fix data by the data hold function.
 - To secure the test lead in the holster.
- 2) To check changes in measured values
 - Measurement of maximum values, minimum values, and relative values.

3. For measurements of waveforms of non-sine waves, choose a model supporting measurements by RMS values.

In measuring distorted sine and non-sine waves (square wave, triangular wave, pulse), significant errors occur in measurement by models making measurements by mean values.

There are two types of RMS values.


AC-Coupled true RMS value: Adapted to measurements of distorted sine and non-sine waves of the AC
 AC + DC-coupled true RMS value: Adapted to measurements of waveform containing a DC component.

4. Other functions

There are other types including a function to transfer data during measurement to a PC in real time and a function to record measured data in a built-in memory. To transfer data to a PC, optional connecting cables and data retrieval software (PC Link or PC Link Plus) are required in addition to a DMM of PC series.


Measurement

Voltage, Resistance measurement

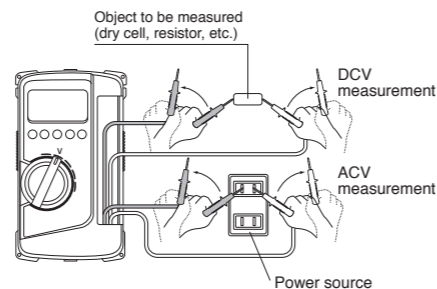


In making measurements, connect your DMM in parallel with an object to be measured. Do not apply signals exceeding the maximum rated input voltage.

Current measurement

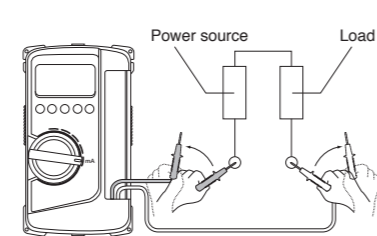

In making measurements, connect your DMM in series with an object to be measured. Do not apply signals exceeding the maximum rated input current.

Diode test

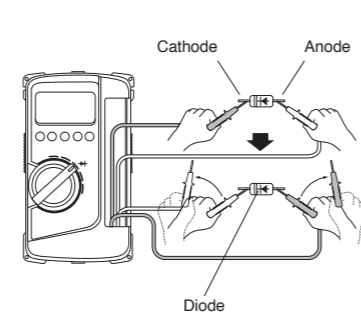

When the black test lead is connected to the cathode side of the diode and the red test lead to the anode side, the forward voltage can be measured. In contrast, if the black test lead is connected to the anode side of the diode and the red test lead to the cathode side, the reverse voltage can be measured and "OL" display appears.

High accuracy & high resolution (PC Link)

PC7000

500000 Count for DCV, Dual Display

- 4-4 / 5digits 50000 count (Selectable 5-4 / 5 digits 500000 count for DCV)
- Dual Display shows voltage/current and its frequency, and AC components and DC components of voltage/current
- AC True RMS
- Low-pass filter for variable frequency drive (VFD) circuit
- Current (mA / μ A) %4-20mA measurement
- Capture (peak hold) 0.8ms in duration
- MAX, MIN, AVG recording mode
- K type temperature -50°C ~ 1000°C
- Frequency measurement (AC sine wave only)
- Logic frequency measurement, duty cycle measurement
- Conductance measurement
- Dual display with backlight
- Data hold, Range hold
- Relative value
- Auto power saving mode (17min.) (cancelable)
- Optical Link USB interface (optional)

Display : numeral display 50000 & 500000 selectable, bar graph 41 segments
Sampling rate : 5 times/sec. for 50000 count, 1.25 times/sec. for 500000 count, 60 times/sec. for bar graph
Safety : IEC61010-1, IEC61010-31 CAT.III 600V Max./CAT. II 1000V Max., EN61326-1
Battery life : Approx. 100h (alkaline battery) at DCV range



High accuracy & built-in memory (PC Link)

PC720M

87,328 points data logging in built-in memory

- 4 digits 9999 count & 3-5/6 digits 6000 count
- AC True RMS
- Dual display with backlight
- Automatic measurement for ACV/DCV/ Ω under low impedance
- High speed bar graph
- Capacitance measurement
- K type temperature -50°C ~ 1000°C
- Frequency measurement (AC sine wave only)
- Logic frequency measurement, duty cycle measurement
- Conductance measurement
- MAX, MIN, MAX-MIN recording mode
- Capture (peak hold) 1ms in duration
- Data hold, Range hold
- Relative value
- Auto power saving mode (30min.) (cancelable)
- Optical Link USB interface (optional)


Data Logging Mode

■ 87,328 data points in built-in memory (single display)
 43,664 data points in built-in memory (dual display)
 ■ Selection of measurement interval
 0.05s/0.1s/0.5s/1s/2s/3s/4s/5s/10s/15s/30s/60s/120s/180s/300s/600s
 ■ Auto-standby mode when a sampling speed of 30s or longer is selected
 ■ Export logged data to PC
 *Optional accessory KB-USB7 and PC Link7 are necessary.
Display : numeral display 9999 & 6000, bar graph 41 segments
Sampling rate : 5 times/sec., 60 times/sec. for bar graph
Safety : IEC61010-1, IEC61010-31 CAT.III 600V Max./CAT. II 1000V Max. EN61326-1
Battery life : Approx. 100h (alkaline battery) at DCV range



PC7000	Measuring range	Best accuracy	Resolution	Input impedance
DCV	500m/5/50/500/1000V	\pm (0.03%+2)	0.01mV	10M Ω
ACV	500m/5/50/500/1000V	\pm (0.5%+40)	0.01mV	
DCA	500 μ /5000 μ /50m/500m/5/10A	\pm (0.1%+20)	0.01 μ A	
ACA	500 μ /5000 μ /50m/500m/5/10A	\pm (0.6%+40)	0.01 μ A	
Resistance	500 Ω /5k/50k/500 Ω /5M/50M/99.99nS ^{*1}	\pm (0.2%+6)	0.01 Ω	
Capacitance	50n/500n/5 μ /50 μ /500 μ /5m/25mF ^{*2}	\pm (0.8%+3)	0.01nF	
Temperature	-50~1000°C (thermocouple K type)	\pm (0.3%+2)	0.1°C	
Frequency	10Hz~200kHz	\pm (0.02%+4)	0.001Hz	
Logic frequency	5Hz~2MHz	\pm (0.002%+4)	0.001Hz	
Duty cycle	0.1%~99.99%	\pm (3d / kHz+2)	0.01%	
dBm	-29.83dBm~54.25dBm	\pm (0.25dB+2)	0.01dB	
Continuity	Buzzer sounds at between 20 Ω and 200 Ω Open voltage : approx. 1.3V			
Diode test	Open voltage : approx. 3V			
Bandwidth	V : 45Hz~1kHz, 1kHz~20kHz (below 500V), A : 40Hz~1kHz			
Fuse / Battery	11A/1000V IR20kA ϕ 10 \times 38 0.4A/1000V IR30kA ϕ 6.3 \times 32	6LR61(9V) \times 1		
Size / Mass	H184 \times W86 \times D52mm/430g (including holster)			
Standard accessories included	Test Lead (TL-23a), Holster (H-700), Thermocouple K type (K-250PC), Instruction manual			

^{*1} nS(Conductance): High-value resistance of Giga-Ohms for leakage measurements. Conductance is the inverse of Resistance, that is S=1/ Ω or nS=1/G Ω
^{*2} Accuracy of film capacitor or equivalent with low leakage.
Optional accessories
 Software : PC Link7
 Optical PC link cable : KB-USB7
 Clamp probe : CL-22AD, CL33DC, CL3000
 Temperature probe : T-300PC (PC Link software is necessary.)
 K-8-250~800
 K type adapter : K-AD
 Test lead : TL-21M, TLF-120
 Carrying case : C-PC7
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC

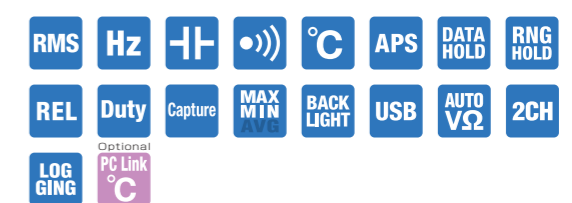

PC720M	Measuring range	Best accuracy	Resolution	Input impedance
DCV	60m/600m/9.999/99.99/999.9V	\pm (0.06%+2)	0.01mV	10M Ω
ACV	60m/600m/9.999/99.99/999.9V	\pm (0.5%+3)	0.01mV	
DCA	600 μ /6000 μ /60m/600m/6/10A	\pm (0.2%+4)	0.1 μ A	
ACA	600 μ /6000 μ /60m/600m/6/10A	\pm (0.6%+3)	0.1 μ A	
Resistance	600 Ω /6k/60k/600 Ω /6M/60M/99.99nS ^{*1}	\pm (0.1%+3)	0.1 Ω	
Capacitance	60n/600n/6 μ /60 μ /600 μ /6m/25mF ^{*2}	\pm (0.8%+3)	0.01nF	
Temperature	-50~1000°C (thermocouple K type)	\pm (0.3%+2)	0.1°C	
Frequency	15Hz~50kHz	\pm (0.04%+4)	0.01Hz	
Logic frequency	5Hz~1MHz	\pm (0.03%+4)	0.001Hz	
Duty cycle	0%~100%	\pm (3d / kHz+2)	0.01%	
Continuity	Buzzer sounds at between 20 Ω and 300 Ω Open voltage : approx. 1.2V			
Diode test	Open voltage : approx. 3.5V			
Bandwidth	V : 40Hz~3kHz, 3kHz~20kHz (below 99.99V), A : 40~1kHz			
Fuse / Battery	11A/1000V IR20kA ϕ 10 \times 38 0.4A/1000V IR30kA ϕ 6.3 \times 32	6LR61(9V) \times 1		
Size / Mass	H184 \times W86 \times D52mm/430g (including holster)			
Standard accessories included	Test Lead (TL-23a), Holster (H-700), Thermocouple K type (K-250PC), Instruction manual			

^{*1} nS(Conductance): High-value resistance of Giga-Ohms for leakage measurements. Conductance is the inverse of Resistance, that is S=1/ Ω or nS=1/G Ω
^{*2} Accuracy of film capacitor or equivalent with low leakage.
Optional accessories
 Software : PC Link7
 Optical PC link cable : KB-USB7
 Clamp probe : CL-22AD, CL33DC, CL3000
 Temperature probe : T-300PC (PC Link software is necessary.)
 K-8-250~800
 K type adapter : K-AD
 Test lead : TL-21M, TLF-120
 Carrying case : C-PC7
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC

High accuracy & multi-function (PC Link)

PC710



True RMS, Dual Display

- 4 digits 9999 count & 3-5/6 digits 6000 count
- Dual Display shows voltage/current and its frequency, and AC components and DC components of voltage/current
- AC True RMS
- EF(Electric Field) Detection to indicate signal strength of electric field which surrounds current-carrying conductors
- Capture (peak hold) 1ms in duration
- MAX, MIN, AVG recording mode
- K type temperature -50°C~1000°C
 - *Optional accessory K-AD is necessary.
 - *K type temp. sensor K-250PC is included as a standard accessory.
- Frequency measurement (AC sine wave only)
- Logic frequency measurement, duty cycle measurement
- Conductance measurement
- Dual display with backlight
- Data hold, Range hold
- Relative value
- Auto power saving mode (30min.) (cancelable)
- Optical Link USB interface (optional)

Display : numeral display 9999 & 6000, bar graph 41 segments

Sampling rate : 5 times/sec., 60 times/sec. for bar graph

Safety : IEC61010-1, IEC61010-31 CAT.III

600V Max./CAT. II 1000V Max.EN61326-1

Battery life : Approx. 60h (manganese battery)

at DCV range



PC710	Measuring range	Best accuracy	Resolution	Input impedance
DCV	60m/600m/9.999/99.99/999.9V	± (0.06%+2)	0.01mV	10MΩ
ACV	60m/600m/9.999/99.99/999.9V	± (0.5%+3)	0.01mV	
DCA	600 μ/6000 μ/60m/600m/6/10A	± (0.2%+4)	0.1 μA	
ACA	600 μ/6000 μ/60m/600m/6/10A	± (0.6%+3)	0.1 μA	
Resistance	600Ω/60k/600k/6M/60MΩ/99.99ns ¹	± (0.1%+3)	0.1 Ω	
Capacitance	60n/600n/6 μ/60 μ/600 μ/6m/25mF±	± (0.8%+3)*2	0.01nF	
Temperature	-50~1000°C (thermocouple K type)	± (0.3%+2)	1°C	
Frequency	15Hz~50kHz	± (0.04%+4)	0.01Hz	
Logic frequency	5Hz~1MHz	± (0.03%+4)	0.001Hz	
Duty cycle	0%~100%	± (3d / kHz+2)	0.01%	
Continuity	Buzzer sounds at between 20 Ω and 300 Ω Open voltage : approx. 1.2V			
Diode test	Open voltage : approx. 3.5V			

Bandwidth	V : 40Hz~3kHz, 3kHz~20kHz(below 99.99V), A : 40Hz~1kHz
Fuse / Battery	11A/1000V IR20kA φ10×38 6F22(9V)×1 0.4A/1000V IR30kA φ6.3×32
Size / Mass	H184×W86×D52mm/430g (including holster)
Standard accessories included	Test Lead (TL-23a), Holster (H-700), Thermocouple K type (K-250PC), Instruction manual

¹1 nS(Conductance): High-value resistance of Giga-Ohms for leakage measurements.

Conductance is the inverse of Resistance, that is S=1/Ω or nS=1/GΩ

*2 Accuracy of film capacitor or equivalent with low leakage.

Optional accessories

Software : PC Link7

Optical PC link cable : KB-USB7

Clamp probe : CL-22AD, CL33DC, CL3000

Temperature probe : T-300PC (PC Link software is necessary.)

K-8-250~800

K type adapter : K-AD

Test lead : TL-21M, TLF-120

Carrying case : C-PC7

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC

Digital Multimeter

PC773



11000 Count

Minimum resolution 0.01mV, 0.01 Ω

- 4-1/2 digits 11000 count
- 0.28% best accuracy
- AC True RMS
- Thermo plastic elastomer, high resistance against drop shock
- Maximum DC/AC 11A can be measured
- Continuity buzzer and LED
- Data hold, Range hold, Relative function
- Auto power off function (30 min.)
- Optical link USB interface (optional)

Display : numeral display 11000

Sampling rate : 4 times / sec.

AC frequency bandwidth : 45~100Hz(110mV range), 45~500Hz(1.1V range), 45~1kHz(11V range and above, ACA)

Safety : IEC61010-1 (EN61010-1) CAT.III 600V Max. / CAT.II1000V Max.



A fuse of large breaking capacity (30kA) is used to further improve the safety.



High accuracy (PC Link)

PC700



Dual Display, Best Accuracy 0.06%

- 4 digits 9999 count & 3-5/6 digits 6000 count
- Maximum DC/AC voltage measurement resolution 0.01mV
- Dual Display shows voltage/current and its frequency, and AC components and DC components of voltage/current
- High speed bar graph
- Frequency measurement (AC sine wave only)
- Logic frequency measurement, duty cycle measurement
- Data hold, Range hold
- Relative value
- Auto power saving mode (30min.) (cancelable)
- Optical Link USB interface (optional)

Display : numeral display 9999 & 6000, bar graph 41 segments


Sampling rate : 5 times/sec., 60 times/sec. for bar graph

Safety : IEC61010-1, IEC61010-31 CAT.III

600V Max./CAT. II 1000V Max.EN61326-1

Battery life : Approx. 60h (manganese battery)

at DCV range

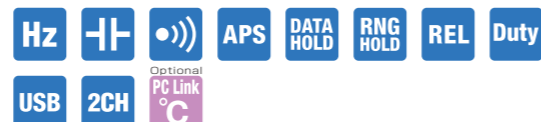

PC700	Measuring range	Best accuracy	Resolution	Input impedance
DCV	60m/600m/9.999/99.99/999.9V	± (0.06%+2)	0.01mV	10MΩ
ACV	60m/600m/9.999/99.99/999.9V	± (0.5%+3)	0.01mV	
DCA	600 μ/6000 μ/60m/600m/6/10A	± (0.2%+4)	0.1 μA	
ACA	600 μ/6000 μ/60m/600m/6/10A	± (0.6%+3)	0.1 μA	
Resistance	600Ω/60k/600k/6M/60MΩ	± (0.1%+3)	0.1 Ω	
Capacitance	60n/600n/6 μ/60 μ/600 μ/6m/25mF±	± (0.8%+3)*	0.01nF	
Frequency	15Hz~50kHz	± (0.04%+4)	0.01Hz	
Logic frequency	5Hz~1MHz	± (0.03%+4)	0.001Hz	
Duty cycle	0%~100%	± (3d / kHz+2)	0.01%	
Continuity	Buzzer sounds at between 20 Ω and 300 Ω Open voltage : approx. 1.2V			
Diode test	Open voltage : approx. 3.5V			

Bandwidth	V : 40Hz~3kHz, 3kHz~20kHz(below 99.99V), A : 40Hz~1kHz
Fuse / Battery	11A/1000V IR20kA φ10×38 6F22(9V)×1 0.4A/1000V IR30kA φ6.3×32
Size / Mass	H184×W86×D52mm/430g (including holster)
Standard accessories included	Test Lead (TL-23a), Holster (H-700), Instruction manual

*Accuracy of film capacitor or equivalent with low leakage.

Optional accessories

Software : PC Link7

Optical PC link cable : KB-USB7

Clamp probe : CL-22AD, CL33DC, CL3000

Temperature probe : T-300PC (PC Link software is necessary.)

K type adapter : K-AD


Test lead : TL-21M, TLF-120

Carrying case : C-PC7

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC

Data processing (PC Link)

PC20

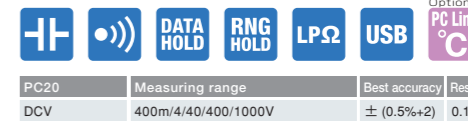

AC adapter connectable for long haul measurement

- 3-3 / 4 digits 4000 count
- 0.5% best accuracy
- Capacitance measurement
 - *Not suitable for measurement of condensers with large leak current.
- Data hold / Range hold
- Safety cover for the 4 · 10A terminal
- Safety cap for AC adapter terminal
- Protective holster with wall hanger and lead holder
- Tilt stand
- Optical link USB interface (optional)

Display : numeral display 4000

Sampling rate : 3 times / sec.



PC20	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/1000V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/750V	± (1.2%+5)	0.001V	ACV: 10M~11MΩ
DCA	400 μ/4000 μ/40m/400m/4A/10A	± (1.5%+2)	0.1 μA	
ACA	400 μ/4000 μ/40m/400m/4A/10A	± (1.8%+5)	0.1 μA	
Resistance	400Ω/4k/40k/400k/4M/40MΩ	± (1.2%+4)	0.1 Ω	
Capacitance	50n/500n/5 μ/50 μ/100 μF	± (5%+6)	0.01nF	
Continuity	Buzzer sounds at between 10 Ω and 120 Ω. Open voltage : approx. 0.4V			
Diode test	Open voltage : approx. 1.5V			

Bandwidth	40Hz~500kHz (below 500V) 40Hz~1kHz (ACA)
Fuse / Battery	0.5A/250V IR1500A φ5×20mm 12.5A/250V IR125A φ6.3×32mm
Size / Mass	H167×W90×D48mm/330g (including holster)
Standard accessories included	Test lead (TL-21a), Holster (H-70), Instruction manual

Optional accessories

Software : PC Link 7 Optical PC link cable : KB-USB20

Clamp probe : CL-22AD, CL33DC, CL3000

Temperature probe : T-300PC (PC Link software is necessary.)

AC adapter : AD-71AC-2 (100V), AD-72AC (220V)

Test lead : TL-21M, TLF-120

Carrying case : C-PC10/S or C-SP

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC

Standard type



CD770

New Standard

- 3-3/4 digits 4000 count
- Easy to read large LCD
- Thermo plastic elastomer, high resistance against drop shock
- Safety cap on current terminal
- Data hold, Range hold, Relative function
- Continuity check, Diode test
- Auto power off function (30min.)

Display : numeral display 4000
Sampling rate : 3 times / sec.
AC frequency bandwidth : 40~400Hz (sine wave)



CD770	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/600V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/600V	± (1.2%+7)	1mV	10M~100MΩ
DCA	400 μ/4000 μ/40m/400mA	± (1.4%+3)	0.1 μA	ACV: 10M~11MΩ
ACA	400 μ/4000 μ/40m/400mA	± (1.8%+5)	0.1 μA	10M~11MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	± (1.2%+5)	0.1 Ω	
Capacitance	50n/500n/5 μ/50 μ/100 μF	± (5%+10)	0.01nF	
Frequency	5/50/500/5k/50k/100kHz	± (0.3%+3)	0.001Hz	
Continuity	Buzzer sounds at between 0Ω and 85Ω (±45Ω). Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 1.5V			
Bandwidth	40~400Hz (sine wave)			
Fuse / Battery	0.5A/250V 1.5kA Φ5×20mm	R6P×2		
Size / Mass	H166×W82×D44mm/340g			
Standard accessories included	Test lead (TL-21a), Instruction manual			

Optional accessories

Clamp probe : CL-22AD, CL33DC, CL3000
 Carrying case : C-77, C-77H
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120

Multifunctional new standard



CD771

Backlight & Cont. buzzer with LED

- 3-3/4 digits 4000 count
- Easy to read large LCD with Backlight
- Large breaking capacity fuse 30kA
- 1.5V battery check function
- Thermo plastic elastomer, high resistance against drop shock
- Safety cap on current terminal
- Data hold, Range hold, Relative function
- Continuity check, Diode test
- Auto power off function (30min.)
- Maximum 20A can be measured if the measurement time is less than 10 seconds. (Take 10 minutes or longer intervals between measurements)

Display : numeral display 4000
Sampling rate : 3 times / sec.
AC frequency bandwidth : 40~400Hz (sine wave)
Safety : IEC61010-1 (EN61010-1) CAT. III 600V Max. / CAT. II DC1000V



CD771	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/1000V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/1000V	± (1.2%+7)	1mV	10M~100MΩ
DCA	400 μ/4000 μ/40m/400mA/10A	± (1.4%+3)	0.1 μA	ACV: 10M~11MΩ
ACA	400 μ/4000 μ/40m/400mA/10A	± (1.8%+5)	0.1 μA	10M~11MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	± (1.2%+5)	0.1 Ω	
Capacitance	50n/500n/5 μ/50 μ/100 μF	± (5%+10)	0.01nF	
Frequency	5/50/500/5k/50k/100kHz	± (0.3%+3)	0.001Hz	
Continuity	Buzzer sounds and LED lights up at between 0Ω and 85Ω (±45Ω). Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 1.5V			
Battery check	Approximate value (30Ω load) 1.5V battery only			
Bandwidth	40~400Hz (sine wave)			
Fuse / Battery	0.5A/1000V 30kA Φ6.35×32mm 10A/1000V 30kA Φ10×38mm	R6P×2		
Size / Mass	H166×W82×D44mm/360g			
Standard accessories included	Test lead (TL-23a), Instruction manual			

Optional accessories

Clamp probe : CL-22AD, CL33DC, CL3000
 HV probe : HV-60
 Carrying case : C-77, C-77H
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120

True RMS new standard



CD772

Backlight & Temperature measurement

- 3-3/4 digits 4000 count
- AC True RMS
- Easy to read large LCD with Backlight
- Large breaking capacity fuse 30kA
- K-type thermocouple temperature measure -20°C~300°C
- Thermo plastic elastomer, high resistance against drop shock
- Safety cap on current terminal
- Data hold, Range hold, Relative function
- Continuity check, Diode test
- Auto power off function (30min.)
- Maximum 20A can be measured if the measurement time is less than 10 seconds. (Take 10 minutes or longer intervals between measurements)

Display : numeral display 4000
Sampling rate : 3 times / sec.
AC frequency bandwidth : 45~500Hz (4V range), 45~1kHz (40V range), 45~1kHz (40V range and above)
Safety : IEC61010-1 (EN61010-1) CAT. III 600V Max. / CAT. II DC1000V



CD772	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/1000V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/1000V	± (1.2%+8)	1mV	10M~100MΩ
DCA	400 μ/4000 μ/40m/400mA/15A	± (1.4%+3)	0.1 μA	ACV: 10M~11MΩ
ACA	400 μ/4000 μ/40m/400mA/15A	± (1.8%+6)	0.1 μA	10M~11MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	± (1.2%+5)	0.1 Ω	
Capacitance	50n/500n/5 μ/50 μ/100 μF	± (5%+10)	0.01nF	
Frequency	5/50/500/5k/50k/100kHz	± (0.3%+3)	0.001Hz	
Temperature	-20°C~300°C	± (3%+30)	0.1°C	
Continuity	Buzzer sounds and LED lights up at between 0Ω and 85Ω (±45Ω). Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 1.5V			
Bandwidth	45~500Hz (4V range), 45~1kHz (40V range and above)			
Fuse / Battery	0.5A/1000V 30kA Φ6.35×32mm 16A/1000V 30kA Φ10×38mm	R6P×2		
Size / Mass	H166×W82×D44mm/360g			
Standard accessories included	Test lead (TL-25a), Thermocouple K type (K-250CD) Instruction manual			

Optional accessories

Clamp probe : CL-22AD, CL33DC, CL3000 HV probe : HV-60
 Temperature probe : K-8-800, K-8-650, K-8-300, K-8-500, K-8-250
 K type adapter : K-AD
 Carrying case : C-77, C-77H
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TLF-120

A fuse of large breaking capacity (30kA) is used to further improve the safety.



Multifunction



CD732

High-speed bar graph & Cont. buzzer with LED

- 6000 count
- Using fire-retarding materials for holster and circuit board
- Wide-range capacitance measurement (0.01nF to 3999 μF)
- Data hold / Range hold
- Safety cap on 6 · 15A terminal
- Protective holster with wall hanger and lead holder
- Auto Power Save (16min.) (cancelable)

Display : numeral display 6000, bar graph 61 segments
Sampling rate : 3 times/sec., 30 times/sec., for bar graph

Safety : EN61010-1, EN61010-2-030, EN61010-2-033
 CAT.III 600V / CAT.II DC1000V · AC750V
 IEC61010-031



CD732	Measuring range	Best accuracy	Resolution	Input impedance
DCV	600m/6/60/600/1000V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	6/60/600/750V	± (1.2%+5)	0.001V	10M~100MΩ
DCA	600 μ/6000 μ/60m/600mA/15A	± (1.5%+3)	0.1 μA	ACV: 10M~11MΩ
ACA	600 μ/6000 μ/60m/600mA/15A	± (1.8%+5)	0.1 μA	10M~11MΩ
Resistance	600/6k/60k/600k/6M/60MΩ	± (1.2%+4)	0.1 Ω	
Capacitance	40n/400n/4 μ/40 μ/400 μF	± (5.0%+6)	0.01nF	
Frequency	9.999/99.999/999.9/9.999k/99.99kHz	± (0.5%+3)		
Duty cycle	20~80%	± (0.5%+5)		
Continuity	Buzzer sounds and LED lights up at between 10~60Ω Open voltage: approx. 0.63V			
Diode test	Open voltage: approx. 2.7V			
Bandwidth	45~500Hz			
Fuse / Battery	0.4A/1000V 30kA Φ6.3×32mm 16A/1000V 30kA Φ10×38mm	R6(1.5V) X 2		
Size / Mass	H167×W90×D48mm/320g (including holster)			
Standard accessories included	Test lead(TL-25a), Holster(H-70), Instruction manual			

Optional accessories

Clamp probe : CL-22AD, CL3000, CL33DC
 HV probe : HV-60
 Carrying case : C-SP
 Clip adapter : CL-14

RD700 RD701

High input impedance 1000MΩ

- 3-3 / 4 digits 4000 count
- 0.3% best accuracy
- AC True RMS ※RD701 only
- Capacitance measurement
 ※Not suitable for measurement of condensers with large leak current.
- K type temperature
 ※Optional accessory K-AD is necessary.
 ※K type temp. sensor K-250PC is included as a standard accessory
- Frequency measurement
 ※Input voltage: 20VACrms and under
 ※Input signal: sign wave or square wave with 40%~70% duty
 ※Input sensitivity: 10kHz~20kHz/0.9Vrms and above
 : 20kHz~500kHz/2.6Vp or 1.9Vrms and above
 : 500kHz~1MHz/4.2Vp or 3Vrms and above
- ADP function (for current sensor)
- Max recording measurement
- Data hold / Range hold
- Relative value
- Auto power off (30min.) (cancelable)
- Alarm for improper test lead insertion to current terminal
- Protective holster with wall hanger and lead holder
- Tilt stand

Display : numeral display 4000 (Hz : 9999, capacitance : 5000)
Sampling rate : 3 times / sec. (Hz : 2 times / sec.)
AC frequency bandwidth : 50~500Hz



RD700 / 701	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/1000V	± (0.3%+4)	0.1mV	10M~1000MΩ
ACV	400m/4/40/400/1000V	± (1.5%+5)	0.1mV	10M~1000MΩ
DCA	400 μ/4000 μ/40m/400mA/10A	± (1.2%+3)	0.1 μA	
ACA	400 μ/4000 μ/40m/400mA/10A	± (1.5%+4)	0.1 μA	
Resistance	400/4k/40k/400k/4M/40MΩ	± (0.6%+4)	0.1 Ω	
Capacitance	500n/5 μ/50 μ/500 μ/3000 μF	± (2.5%+6)	0.1nF	
Temperature	-20°C~300°C	± (2%+3)	1°C	
Frequency	50Hz~1MHz	± (0.5%+4)	0.01Hz	
Continuity	Buzzer sounds at between 20Ω and 120Ω. Open voltage: approx. 0.4V			
Diode Test	Open voltage: approx. 1.6V			
Bandwidth	50~500Hz			
Fuse / Battery	12.5A/500V IR20kA Φ6.3×32mm 0.63A/500V IR200kA Φ6.3×32mm	6LF22 (9V)×1		
Size / Mass	H179×W87×D55mm/460g (including holster)			
Standard accessories included	Test Lead (TL-23a), Thermocouple K type (K-250PC), Holster (H-50), Instruction manual			

Optional accessories

Clamp probe : CL-22AD, CL33DC, CL3000
 HV probe : HV-60
 Temperature probe : K-8-800, K-8-650, K-8-300, K-8-500, K-8-250
 K type adapter : K-AD
 Test lead : TL-21M, TLF-120
 Carrying case : C-CD
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC

ALL-IN-ONE DMM



CE

CD800b

True RMS, Portable DMM

- 6000 count
- AC True RMS
- Data hold / Range hold
- Relative value measurement
- MAX/MIN value recording mode
- LCD with backlight
- Auto power save (15min.) (cancelable)
- Attachment body cover for protection

Display : numeral display 6000
Sampling rate : 5 times/sec.
Safety : IEC61010 CAT.IV 300V / CAT.III 600V



CD800b	Measuring range	Best accuracy	Resolution	Input impedance
DCV	600m/6/60/600V	±(0.8%+3)	0.1mV	10MΩ
ACV	6/60/600V	±(1.2%+5)	0.001V	
DCA	60m/600mA	±(1.2%+5)	0.01mA	1Ω
ACA	60m/600mA	±(1.6%+5)	0.01mA	
Resistance	600/6k/60k/600k/6M/60MΩ	±(1.2%+5)	0.1Ω	
Capacitance	60n/600n/6μ/60μ/600μF	±(3.0%+10)	0.01nF	
Frequency	99.99/999.9/9.999k/99.99kHz	±(0.5%+3)	0.01Hz	
Continuity	Buzzer sounds between 10~50Ω	Open voltage : approx. 1.0V		
Diode test	Open voltage : approx. 3.2V			
Bandwidth	45~500Hz (ACV), 45~1kHz (ACA)			
Fuse / Battery	600mA/600V 10kA φ6.3X32mm LR03(1.5V) X 2			
Size / Mass	H166XW100XD43mm/360g			
Standard accessories included	Hand strap, Instruction manual			

Optional accessories

Clip adapter: CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Hanger magnet: HM-1



CE

CD800F

True RMS, CAT.IV DMM

- 6000 count
- AC True RMS
- Data hold / Range hold
- Relative value measurement
- MAX/MIN value recording mode
- LCD with backlight
- Auto power save (15min.) (cancelable)
- Attachment body cover for protection
- EF (Electric Field) detection

Display : numeral display 6000
Sampling rate : 5 times/sec.
Safety : IEC61010 CAT.IV 1000V



CD800F	Measuring range	Best accuracy	Resolution	Input impedance
DCV	600m/6/60/600/1000V	±(0.8%+3)	0.1mV	10MΩ
ACV	6/60/600/1000V	±(1.2%+5)	0.001V	
Resistance	600/6k/60k/600k/6M/60MΩ	±(1.2%+5)	0.1Ω	
Capacitance	60n/600n/6μ/60μ/600μF	±(3.0%+10)	0.01nF	
Frequency	99.99/999.9/9.999k/99.99kHz	±(0.5%+3)	0.01Hz	
Continuity	Buzzer sounds between 10~50Ω	Open voltage : approx. 1.0V		
Diode test	Open voltage : approx. 3.2V			
Electric field	At the standard sensing voltage of about 60V or more, sensing the bar graph and intermittent sound vary in 5 steps			
Bandwidth	45~500Hz			
Battery	LR03(1.5V) X 2			
Size / Mass	H166XW100XD43mm/360g			
Standard accessories included	Hand strap, Instruction manual			

Optional accessories

Clip adapter: CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Hanger magnet: HM-1

Volt Meter



CE

KP1

CAT.IV Volt tester

- AC True RMS
- Self test - checking failures of LCD, disconnection of a lead wire
- EF (Electric Field) detection
- LCD with backlight & LED light for dark place
- Auto data hold
- Auto power off (1min.)

Display : numeral display 9999
Sampling rate : 6 times / sec. (ACV), 5 times / sec. (DCV)
Safety : IEC61010-1, IEC61010-2-030 CAT.IV600V / CAT.III1000V, IEC61010-2-33, IEC61010-31



KP1	Measuring range	Best accuracy	Resolution
DCV	5~999.9V	±(0.7%+5)	0.1V
ACV	5~999.9V	±(1.7%+5)	0.1V
Continuity	Buzzer sounds at between 20kΩ and 500kΩ	Open voltage: approx. 0.6V	
EF Detection	A voltage or electric field of about 60V or more is detected. The bar graph and intermittent buzzer beeps change in five steps		

Bandwidth	45~400Hz
Battery	LR03 X 2
Size / Mass	H130XW90XD30mm/approx. 205g
Standard accessories included	Test leads (TL-35 : Test probe (red), TL-36 : Test lead (black), TL-A01 : Test probe (black), Instruction manual

Optional accessories

Test lead : TL-26, TL-37
 Clip adapter : CL-26, TL-A18a
 Carrying case : C-DG3a

Hybrid Digital Multimeter

Multimeter + Clamp meter



CE

PM33a

Hybrid pocket size DMM + Clamp meter

- Lightweight approx. 160g
- Maximum / Minimum value hold
- Current measurement with thin U-shaped current sensor(7mm) at angles of 0 and 180 degrees
- AC and DC currents measurable up to 100A
- Data hold
- Measurement of relative value
- Auto power off

Safety : IEC61010-1 CAT.II 600V, CAT.III 300V




PM33a	Measuring range	Best accuracy	Resolution
DCV	660m / 6.6 / 66 / 600V	±(0.7%+3)	0.1mV
ACV	660m / 6.6 / 66 / 600V	±(1.4%+6)	0.1mV
DCA	100A	±(2.0%+5)	0.1A
ACA	100A	±(2.0%+5)	0.1A
Resistance	660 / 6.6k / 66k / 660k / 6.6M / 66MΩ	±(0.9%+3)	0.1Ω
Capacitance	6.6n / 66n / 660n / 6.6μ / 66μ / 660μ / 6.6m / 66mF	±(5.0%+10)	0.001nF
Frequency	660 / 6.6k / 66kHz	±(0.5%+3)	0.1Hz
Duty cycle	20%~80%	±(0.5%+5)	
Continuity	Buzzer sounds at below 30Ω . Open voltage : approx. 1.2V		
Diode test	Open voltage : approx. 3V		


Battery	LR03 x 2
Size / Mass	H130XW75XD19.9mm / approx160g (including Battery)
Clamp diameter	φ 10mm
Standard accessories included	Instruction manual

Optional accessories


Carrying case : C-DG3a
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC




AC current measurement



Cables in a narrow space can be clamped for current measurement



DC current measurement



Easy to put in a shirt pocket

Pocket type



PM300

True RMS, Pocket size DMM

- 6000 count
- AC True RMS
- Data hold
- Relative value measurement
- MAX/MIN value recording mode
- Auto power save (15min.) (cancelable)
- Stylish carrying case provided as standard accessory

Display : numeral display 6000
 Sampling rate : 5 times/sec.
 Safety : IEC61010 CAT.IV 300V / CAT.III 600V



PM3

8.5mm thick body with multi-function

- 3-3 / 4 digits 4000 count
- 0.7% best accuracy
- Capacitance measurement
*Not suitable for measurement of condensers with large leak current.
- Frequency measurement (AC sine wave only)
- Duty cycle
- Data hold
- Relative value
- Auto power off (15min.) (cancelable)

Display : numeral display 4000
 Sampling rate : 3 times / sec.
 AC frequency bandwidth : 40~400Hz
 Safety : IEC61010-1 CAT.II DC AC500V Max.



PM11

Tough but compact DMM

- 3-3 / 4 digits 4000 count
- 0.8% best accuracy
- Analog bar graph
- Compact storage of test leads
- Test lead can be snapped into a fixed position atop the case.

Display : numeral display 4000, bar graph 40 segments
 Sampling rate : 1.3 times / sec., 13 times / sec.
for bar graph
 AC frequency bandwidth : 45~1kHz
 Safety : IEC61010-1 CAT.III 300V Max. / CAT.II 500V Max.



PM300	Measuring range	Best accuracy	Resolution	Input impedance
DCV	600m/6/60/600V	±(0.8%+3)	0.1mV	10MΩ
ACV	6/60/600V	±(1.2%+5)	0.001V	
Resistance	600/6k/60k/600k/6M/60MΩ	±(1.5%+5)	0.1Ω	
Capacitance	60n/600n/6μ/60μ/600μF	±(3.0%+10)	0.01nF	
Frequency	99.99/999.9/9.999k/99.99kHz	±(0.5%+3)	0.01Hz	
Continuity	Buzzer sounds between 10~50Ω	Open voltage : approx. 1.0V		
Diode test	Open voltage : approx. 3.2V			
Bandwidth	45~500Hz			
Battery	Coin type lithium battery CR2032 (3V) X 1			
Size / Mass	H110XW56XD13mm/84g H121XW63XD28mm/135g (when stored in case)			
Standard accessories included	Carrying case (C-PM300), Instruction manual			

Optional accessories

Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-91C



PM3	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/500V	±(0.7%+3)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/500V	±(2.3%+5)	0.001V	10M~100MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	±(2.0%+5)	0.1Ω	ACV: 10M~100MΩ
Capacitance	5n/50n/500n/5μ/50μ/200μF	±(5.0%+10)	0.001nF	10M~100MΩ
Frequency	9.999/99.99/999.9/9.99k/60.00kHz	±(0.7%+5)	0.001Hz	11MΩ
Duty Cycle	0.1~99%			
Continuity	Buzzer sounds at less than 10~120Ω	Open voltage : approx. 0.4V		
Diode Test	Open voltage : approx. 1.5V			
Bandwidth	40~400Hz			
Battery	Coin type lithium battery CR2032 (3V) X 1			
Size / Mass	H108XW56XD11.5mm/approx. 85g			
Standard accessories included	Case holder (C-PM3), Instruction manual			

Optional accessories

Clip adapter : CL-13a, CL-15a



PM11	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/500V	±(0.8%+4)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/500V	±(2.3%+8)	0.001V	ACV: 10M~100MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	±(2.0%+4)	0.1Ω	10M~100MΩ
Continuity	Buzzer sounds at less than 35Ω	Open voltage : approx. 1.2V		
Diode test	Open voltage : approx. 3V			
Bandwidth	45~1kHz			
Battery	Button battery LR-44X2			
Size / Mass	H117XW76XD18mm/approx. 117g			
Standard accessories included	Instruction manual			

Optional accessories

Clip adapter : CL-15a, CL-DG3a

Pocket type



PM7a

Updated longtime seller

- 3-3 / 4 digits 4000 count
- 0.7% best accuracy
- Range hold
- Auto power off (15min.)
- Low power ohm (input voltage 0.4V) at continuity range
- Power saving design

Display : numeral display 4000
 Sampling rate : 3 times / sec.
 AC frequency bandwidth : 40~400Hz



PS8a

Solar charge battery DMM

- 3-3 / 4 digits 4000 count
- 0.7% best accuracy
- Range hold
- Auto power off (15min.)
- Low power ohm (input voltage 0.4V) at continuity range
- Power saving design

Display : numeral display 4000
 Sampling rate : 3 times / sec.
 AC frequency bandwidth : 40~400Hz



PM7a	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/500V	±(0.7%+3)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/500V	±(2.3%+5)	0.001V	ACV: 10M~100MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	±(2.0%+5)	0.1Ω	ACV: 10M~11MΩ
Continuity	Buzzer sounds at less than 10~120Ω	Open voltage : 0.4V		
Diode test	Open voltage : approx. 1.5V			
Bandwidth	40~400Hz			
Battery	Button battery LR-44X2			
Size / Mass	H115XW57XD18mm/approx. 85g			
Standard accessories included	Instruction manual			

Optional accessories

Clip adapter : CL-14, CL-15a



PS8a	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/500V	±(0.7%+3)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/500V	±(2.3%+5)	0.001V	ACV: 10M~100MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	±(2.0%+5)	0.1Ω	ACV: 10M~11MΩ
Continuity	Buzzer sounds at less than 10~120Ω	Open voltage : 0.4V		
Diode test	Open voltage : approx. 1.5V			
Bandwidth	40~400Hz			
Battery	Amorphous solar battery + manganese dioxide lithium secondary battery			
Size / Mass	H115XW57XD18mm/approx. 85g			
Standard accessories included	Instruction manual			

Optional accessories

Clip adapter : CL-14, CL-15a

Analog Multimeters (circuit testers)

What is Analog Multimeter?

Analog multimeters basically make measurements of DC voltage, AC voltage, DC current and resistance. Except some special products, they have no function to measure the AC current. Characteristics of recent analog multimeters include the extended measuring range function (particularly for fine voltage and current) with an amplifier installed, the function to allow the measurement of capacitor capacity, and the zero-center meter function. To enhance operability and usability, some products include the auto range function, automatic polarity switching function, and a structure integrating a case to allow the storage of a test lead. There are some testers that allow the measurement of hFE (DC current amplification factor) of a transistor and temperature measurement using a temperature sensor, which is offered as an optional accessory.

Advantages of analog multimeters

1. Easy to read the mean value of values changing in short cycles.
* A digital tester does not give stable value determination.
2. No need for the operating power supply except for resistance range (excluding Model EM7000 integrating an amplifier, and CX506a integrating an oscillator) and zero-center function.
3. Suited for judgment based by intuition (in continuity test etc.).

Four key points in choosing a suitable model

1. What are the necessary measuring functions?

Choose the necessary measuring functions in addition to voltage and resistance.

- Need for the measurement of current (0.25A, 0.3A, 30A), DC only.
- Measurements for remaining dry battery capacity, capacitor, and frequency.
- Measurement of DC high voltage with the use of an optional accessory.

2. Other necessary functions

- 1) The needle occasionally swings to the opposite direction in DC voltage measurement.
→ Check the polarity by the zero-center meter function.
- 2) Hard to check for continuity.
→ Use an LED light-up type in noisy places
→ Use a buzzer type to verify with sounds.

3. Graduation of scale

There are two general types of graduation of the measuring range:

- ① 2.5, 5, 10, 50, 250, 500V
- ② 3, 12, 30, 120, 600V

For measurement of a car battery (24V), measurement in the 30V range of ② is suitable. Choose a type suitable for your intended application.

4. Other functions

Other types are furnished with an auto range function allowing the automatic optimal setting of voltage and resistance. There are also types integrating a transistor transmitter and others integrating a current-limiting fuse with breaking capacity of 100kA for enhanced safe operation.

Basic measuring method

Check the range before making a measurement

Most problems with a tester are caused by overcurrent and drop of the tester. Failures due to overcurrent are most frequently caused by voltage applied to a current range and resistance range with lower internal resistance (thereby causing overcurrent of tens to hundreds times to run through the circuit). Although some testers include a meter protector and a circuit protector using a diode, it is recommended to check the range before measuring.


For measuring unknown values

In measuring unknown current and voltage values, find an approximate value at the maximum range first and then make adjustments to the optimum range (1000V to 250V range in case of voltage measurement). This method prevents a failure caused by incorrect range adjustment.


* Do not change the range during measurement.

Examples

AC100V plug outlet

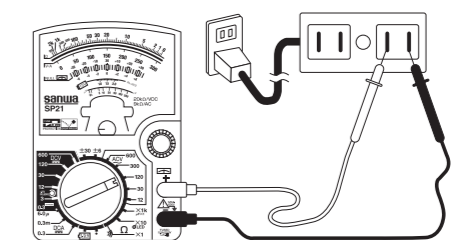

Battery voltage

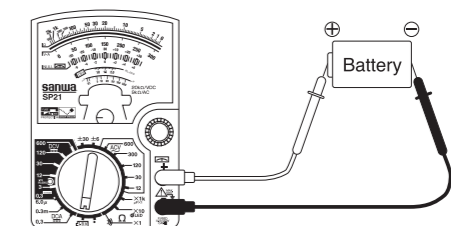

FET Tester



EM7000

High sensitivity for measurement of lower capacitance

- High input impedance (DCV2.5~12M Ω /V), and 0.12 μ A range (DCA)
- Bandwidth 40Hz~1MHz AC sign wave
- Rectangular pulse P-P (Peak to Peak) measurement (duty cycle 20% and above)
- Wide ohm range 0.2 Ω ~200M Ω

Bandwidth : 40Hz~1MHz (12V range and below)

Optional accessories

HV probe : HV-60
 Carrying case : C-CA
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120



EM7000	Measuring range	Accuracy
DCV	0.3/1.2/3/12/30/120/300/1000V	$\pm 3\%$ of full scale
\pm DCV	$\pm 0.15/0.6/1.5/6/15/60/150/600V$	$\pm 7\%$ of full scale
ACV rms (50 / 60Hz)	3V (approx. 2.5M Ω)/12V (approx. 1.1M Ω) 30V (approx. 800k Ω)/120/300V (approx. 800k Ω)/ 750V (approx. 10M Ω)	$\pm 3\%$ of full scale
ACV P-P	Sine wave: 8.4V (approx. 2.5M Ω /V) 33V (approx. 1.1M Ω /V) 84V (approx. 800M Ω /V) 330/840V (approx. 800k Ω /V)	$\pm 5\%$ of full scale
	Square symmetric wave: 8.4V (2.5M Ω /V)	$\pm 6\%$ of full scale
	Triangular symmetric wave: 8.4V (2.5M Ω /V)	$\pm 6\%$ of full scale
DCA	0.12 μ A / 0.3m/3m/30m/300m/6A	$\pm 3\%$ of full scale
DCA (NULL)	$\pm 0.06 \mu$ A / $\pm 0.15m/1.5m/15m/150mA$	$\pm 7\%$ of full scale
ACA	6A	$\pm 3\%$ of full scale
Resistance	2k/20k/200k/2M/20M/200M Ω	$\pm 3\%$ of arc
dB	-10~+51dB	$\pm 3\%$ of arc
Bandwidth	40Hz~1MHz (below 12V range)	
Battery	R6P 1.5V \times 2, 6F22 9V \times 1	
Fuse	ϕ 5.0 \times 20mm ceramic (250V / 0.5A) ϕ 5.0 \times 20mm ceramic (250V / 6.3A)	
Size / Mass	H165 \times W106 \times D46mm / approx. 375g	
Standard accessories included	Test lead (TL-21a), Spare fuse, Instruction manual	

The value in () at DCV and ACV is input resistance.

Multifunctional model



SH-88TR

Zero center meter (NULL)

- Total 35 wide ranges (22ch sw + additional functions)
- Capacitance measurement 1 μ F~1F
- LED for continuity check

Optional accessories

HV probe : HV-10
 Carrying case : C-Y5
 Clip adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
 hFE probe : HFE-6T
 Test lead : TL-91M



SH-88TR	Measuring range	Accuracy
DCV (NULL)	0.12/3/12/30/120/300/1200V (20k Ω /V)	$\pm 2.5\%$ of full scale
ACV	$\pm 6/15/60/150/600V$ (40k Ω /V)	$\pm 5\%$ of full scale
	3/12/30/120/300/1200V (9k Ω /V)	$\pm 3\%$ of full scale (3V : $\pm 5\%$)
DCA	50 μ A / 3m/30m/0.3A	$\pm 2.5\%$ of full scale
Resistance	3k/30k/300k/3M/30M Ω	$\pm 3\%$ of arc
dB	-10~+63dB	$\pm 3\%$ of full scale (3V : $\pm 5\%$)
Capacitance	1000 μ F/0.01/0.1/F	
Continuity	LED : emitting light at 10 Ω or less. Open voltage : 3V	
hFE	1000 at X10 range (optional probe "HFE-6T" is necessary)	—
Bandwidth	40~20kHz (less than 30V : $\pm 3\%$) 30~100kHz (less than 30V : $\pm 1dB$)	
Battery	R6P \times 2, 6F22 \times 1	
Fuse	ϕ 5.2 \times 20mm (250V/0.5A)	
Size / Mass	H150 \times W100 \times D36mm/ approx. 280g	
Standard accessories included	Test lead (TL-61), Instruction manual	

The value in () at DCV and ACV is input resistance.

Multifunctional model



CX506a

Capacitor & Transistor checker (built-in-oscillator)

- 26ch switch, wide range measurement
- Capacitance measurement 50pF~2000 μ F
- High input impedance 50k Ω / V (DC3~300Vrange)
- Switchable DC polarity

Bandwidth : 40Hz~30kHz (3V and 12V), 40Hz~10kHz (30V range)

Optional accessories

HV probe : HV-60
 Carrying case : C-CA
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120



CX506a	Measuring range	Accuracy
DCV	120m (4k Ω)/3/12/30/120 300 (50k Ω /V)/1000V (15k Ω)	120m : $\pm 4\%$ $\pm 2.5\%$ of full scale
ACV	3/12/30/120/300/750V (8k Ω /V)	$\pm 3\%$ of full scale (3/12V : $\pm 4\%$)
DCA	30 μ A / 0.3m/3m/30m/0.3A	$\pm 2.5\%$ of full scale (30 μ A / 0.3m : $\pm 3\%$)
Resistance	5k/50k/500k/5M/50M Ω	$\pm 3\%$ of arc
Capacitance	C1 : 50p~0.2 μ F C2 : 0.01 μ ~20 μ F C3 : 1~2000 μ F	C1/C2 : $\pm 6\%$ of arc
hFE (DC Current Amplification Factor)	Transistor hFE: 0~1000	—
Bandwidth	40~30kHz (12V: 40Hz~30kHz 30V~ : 40Hz~10kHz)	
Battery	R6P \times 2, 6F22 \times 1	
Fuse	ϕ 5.0 \times 20mm (250V/0.5A) arc-extinguishing material in ceramic tube	
Size / Mass	H165 \times W106 \times D46mm/ approx. 370g	
Standard accessories included	Test lead (TL-21a), Clip lead (CL-506a) Instruction manual, Spare fuse	

The value in () at DCV and ACV is input resistance.

Drop shock proof meter



YX360TRF

Best seller drop shock proof meter

- Drop shock proof meter
- Null (zero center) meter $\pm 5 / \pm 25$ in DCV
- High resistance up to 200M Ω with low voltage
- Protective body cover
- Capacitance, dB, Li measurement

Bandwidth : 30~100kHz (AC10V)

Optional accessories

hFE probe : HFE-6T
 Clip adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
 High voltage probe : HV-10T




YX360TRF	Measuring range	Accuracy
DCV (NULL)	0.1V (20k Ω / V)	$\pm 5\%$ of full scale
	0.25 / 2.5 / 10 / 50 (20k Ω / V) / 250 / 1000V(9k Ω / V)	$\pm 3\%$ of full scale
	$\pm 5 / 25V$ (40k Ω / V)	$\pm 5\%$ of full scale
ACV	10 / 50 / 250 / 750V (9k Ω / V)	$\pm 4\%$ of full scale
DCA	50 μ A / 2.5m / 25m / 0.25A	$\pm 5\%$ of full scale
Resistance	2k / 20k / 200k / 2M Ω (X1 / X10 / X100 / X1k) 200M Ω (X100k)	$\pm 3\%$ of arc
Load current (LI)	0~150m / 15m / 1.5m / 150 μ A / 1.5 μ A	
Capacitance	10 μ F	*2
dB	-10dB~+22dB (for 10VAC) ~+62dB	—
DC high voltage	DC25kV (optional probe "HV-10T" is necessary)	—
hFE	1000 at X10 range (optional probe "HFE-6T" is necessary)	—
Battery	R6 (IEC) or UM-3(1.5V) \times 2	
Fuse	ϕ 5.2 \times 20mm (250V / 0.5A)	
Size / Mass	H159.5 \times W129 \times D41.5mm / approx. 320g	
Standard accessories included	Instruction manual, Hand strap	

The value in bracket at DCV and ACV is input resistance.

*1 Not including the resistance of fuse.

*2 Pointer indication of the maximum move by charged current in the capacitor.



YX-361TR

Wide measurement range

- Total 35 wide ranges (24ch sw + additional functions)
- \pm DCV zero center meter
- LED for continuity check
- OUTPUT terminal (series capacitor terminal)
- Battery check

Optional accessories

HV probe : HV-10
 Carrying case : C-Y5
 Clip adapter : CL-15a, CL-14, CL-DG3a, TL-9IC
 hFE probe : HFE-6T
 Test lead : TL-91M



YX-361TR	Measuring range	Accuracy
DCV (NULL)	0.1/0.5/2.5/10/50/250/1000V (20k Ω /V)	$\pm 2.5\%$ of full scale
ACV	$\pm 5/25V$ (40k Ω /V)	$\pm 5\%$ of full scale
	2.5/10/50/250/1000V (9k Ω /V)	$\pm 3\%$ of full scale (2.5/10V : $\pm 4\%$)
DCA	50 μ A / 2.5m/25m/0.25A	$\pm 2.5\%$ of full scale
Resistance	2k/20k/200k/2M/20M Ω	$\pm 3\%$ of arc
dB	-10~+62dB	$\pm 3\%$ of full scale (2.5/10V : $\pm 4\%$)
Continuity	LED : emitting light at 10 Ω or less. Open voltage : 3V	
Battery check	1.5V	
hFE	1000 at X10 range (optional probe "HFE-6T" is necessary)	—
Bandwidth	40~20kHz (less than 50V : $\pm 3\%$)	
Battery	R6P \times 2, 6F22 \times 1	
Fuse	ϕ 5.2 \times 20mm (250V / 0.5A)	
Size / Mass	H150 \times W100 \times D37mm / approx. 290g	
Standard accessories included	Test lead (TL-61), Instruction manual	

The value in () at DCV and ACV is input resistance.

SP21

Continuity check buzzer

- Drop shock proof taut-band meter
- \pm DCV zero center meter
- Fuse and diode protection
- Battery check
- Tilt stand

Bandwidth : 40~100kHz (AC12V)

Optional accessories

HV probe : HV-20
 Carrying case : C-SPH or C-SP
 Clip adapter : CL-13a, CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-21M, TLF-120



SP21	Measuring range	Accuracy
DCV (NULL)	0.3 (5k Ω)/3/12/30/120/600V (20k Ω /V)	$\pm 3\%$ of full scale
ACV	$\pm 6/30V$ (20k Ω /V)	$\pm 5\%$ of full scale
	12/30/120/300/600V	$\pm 3\%$ of full scale
DCA	60 μ A / 30m/0.3A	$\pm 3\%$ of full scale
Resistance	2k/20k/2M Ω	$\pm 3\%$ of arc
Capacitance	500 μ F	*1
Continuity	Buzzer sounds at less than approx. 10 Ω . Open voltage : 3V	
Bandwidth	40~100kHz (AC12V)	
Battery	R6P \times 2	
Fuse	ϕ 5 \times 20mm (250V/0.5A)	
Size / Mass	H144 \times W99 \times D41mm/ approx. 270g	
Standard accessories included	Test lead (TL-21a), Instruction manual	

The value in () at DCV and ACV is input resistance.

*1 Pointer indication of the maximum move by charged current in the capacitor.



Drop shock proof meter



SP20

DC high voltage & temperature measurable

- 20ch measurement ranges
- Capacitance measurement 500 μ F
- Tilt stand
- DC high voltage and temperature measurement (with optional accessories)

Bandwidth : 40~100kHz (AC10V)

Optional accessories

HV probe : HV-10
 Temperature probe : T-THP
 Carrying case : C-SPH or C-SP
 Clip adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-91M, TLF-120



SP20	Measuring range	Accuracy
DCV	0.25/2.5/10/50/100V (20k Ω /V)/500V (9k Ω /V)	\pm 3% of full scale
ACV	10/50/250/500V (9k Ω /V)	\pm 3% of full scale
DCA	50 μ /2.5m/25m/0.25A	\pm 3% of full scale
Resistance	2k/20k/200k/2M Ω	\pm 3% of arc
Capacitance	500 μ F	*1
DC high voltage	DC25kV (Optional probe "HV-10" is necessary)	—
Temperature	-20 ~ +200 $^{\circ}$ C (Optional probe "T-THP" is necessary)	\pm 3% (T-THP)
Bandwidth	40~100kHz (AC10V)	
Battery	R6P \times 2	
Fuse	ϕ 6.3 \times 30mm (250V/0.5A)	
Size / Mass	H144 \times W99 \times D41mm/approx. 270g	
Standard accessories included	Test lead (TL-61), Instruction manual	

The value in () at DCV and ACV is input resistance.

*1 Pointer indication of the maximum move by charged current in the capacitor.

Slim compact AMT



CP-7D

23mm thick small size

- Wide scale panel with mirror
- Affixed test leads providing better safety
- High-precision, non-flammable, smokeless metal-oxide film resistor
- Battery check
- Fuse and diode circuit protection

Bandwidth : 30~100kHz (AC10V),
30~20kHz (AC50V)

Optional accessories

Carrying case : C-CP
 Clip adapter : CL-14, CL-15a, CL-DG3a, TL-9IC



CP-7D	Measuring range	Accuracy
DCV	0.25/2.5/10/50/250/500V (4k Ω /V)	\pm 3% of full scale
ACV	10/50/250/500V (4k Ω /V)	\pm 4% of full scale
DCA	0.25m/25m/500mA	\pm 3% of full scale
Resistance	2k/20k/1M Ω	\pm 3% arc
Load current (LI)	0~74mA/7.4mA/150 μ A	—
Battery check	0.9~1.5V	—
dB	-20~36dB	—
Bandwidth	30~100kHz (AC10V) 30~20kHz (AC50V)	
Battery	R6P \times 1	
Fuse	ϕ 5.2 \times 20mm (250V/0.5A)	
Size / Mass	H119 \times W85 \times D23mm/approx. 140g	
Standard accessories included	Test lead (TL-84), Instruction manual	

The value in () at DCV and ACV is input resistance.



SP-18D

Protective body cover

- Low power ohm (3V) measurement up to 200M Ω
- Capacitance measurement 0.01 μ F~1000 μ F
- LED check by 3V terminal voltage at resistance range
- Battery check
- Protective body cover

Bandwidth : 30~80kHz (AC12V), 30~20kHz (AC30V)

Optional accessories

Clip adapter : CL-14, CL-15a, CL-DG3a, TL-9IC



SP-18D	Measuring range	Accuracy
DCV	0.3/3/12/30/120/600V (20k Ω /V)	\pm 3% of full scale
ACV	12/30/120/300/600V (9k Ω /V)	\pm 3% of full scale
DCA	60 μ /30m/0.3A	\pm 3% of full scale
Resistance	2k/20k/2M/200M Ω	\pm 3% of arc
Battery check	1.5V/1.5V Coin battery	—
Capacitance	1000 μ F	*1
Bandwidth	30~70kHz (AC 12V) 30~20kHz (AC 30V)	
Battery	R6P \times 2	
Fuse	ϕ 5.2 \times 20mm (250V/0.5A)	
Size / Mass	H159.5 \times W129 \times D41.5mm / approx. 320g	
Standard accessories included	Instruction manual	

The value in () at DCV and ACV is input resistance.

*1 Pointer indication of the maximum move by charged current in the capacitor.



AP33

Small pocket size

- Elastomer material absorbs shock from fall
- High-durability nylon-woven copper lead
- Using elastomer material improves flexibility and reduces the stress on the lead wire and the probe when bent.

Bandwidth : 40~10kHz (50V and below)



AP33	Measuring range	Accuracy
DCV	10/50/250/500V (2k Ω /V)	\pm 5% of full scale
ACV	50/250/500V (2k Ω /V)	\pm 5% of full scale
Battery check	1.5V/9V	—
DCA	25m/250mA	\pm 5% of full scale
Resistance	5k/500k Ω	\pm 3% arc
Bandwidth	40~10kHz (less than 50V)	
Battery	R03 \times 1	
Fuse	ϕ 5 \times 20mm (250V/0.5A)	
Size / Mass	H126 \times W87 \times D30mm/approx. 185g	
Standard accessories included	Instruction manual	

The value in () at DCV and ACV is input resistance.



TA55

30A range for automotive

- High level panel visibility
- Continuity check buzzer
- Tilt-stand
- Measurable up to DC30A / DC300A with optional clamp probe

Bandwidth : 40~5kHz

Optional accessories

Clamp probe : CL33DC
 Carrying case : C-SPH or C-SP
 Clip adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
 Test lead : TL-91M, TLF-120



TA55	Measuring range	Accuracy
DCV	0.3/3/16/30/60V (20k Ω /V)	\pm 3% of full scale
ACV	30/120/300V (9k Ω /V)	\pm 4% of full scale
DCA	0.5/3/30A	\pm 5% of full scale
Resistance	2k/20k/200k/2M Ω	\pm 3% of arc
Continuity	Buzzer sounds at less than approx. 70 Ω . Open voltage : 3V	
Bandwidth	40~5kHz	
Battery	R6P \times 2	
Fuse	ϕ 6.3 \times 30mm (250V/3A)	
Size / Mass	H142 \times W97 \times D38mm/approx. 300g	
Standard accessories included	Test lead (TL-91), Instruction manual	

The value in () at DCV and ACV is input resistance.

For power line



VS-100 (with case)

Current-limiting fuse, 100kA breaking capacity, is installed.

- For lower voltage circuit (500V and below) with large capacitance
- Current-limiting fuse that can interrupt 100kA, is installed.
- All ranges are protected from input voltage up to 500V
- Carrying case

Bandwidth : 40~10kHz (50V and below)



VS-100	Measuring range	Accuracy
DCV	10/50/250/500V (4k Ω /V)	\pm 3% of full scale
ACV	10/50/250/500V (4k Ω /V)	\pm 3% of full scale
Resistance	2k/20k/2M Ω	\pm 3% arc
Bandwidth	40~10kHz (less than AC50V)	
Battery	R6P \times 2	
Fuse	Current-limiting fuse 600V/3A, Breaking capacity 100kA Glass-tube fuse ϕ 6.3 \times 30mm 0.25A/250V, Breaking capacity 100A	
Size / Mass	H144 \times W96 \times D56mm/approx. 395g	
Standard accessories included	Test lead (TL-100-0M), Carrying case (C-VS), Instruction manual	

The value in () at DCV and ACV is input resistance.

Lux Meters

Various environments need appropriate illumination, whether it be ordinary homes, offices, or factories. Inadequate illumination or too much illumination can lead to false recognition, reduced work efficiency, and loss of vision caused by fatigue. Since appropriate illumination helps to improve work efficiency and assure work safety, the control

of illumination is regarded as a very important element. The illuminance meter indicates, by values in the unit of LUX, how much light shines on each place. It is used for the purpose of assuring appropriate illumination suitable for every environment. JIS (Japanese Industrial Standards) has a standard given below as recommended values for each environment.

Type	LUX	1500	700	300	150	70	30	15	-LUX-
Housing		* Sewing (Dark material)	* Studying, Sewing * Reading (Long time or small letters)	* Reading * Makeup * Eating meal	Living room, child room, reception room, dining room, kitchen	Hall, stairway, corridor, escape stairway, garage			
School		* Precision drawing * Machine-sewing * Precision experiment	Drafting room * Blackboard * Sewing * Library reading room * Precision machining	Ordinary classroom, special classroom, library reading room	Auditorium, meeting room, hallway, stairway	Escape stairway			
Office		* Designing * Drawing * Typing * Calculation * Key-punching	Office, drafting room, gage board, telephone exchange room, distribution board	Executive room, conference room, reception room, hall, elevator	Work room, change room, stairway, warehouse	Escape stairway			
Road, park					Tunnel of expressway (Illumination at the entrance and exit should be higher than this value.)	70~15 Tunnel	15~3 Road with busy traffic	1.5~0.3 Road with scarce traffic, road in residential areas, park, other open spaces	
Hospital	Surgical table 10,000 over	* Autopsy * First-aid treatment * Drug formulation	Surgical room, first-aid station, ocular inspection, drug preparation * Technological research * Injection	Clinic, examination room, dispensary, waiting room, medical office	Doctor's room, hospital room, X-ray room, medicine room				
Theater, movie theater				* Ticket counter, doorway, back stage	Projection booth, corridor, stairway	Spectators' seat (during a break), escape stairway, garden		3~1.5 Spectators' seats (while showing)	
Inn, hotel			Accounting office	Front desk, dining room	Guest room, amusement hall, corridor, lobby				
Diner, restaurant			* Sample case	* Register, kitchen, * dining table	Guest room, waiting room hallway				
Beauty parlor, barber			* Hairdo * Hair setting * Makeup	* Hairdo, * dressing	In shop				
Shop		* Highlighted display in show window * Highlighted show case	* Highlighted display in shop * Show window, ordinary show case	Ordinary display of shop Overall shop					
Department store		* Show window, main part on the 1st floor * Highlighted show case	Ordinary display Ordinary show case	Atmospheric display					

The combined use of local illumination is allowed in places marked with *. In these cases, it is desirable that the overall illumination should be 1 / 10 or more of the illumination by the local illumination.
* Reference: Illumination level JIS Z9110
· Each country has its own standard. Please check the standards for your own country.

Pocket Size



LX2

Easy to use lux meter

- Small stick shape sensor probe (sensor diameter φ9mm)
- 3999 count with analog bar graph
- Silicon photodiode
- Measuring range 0.1lx~399.9klx
- Data hold
- Auto power save (30min.)
- Cord length 900mm

mobiken Series

Pocket size meter but with high accuracy and wide ranges. Sensor / Probes can be all neatly contained and protected within the folding case. Easy to carry in a shirt pocket.



LX2	
Optical sensor	Si photodiode with approximated relative luminous efficiency (φ9mm)
Display	Numeric : 3999 full scale, Bargraph:42-segment
Sampling rate	Approx. 2 times/sec. for numeral display. Approx. 20 times/sec. for bar graph.
Measuring range	400.0/4000/40.00k/400.0klx
Accuracy	± (5%+1) below 3000 lx ± (7.5%+1) 3000 lx or higher Compatible JIS standard A class 23°C ±2°C
Temperature Characteristics	±5% at 23°C within operating temperature/humidity range
Relative spectral sensitivity	Approximation of spectral luminous efficiency of the standard photometric observer
Grazing-incidence light characteristics	Cosine curve approximation
Battery	LR44×2
Power consumption	Approx. 10mW
Operating temperature	0°C~40°C max. 80% RH no condensation
Storage temperature	-10°C~50°C max. 80% RH no condensation
Size / Mass	Main body : H117×W76×D18mm/approx. 120g Sensor probe : H84× W16×D10mm
Standard accessories included	Instruction manual

Analog Type



LX3132

Max 10000 lux measurable

- Various light source can be measured such as filament lamp, fluorescent lamp, and mercury lamp.
- Silicon photodiode
- Taut-band drop shock proof meter

Optional accessories

Carrying case : C-01

LX3132	
Range	100/300/1000/3000/10000LUX
Accuracy	±10% of full scale Receiver angle 30° (less than -3%) Receiver angle 60° (less than -10%)
Optical sensor	Si photodiode with approximated relative luminous efficiency
Indicator	Analog pointer Taut-band
Battery	R6P×2
Size / Mass	H163×W100×D47mm/300g
Standard accessories included	Instruction manual

Laser power meters

Laser power meters are measuring instruments that let a laser beam emitted from a laser light source enter the sensor light receiver and indicate the value by converting light energy into electric signals. The unit used for this purpose is W (watt). The laser power meter is used for checking the light power of and maintaining laser-operating equipment. Since silicon photo diode used at the receiver of the laser power meter has different photoelectric conversion ratios according to the wavelength of the light received, it needs to be calibrated by the measuring wavelength.

* It is possible to obtain approximate value for the measuring wavelength based on a spectral sensitivity characteristic graph of the silicon photo diode.

Reference: Main laser wavelength

- 830nm Infrared semiconductor laser
- 780nm Infrared semiconductor laser (e.g. Used for DVD player, bar-code reader, etc.)
- 670nm Visible semiconductor laser
- 633nm He-Ne laser, red semiconductor laser (e.g. Used for DVD player, bar-code reader, etc.)
- 532nm Green laser
- 488nm Argon ion laser
- 405nm Purple-blue laser

Optical power meters

Optical power meters are measuring instruments that indicate the power of an outgoing beam from an optical fiber connector by converting it into electric signals. It is mainly used for installation and maintenance of optical fiber and optical LAN. The unit of fiber light is generally expressed in W (watt) and dBm related to 1mW expressed in logarithm.

Conversion of dBm into mW [dBm] = 10 log₁₀ [mW]

10dBm=10mW 0dBm=1mW -10dBm=100 μW -20dBm=10 μW
-30dBm=1 μW -40dBm=100nW -50dBm=10nW -60dBm=1nW

Wavelength for each model

For long wave and long wavelength (1310nm,1550nm)
For short wave and long wavelength (650nm,780nm,800nm,850nm,880nm)
* Please contact us for products handling wavelengths other than the ones given above.

Optical Power Meter



Sensor extension cord (2m)

OPM37LAN

For fiber light (short wavelength 5 ranges)
Optical FC type fiber connector

- dBm and W measurement
- Relative value
- Offsetting, data averaging (20-data sequential averaging)
- Direct reading wavelength (650, 780, 800, 850, 880nm)
- RS-232C interface
- Various connectors can be equipped by changing optical connector adapter.
- 2m long sensor extension cord

Optional accessories

RS232C cable : KB-RS-OPM
SC-type optical connector adapter : OPA-F04
Simplex TOSLINK type optical connector adapter : OPA-F05
Duplex TOSLINK type optical connector adapter : OPA-F07
*Consult us regarding other type of connector.

DATA HOLD REL MAX MIN AVG 232c

OPM37LAN	
Display	4-digit digital
Ranges	Automatic, 8 ranges
Optical sensor	Si photodiode (sensor surface area 5.8×5.8mm)
Optical power measuring range	-60.00dBm~+13.00dBm 1.000nW~20.00mW
Optical input type	Direct to photodiode
Reference wavelengths	650nm, 780nm, 800nm, 850nm, 880nm
Accuracy	±5% (@ reference wavelength of -20dBm/10 μW)
Resolution	dBm/dB (REL) mode : 0.01dB W/W (REL) mode : 0.01%
Measuring cycle	3.33 times/sec.
Battery	006P type Alkaline battery or AC adapter (AD-30-2)
Size / Mass	Main body : H164×W85×D35mm/300g Sensor head : φ25×26mm/25g
Standard accessories included	Optical sensor, Extension cord, AC adapter (AD-30-2) FC-type (F01) connector adapter, Instruction manual
Accuracy : 18°C~25°C max. 80% RH no condensation	

Laser Power Meter (Pocket Size)



LP1

Optical power up to max. 40mW measurable
Direct reading wavelength customization

- Wide optical power measurement range
- Silicon photodiode
- Sensor can be all neatly contained and protected within the folding case.
- Max / Min hold
- Auto power save (30min.)
- 500mm sensor cord

Wavelength customization
The standard LP1 is calibrated at 633 nm but can also read any other wavelength in the 400~1100 nm range using a chart inside the case cover.
We can calibrate directly to any other 400~1100 nm wavelength for special orders, with one month lead time, so please contact our authorized agent if necessary.

mobiken Series
Pocket size meter but with high accuracy and wide ranges. Sensor / Probes can be all neatly contained and protected within the folding case. Easy to carry in a shirt pocket.

Laser Power Meter (Digital Type)



OPM35S

For space light measurement

- Silicon photodiode
- Measurable up to 50.00mW
- Relative value
- Max hold, data averaging (20-data sequential averaging)
- Direct reading wavelength (488, 633, 670, 780, 830nm)
- RS-232C interface

Optional accessories

RS232C cable : KB-RS-OPM

REL MAX MIN AVG 232c

OPM35S	
Display	4-digit digital
Ranges	Automatic, 5 ranges
Optical sensor	Si photodiode (sensor surface area 10x10mm)
Optical power measuring range	0.001 μW~50.00mW
Optical input type	Direct to photodiode
Reference wavelengths	488nm, 633nm, 670nm, 780nm, 830nm
Accuracy	±5% (@ reference wavelength of 100 μW)
Resolution	W/REL mode : 0.01%
Measuring cycle	3.33 times/sec.
Battery	006P type Alkaline battery or AC adapter (AD-30-2)
Size / Mass	H164×W85×D35mm/300g Sensor head : H126×W15×D4mm/40g
Standard accessories included	Optical sensor, AC adapter (AD-30-2), Instruction manual
Accuracy : 18°C~25°C max. 80% RH no condensation	

Tachometer

SE300

Non-contact type digital tachometer



- Designed for ease of holding to enable stable measurement
- Max/Min value hold
- Auto power off (2min.) (cancelable)
- Fixed installation possible using a commercially available camera tripod
- Contact measurement (optional ENC-3)

DATA HOLD AP OFF MAX MIN AVG BACK LIGHT

SE300	Non-contact	Contact (optional ENC-3)	Best accuracy
rpm	30.0~99999	30.0~19999	±(0.03%+1)
rps	0.50~1600.0	0.50~333.00	
ms	0.600~1999.0	3.000~1999.0	
count	0~99999	0~99999	
m/min	-	3.0~1999.0	
m/s	-	0.05~33.00	
Detection distance	Approx. 50~500mm		
Battery	R6P/LR6X2		
Size / Mass	H210×W60×D55mm/approx. 218g		
Standard	Reflective sticker(SE-T3), Carrying case(C-SE300), accessories included		
	Instruction manual		

Optional accessories

Reflective sticker(50stickersX2sheets) : SE-T3
Contact measurement attachment : ENC-3 (contact adapter, contact marker and rim speed ring)
Contact marker : SE-A30
Rim speed ring : SE-A31



Speed Meter

SE9100


For elevator maintenance, 2ch display

- Suitable for elevator speed measurement of high building
- 2 independent displays
- Analog output terminal to record measuring data
- 2 external hold terminals for remote control
- Memory function (max.10sets data)
- Averaging count function
- Easy to read LED displays
- Auto power off (3min.) (extendable to 1hr.)
- Low battery power alarm

AP OFF DATA HOLD MAX MIN AVG

SE9100	
Measuring range	Linear velocity: 0.1 ~ 2000.0 (m/min) Rotation speed: 1 ~ 20000 (r/min) Distance: 0 ~ 999 (mm)
Accuracy	±2dgt
Sampling time	0.2 sec.
Measuring time	0.01 sec.
Analog output	DC0 ~ 2V Analog output accuracy: ±(0.8%+2mV)
Data hold	CH1/CH2/Max. value Independent functions CH1/CH2: Hold by main unit panel or external triggering
Battery	LR6X4
Size / Mass	H174×W50×D50mm/approx.510g
Standard accessories included	Speed ring thickness 10mm (SE-10)X1 Speed ring thickness 0.9mm (SE-0.9)X1 Hold input cable (SE-L-H)X2 Analog output cable (SE-L-O)X1 Hex wrenchX1, Carrying case (C-SE)X1 Instruction manual

Remote control by SE9100

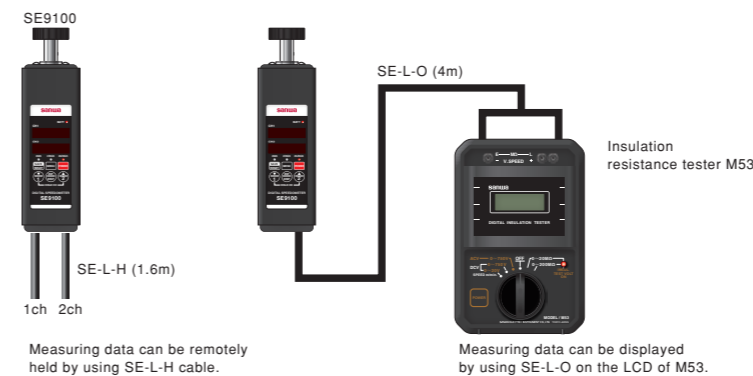


Earth Tester

Purpose of earth resistance

When some extraordinary cases occur, fault current and overcurrent may cause damages to equipment or a risk to humans because the equipment is not grounded. To prevent such risks, grounding plays an important role to assure safety. Grounding provides an escape way to electricity from an electric appliance through metal rod driven into the ground. After grounding works are performed to prevent hazards and assure safety, the earth resistance is measured. To measure the earth resistance, two grounding rods are stuck into the ground. Assuming that two rods are E and C, AC current I is applied between E and C. The earth resistance can be measured from the voltage generated between E and C. The relation between the current I and voltage V is expressed as follows. From this the earth resistance can be obtained. However, the earth resistance R

obtained this way includes not only the earth resistance at the grounding electrode E but also the earth resistance at the grounding electrode C. If a third grounding electrode P is provided between the grounding electrodes E and C, the earth resistance RE at the grounding electrode E alone can be obtained from the current I and voltage Vp between E and C.

* Although the grounding electrode P, too, has a resistance zone, it hardly affects the measurement because the impedance of the power supply of AC constant current is high.

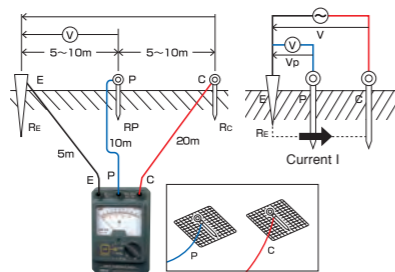

Arrangement of grounding rods

Three-electrode method

Arrange the earth E and auxiliary grounding rods P and C in a straight line at intervals of about 5 to 10m.

* If they cannot be arranged in a straight line because of the presence of an obstacle, arrange E-P and E-C at angles of about 30 degrees or less.

Two-electrode method

If an earth E whose grounding resistance is known is present nearby, the unknown grounding resistance can be measured by using it. Connect the terminal E of the earth resistance meter and the earth E by a cord. Measurements are taken between E and P / C assuming P and C terminals as one terminal.

* The indicated value includes the known resistance value of the earth E. Subtract the grounding resistance of E to obtain the true value.

- △ Sand, gravel and frozen soil → Expose soil.
- △ Concrete → Use a net. Flush enough water on the net to let it have a close contact with the ground.
- × Asphalt → Cannot be measured.

Detectors

Voltage Detector



KD2

- Beeping and LED lighting upon detection
- Switchable to measure cord or bare wire

KD2	
Measurement	Voltage Detection
Voltage range	AC80 to 600V, 50/60Hz
Compatible conductor	Cord and bare wire
Withstand voltage	AC2000V for 1 minute
Indicator	Beep sound and LED Beep: Over 50dB from 50cm away LED: 8000lx
Battery	Alkaline button cell LR44 (1.5V) X 2
Size / Mass	H133XW19XD19.5mm/Approx. 17g
Operating temperature	-10°C ~ 45°C

3phase Detector



KS1

- Phase sequence and open phase check
- Large size alligator clips

Safety : IEC61010 CAT. III 600V

KS1	
Measurement	Open phase and phase sequence
Voltage range	3 phase AC 100V - 600V
Frequency	45Hz ~ 70Hz
Time limit	AC110V: Continuous, AC220V: 3 hours, AC480V: 12 minutes
Fuse	0.2A/250V
Environment condition	Altitude 2000m or below, pollution degree II
Operating temperature /humidity	0°C ~ 40°C, 80%RH max. no condensation
Size	Main unit H102×W78×D32.5mm Alligator clips Approx. 0.8m (Red, White and Blue)
Mass	Approx. 212g (Alligator clips included)
Standard accessories included	Carrying case (C-KS) X 1, Instruction manual



KS3

Motor rotation direction testable

- Phase sequence and open phase checking of three-phase lines
- Rotation direction check by turning three-phase motor shaft manually
- Bright LED indication

Safety : IEC61010-1 CAT. III 500V, IEC61557-1,7, IEC61010-2-030, IEC61010-031, IEC61326-1

KS3	
Measurement	Motor rotation direction, open phase and phase sequence
Voltage range	3 phase, line voltage: AC75~500V (sine wave, continuous)
Frequency	40Hz ~ 400Hz
Motor rotation direction	Determined at rotation speeds from 2Hz (2 rotations/sec.) to 400Hz
Battery	6LR61(9V) X 1
Size / Mass	H128×W72×D38mm/Approx. 210g
Standard accessories included	Alligator clips (CL-KS), Test lead (TL-KS), Instruction manual, Carrying case (C-KS2)

Earth Tester



PDR302

Analog type display

- Phase detection system circuit for stable measurement
- Easy self calibration
- AC 30V range to avoid indication errors caused by leak current
- Power saving design with push switch
- Auxiliary grounding value excess indicator lamp



PDR302	
Earth resistance measuring range	10/100/1000Ω Accuracy : X1 range ±5% of full scale : X10, X100 range ±2.5% of full scale
ACV(leakage voltage) measuring range	0~30V Accuracy ±2.5% of full scale
Display	Analog
Operation	Constant current system (tripolar or bipolar)
Battery	R6P(1.5V) X 6
Size / Mass	W175×H118×D55mm/Approx. 500g
Standard accessories included	Measurement cord (TL-66), Clip adapter (CL-302), Earth bars (CL-ER), Carrying case (C-PDR302), Storage case (C-302CB), Instruction manual

LCR Meter

LCR Meter



LCR700

Useful for sorting device value

- Measuring Frequency DC~100kHz
- Ls/Lp/Cs/Cp measurement with sub parameters(D/Q/θ/ESR)
- Automatically selectable L/C/R measurement
- Device sorting mode
- Optical link USB interface (optional)
- Data hold, Back light

Sampling rate : 1.2 times / sec. (LCR mode)
0.5 times / sec. (DCR mode)

Optional accessories

Optical link cable unit : LCR-USB
SMD clip lead : CL-700SMD
AC adapter : AD-30-2



LCR700	
Measuring range	Best accuracy
Ls/Lp	20.000μ/200.00μ/2000.0μ/20.000m/200.00mH 2000.0m/20.000M/200.00/2000.0/20.000kH ±(0.3%+3)
Cs/Cp	200.00p/2000.0p/20.000n/200.00n/2000.0nF 20.000μ/200.00μ/2000.0μ/20.00mF ±(0.3%+3)
Rs/Rp	20.000/200.00/2.000k/20.00kΩ 200.00k/2.000M/20.000M/200.0MΩ ±(0.3%+3)
Ω	200.00/2.000k/20.00k/200.00kΩ 2.000M/20.000M/200.0MΩ ±(0.3%+3)
Battery	6LF22 (9V) X 1
Size / Mass	H184×W87×D45/Approx. 400g
Standard accessories included	Clip lead (CL-700), Holster (H-701), Instruction manual

Thermo Meter

There are two types of Thermo meters used in general : mercury thermo meter and alcohol thermo meter. For industrial use, an electric thermo meter with separate temperature detection element and display element is often used.

Sensor Type	Thermistor type	Thermocouple	Resistance thermometer
Feature	Measurements are made by using changes in electric resistance (inverse proportion). This type is low-priced but not suitable for measurements of high temperature (300 degrees or more).	Measurements are made by using temperature difference of contacts when two types of metal wires are electrically connected. It responds quickly, is easy to be processed and operates easily.	Its element is made from typically platinum, nickel or copper. It is higher accuracy and repeatability.
Sanwa Product	Use T-THP.	Use K-8 series.	TH3 T-300PC (for PC7 series, and PC20)

Thermo Meter (Pocket Size)



TH3

High accuracy & resolution

- Easy to carry in a shirt pocket
- Sensor probe can be snapped into a fixed position atop the case
- Data hold, Max / Min hold
- Relative value
- Nonslip sensor holder
- Auto power save (30min.)

mobiken Series

Pocket size meter but with high accuracy and wide ranges. Sensor / Probes can be all neatly contained and protected within the folding case. Easy to carry in a shirt pocket.



TH3	
Measuring range	-50.0°C ~ 200.0°C
Resolution	0.1°C
Accuracy	±(0.5%+0.5°C)
Sampling rate	Approx. 2 times/sec.
Display	3999
Sensor	Platinum foil thermometric resistor (100Ω at 0°C) Sheath type Pt 100Q φ2 x 64 JIS B class
Response	Approx. 7 sec. interval (speed of sensor's response to achieve the level of 90%)
Battery	LR44 X 2
Power consumption	Approx. 18mW
Accuracy assure temperature	23°C ± 7°C max. 80% RH No condensation
Operating temperature	5°C ~ 40°C max. 80% RH No condensation
Storage temperature	0°C ~ 50°C max. 80% RH No condensation
Size / Mass	H117×W76×D18mm/Approx. 120g
Standard accessories included	Instruction manual

Assembly Training Kit

Calibrator



Sanwa assembly training kits have been developed for educational uses. These assembly training kits are available for purchase from our agents only.

Analog type

KIT-8D

Learning kit designed for measurement of small capacity electric circuits

- Drop shock proof taut-band meter
- Battery check
- Meter zero adjuster
- Zero Ω adjuster
- Protective body cover



Complete image



KIT-8D	Measuring range	Accuracy
DCV	0.3/3/12/30/120/300/600V (20k Ω /V)	$\pm 3\%$ of full scale
ACV	12/30/120/300/600V (9k Ω /V)	$\pm 4\%$ of full scale
DCA	60 μ /3m/30m/0.3A	$\pm 3\%$ of full scale
Resistance	20/200/20k Ω	$\pm 3\%$ of arc
Battery check	1.5V	
Bandwidth	50 or 60Hz (sine wave)	
Battery	UM-3(1.5V) $\times 2$	
Fuse	$\phi 5.2 \times 20mm$ (250V/0.5A)	
Size / Mass	H159.5 \times W129 \times D41.5mm/approx.320g	

Standard accessories included



Digital type

PC20TK

General-purpose DMM kit

- 3-3/4 digits 4000 count
 - Capacitance measurement (40nF~100 μ F)
 - Data hold / Range hold
 - Safety cover for the μ A \cdot mA
 - Tilt stand
 - Optical link RS232C / USB interface(optional)
- Display : numeral display 4000
Sampling rate : 3 times / sec.



Complete image
※Holster is optional accessory.



PC20TK	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/750V	$\pm(1.0\%rdg+2dgt)$	0.1mV	DCV:
ACV	4/40/400/750V	$\pm(1.5\%rdg+5dgt)$	0.001V	10M Ω
DCA	400 μ /4000 μ /40m/400m	$\pm(1.5\%rdg+2dgt)$	0.1 μ A	100M Ω
ACA	400 μ /4000 μ /40m/400m	$\pm(2.0\%rdg+5dgt)$	0.1 μ A	ACV:10M Ω
Resistance	400/4k/40k/400k/4M/40M	$\pm(1.5\%rdg+5dgt)$	0.1 Ω	
Capacitance	40n/400n/4 μ /40 μ /100 μ F	$\pm(7\%rdg+8dgt)$	0.01nF	
Continuity	Buzzer sounds at between 10 Ω and 120 Ω . Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 1.5V			
Bandwidth	40~400Hz (sine wave)			
Fuse / Battery	0.5A/250V R300A $\phi 6.3 \times 30mm$ R6 $\times 2$			
Size / Mass	H158 \times W70 \times D41mm/230g			

Standard accessories included

Optional accessories

- Software : PC Link7
- Optical PC Link cable : KB-USB20
- Clamp probe : CL-20D, CL-22AD, CL33DC
- Temperature probe : T-300PC(PC Link software is necessary.)
- Clip adapter : CL-11, CL-13a, CL-15a, CL-DG3a, TL-8IC
- Holster : H-70



Calibrator

STD5000M (Order production)



Overview

The STD5000M is a calibrator with soft touch buttons that can generate a desired DC voltage / current, AC voltage / current, resistance, frequency, etc. with a high degree of accuracy and stability. The STD5000M is with a memory function allowing a broad range of uses for the device.

Ranges

- Voltage(DC-AC) : 0~1000V(6 ranges)
- Current(DC-AC) : 0~2000mA(6 ranges)
- Resistance1 : 0~500k Ω (10 Ω steps)
- Resistance2 : 24 steps fixed resistance value(4 kinds 6 ranges)
- Hz : 40Hz~999kHz(5 ranges)
















Features
















- High accuracy 0.03% (DCV DC mA)**
Reliable accuracy is achieved by using the standard voltage IC with a constant-temperature bath for the reference voltage and wire wound resistor and metal film resistor with high tolerance and low temperature coefficient for the resistance element.
- Calibrates 6 types of functions**
With the calibration elements of 6 functions(DCV, ACV, DCA, ACA, OHM, Hz) incorporated, it can be used for calibrating and maintaining the DMM, DPM (digital power meter), circuit tester and industrial instruments.
- Installs 90 (6x15) output memories**
With 90 (6x15) output memories installed, it is possible to save desired setting.
- User-friendly speedy operability**
Use of soft-touch push button switches for operation on the panel(except the power switch). Use of semiconductor switches with greater heat resistance and durability for change switches of the circuit, and latch-type relays requiring less electro motive force.
- With overload protection device**
To enhance security, overload protection in case of low voltage and current generation is performed on the semiconductor circuit, and overload protection in case of medium and high voltage generation(50V or more) is achieved by releasing the output terminal and circuit.

STD5000M	Measuring range	Generation range	Resolution	Set accuracy	Maximum load
DCV	50mV	0~50mV	1 μ V	$\pm(0.05\%+30\mu V)$	10mA
	500mV	0~500mV	10 μ V	$\pm(0.03\%+30\mu V)$	
	5V	0~5V	100 μ V	$\pm(0.03\%+200\mu V)$	
	50V	0~50V	1mV	$\pm(0.03\%+2mV)$	
	500V	0~500V	10mV	$\pm(0.03\%+20mV)$	
	1000V	0~1000V	100mV	$\pm(0.05\%+0.3V)$	
ACV	50mV	0~50mV	1 μ V	$\pm(0.1\%+50\mu V)$	10mA
	500mV	0~500mV	10 μ V	$\pm(0.06\%+100\mu V)$	
	5V	0~5V	100 μ V	$\pm(0.06\%+0.4mV)$	
	50V	0~50V	1mV	$\pm(0.06\%+4mV)$	
	500V	0~500V	10mV	$\pm(0.06\%+40mV)$	
	1000V	0~1000V	100mV	$\pm(0.1\%+0.4V)$	
DCA	50 μ A	0~50 μ A	1nA	$\pm(0.05\%+30nA)$	13V (Open circuit voltage)
	500 μ A	0~500 μ A	10nA	$\pm(0.05\%+30nA)$	
	5mA	0~5mA	100nA	$\pm(0.05\%+0.2\mu A)$	
	50mA	0~50mA	1 μ A	$\pm(0.05\%+2\mu A)$	
	500mA	0~500mA	10 μ A	$\pm(0.1\%+300\mu A)$	
	2000mA	0~2000mA	100 μ A	$\pm(0.1\%+300\mu A)$	
ACA	50 μ A	0~50 μ A	1nA	$\pm(0.12\%+60nA)$	13V (Open circuit voltage)
	500 μ A	0~500 μ A	10nA	$\pm(0.12\%+80nA)$	
	5mA	0~5mA	100nA	$\pm(0.1\%+0.5\mu A)$	
	50mA	0~50mA	1 μ A	$\pm(0.1\%+5\mu A)$	
	500mA	0~500mA	10 μ A	$\pm(0.1\%+50\mu A)$	
	2000mA	0~2000mA	100 μ A	$\pm(0.15\%+0.5mA)$	
OHM1	—	0~500k Ω	10 Ω	—	—
Frequency	40~99.9Hz	0.1Hz	—	$\pm(0.1\%+0.1Hz)$	—
	40~999Hz	1Hz	—	$\pm(0.1\%+1Hz)$	—
	40~9.99kHz	10Hz	—	$\pm(0.1\%+10Hz)$	—
	100~99.9kHz	100Hz	—	$\pm(0.1\%+100Hz)$	—
	1k~999kHz	1kHz(Rectangular wave)	—	$\pm(0.1\%+1kHz)$	—
0~7V	0.1V	—	$\pm(2\%+0.2V)$	—	

STD5000M	Measuring range	Accuracy
OHM2	160/260/360/460 Ω	$\pm(0.05\%+0.1\Omega)$
	1.6k/2.6k/3.6k/4.6k Ω	$\pm(0.05\%)$
	16k/26k/36k/46k Ω	$\pm(0.05\%)$
	160k/260k/360k/460k Ω	$\pm(0.05\%)$
	1,600k/2,600k/3,600k/4,600k Ω	$\pm(0.05\%\sim 0.08\%)$
	16M/26M/36M/46M Ω	$\pm(0.05\%\sim 0.2\%)$
Memory	6 \times 15(90)	

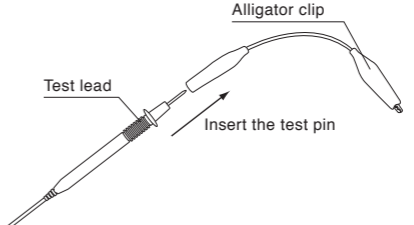50mV adjust digit	4-1/2 digit(except for 1000V, 2000mA, OHM2)
Max. display	50099
Output adjust	LOCAL(surface panel)
Operating range	23 $\pm 3^{\circ}$ C below 70%RH
Preheating time	30~60m.
Power supply	AC100V $\pm 10\%$, 50Hz, 60Hz
Power consumption	30VA
Protection	DC and 50 V or higher AC ranges: Overload protection device with reset switch. DC and 5 V or lower AC ranges: Overload protection circuitry.
Size / Mass	H180 \times W480 \times D580mm/25kg
Standard accessories included	Instruction manual

<p>Test lead</p> <p>TL-11Ta</p>  <p>Length 0.56m Applicable model See P.51</p>	<p>TL-21a</p>  <p>IEC61010 CAT.III 600V CAT.II1000V Length 1m Applicable model See P.51 Adapter CL-14, CL-15a, CL-DG3a TL-9IC, TL-A7M, TL-A7M2</p>	<p>TL-21M</p>  <p>φ 0.7mm shape-memory alloy test pin Exchangeable φ 2mm pin Length 1m Applicable model See P.51 Adapter CL-14, CL-15a CL-DG3a, TL-9IC</p>
<p>TL-23a</p>  <p>IEC61010-031 CAT.II1000V CAT.III600V 10A Length 1m Applicable model See P.51 Adapter CL-14, CL-15a, CL-DG3a TL-9IC, TL-A7M, TL-A7M2</p>	<p>TL-25a</p>  <p>IEC61010-031 CAT.II1000V CAT.III600V 20A Length 1m Applicable model See P.51 Adapter CL-14, CL-15a, CL-DG3a TL-9IC, TL-A7M, TL-A7M2</p>	<p>TL-29</p>  <p>IEC61010 CAT.IV1000V Length 1m Applicable model See P.51</p>
<p>TL-61 TL-91</p>  <p>Length 0.9m Applicable model See P.51 Adapter CL-14, CL-15a, CL-DG3a, TL-9IC</p>	<p>TL-61Ta TL-61Tb TL-61Tc</p>  <p>Length 0.85m Applicable model See P.51</p>	<p>TL-91M</p>  <p>φ 0.7mm shape-memory alloy test pin Exchangeable φ 2mm pin Length 1m Applicable model See P.51 Adapter CL-14, CL-15a CL-DG3a, TL-9IC</p>
<p>TL-112a</p>  <p>IEC61010-031 CAT.III1000V CAT.IV600V 10A Length 1m Applicable model See P.51 Adapter CL-16</p>	<p>TL-509S</p>  <p>IEC61010 CAT.III600V Length 1m Applicable model See P.51</p>	<p>TLF-120</p>  <p>IEC61010 CAT.III600V Built-in fuse 500mA/1000V 30kA φ 6.35X32mm Length 1.4m Applicable model See P.51</p>
<p>TL-M54</p>  <p>Length 1m Applicable model See P.51</p>	<p>TL-PM3</p>  <p>Length 0.55m Applicable model See P.51</p>	<p>TL-36</p>  <p>IEC61010 CAT.IV600V Length 1.5m Applicable model KP1</p>

<p>HV probe</p> <p>HV-10 / HV-20</p>  <p>480M Ω resistor measurement for 0~30kV or 25kV Length 1m Applicable model See P.52</p>	<p>HV-60</p>  <p>1000M Ω resistor measurement for 0~30kV or 25kV Length 1.2m Applicable model See P.52</p>	<p>Adapter</p> <p>CL-13a</p>  <p>IEC61010 CAT.III 1000V Alligator clip (use with test leads by inserting pins into socket) Length 70mm Applicable model See P.52</p>
<p>CL-14</p>  <p>Alligator clip (use with test leads by inserting pins into socket) Length 0.23m Applicable model See P.52</p>	<p>CL-15a</p>  <p>IEC61010 CAT.III1000V Alligator clip (use with test leads by inserting pins into socket) Length 0.2m Applicable model See P.52</p>	<p>CL-16</p>  <p>Alligator clip (use with test leads by inserting pins into socket) Length 70mm Applicable model MG500 MG1000</p>
<p>CL-DG3a</p>  <p>IEC61010 CAT.III600V Alligator clip (use with test leads by inserting pins into socket) Length 0.33m Applicable model See P.52</p>	<p>TL-9IC</p>  <p>IC clip (use with test leads by inserting pins into socket) Length 0.2m Applicable model See P.52</p>	<p>TL-A7M</p>  <p>φ 0.7mm shape-memory alloy test pin Exchangeable φ 2mm pin (optional) Length 231mm Applicable model See P.52</p>
<p>TL-A7M2</p>  <p>φ 0.7mm shape-memory alloy test pin Exchangeable φ 2mm pin (optional) Length 57mm Applicable model See P.52</p>	<p>How to use : CL-13a, CL-14, CL-15a, CL-16, CL-DG3a, TL-9IC TL-A7M, TL-A7M2</p> 	<p>CL-561</p>  <p>Length 0.13m Applicable model HG561H</p>
<p>TL-A01</p>  <p>IEC61010 CAT.IV600V Length 51mm Applicable model KP1</p>	<p>Clip lead</p> <p>CL-700</p>  <p>Length 0.16m Applicable model LCR700</p>	<p>CL-700SMD</p>  <p>Length 0.55m Applicable model LCR700</p>

Clip lead for hFE measurement

CE

CL-506a



Length 0.3m
Applicable model
See P.52

HFE probe

HFE-6T



hFE 0 ~ 1000
Length 0.3m
Applicable model
See P.52

Test probe

CE

TL-35



IEC61010 CAT.IV600V
Length 0.11m
Applicable model
KP1

Temperature sensor

K-8-250



-50°C~250°C
Surface shape thermocouple K type
Sensor : 15 × 16mm
Length 1m
Applicable model
See P.53

K-8-300



-50°C~300°C
Sheath shape thermocouple K type
Sensor : φ 3.1 × 150mm
Length 1.2m
Applicable model
See P.53

K-8-500



-50°C~500°C
Surface shape thermocouple K type
Sensor : 15 × 16mm
Length 1m
Applicable model
See P.53

TL-561



Length 0.11m
Applicable model
HG561H

AC adapter

CE

AD-30-2



Length 2.1m
Applicable model
LCR700, OPM-360,
OPM37LAN, OPM35S

AD-71AC-2 (100V)
AD-72AC (220V)

Length 1.9m
Applicable model
PC20

AD-72AC

K-8-650





-50°C~650°C
flexible thermocouple K type
Sensor : φ 1 × 300mm
Length 1.4m
Applicable model
See P.53


K-8-800



-50°C~800°C
Sheath shape thermocouple K type
Sensor : φ 3.1 × 150mm
Length 1.2m
Applicable model
See P.53

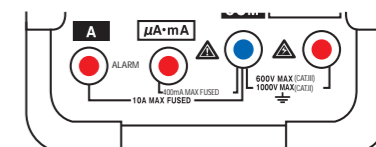To use K-8 series,
K-AD adapter is required.

K-AD (optional)

K type temperature probe
with international
miniature connector

Optical link

CE

KB-USB20



Optical link USB
PC connection cable
Length 1.3m
Applicable model
PC20, PC20TK

KB-USB7



Optical link USB
PC connection cable
Length 1.3m
Applicable model
See P.53

KB-USB773



Optical link USB
PC connection cable
Length 1.3m
Applicable model
PC773

Notice :

RD700 / 701 and CD772 can only
measure -20°C~300°C (max) regardless
of the specification of temperature probe.
Accuracy of K-8-XXX
-40°C~330°C : ±2.5°C
330°C~1200°C : ±0.75% of measured
temperature

K-AD



Thermocouple K type adaptor
for connecting to K-8-250~K-8-800
Length 50mm
Applicable model
PC7000, PC720M, PC710, PC20, CD772,
RD700, RD701

LCR-USB
(with LCR Link Software)

Optical link USB
PC connection cable
Length 1.3m
Applicable model
LCR700

PC Link

PC Link 7



CD-ROM
Applicable model
PC7000, PC720M,
PC710, PC700, PC773
PC20, PC20TK

PC Communication Set

G: KB-USB773+PC Link7

Applicable model
PC773

H: KB-USB7+PC Link7

Applicable model

PC7000, PC720M, PC710, PC700

I: KB-USB20+PC Link7

Applicable model
PC20, PC20TK

Carrying case

C-09S



185 × 160 × 55mm
Applicable model
PDM1529S, PDM5219S,
DM1009S, DM509S, PDM509S
SP20, SP21, TA55

C-77



Soft case
195 × 130 × 75mm
Applicable model
PC773, CD770,
CD771, CD772

C-77H



190 × 140 × 70mm
Applicable model
PC773, CD770,
CD771, CD772

Temperature sensor

T-THP



-20°C~200°C
Thermistor probe
Sensor : φ 2.5 × 31mm
Length 0.9m
Applicable model
See P.53

T-300PC



-50°C~300°C
Platinic thin film
Sensor : φ 3.2 × 135mm
Length 2.2m
Accuracy : ± 1.9°C
Applicable model
See P.53

K-250CD
K-250PC

-50°C~250°C
Linear thermocouple K type
Length 1m
Applicable model
See P.53

C-CA



180 × 150 × 50mm
Applicable model
CX506a, EM7000

C-CD



190 × 145 × 70mm
Applicable model
RD700, RD701

C-CL



Soft case
190 × 90 × 45mm
Applicable model
DCM-22AD,
CL33DC, CL-22AD

Carrying case

C-CL3000



220 × 180 × 65mm
Applicable model
DCL3000R, CL3000

C-DG3a



Soft case
with magnet sheets
150 × 90 × 45mm
Applicable model
HG561H, DG34a, DG35a
DG36a, KP1, PM33a

C-M53



Soft case
130 × 190 × 70mm
Applicable model
M53

C-PC7



205 × 140 × 80mm
Applicable model
PC7000, PC720M,
PC710, PC700,
LCR700

C-PC10/S



240 × 155 × 65mm
Applicable model
PC20, CD732

C-PM3



119 × 78 × 16mm
Applicable model
PM3

C-SP



Soft case
165 × 140 × 50mm
Applicable model
PC20, CD732,
AU-32, AU-31
SP21, SP20, TA55

C-SPH



160 × 150 × 55mm
Applicable model
SP21, SP20, TA55

C-YS



160 × 140 × 40mm
Applicable model
YX-361TR

Holster

H-50



Applicable model
RD700, RD701

H-70



Applicable model
PC20, CD732

H-700



Applicable model
PC7000, PC720M
PC710, PC700

Hanger magnet

HM-1



77 × 26 × 17mm
Applicable model
CD800b, CD800F

Accessory mapping

Model	TEST LEAD																	
	TL-11Ta	TL-21a	TL-21M	TL-23a	TL-25a	TL-29	TL-61	TL-61T	TL-82	TL-84	TL-91	TL-91M	TL-112a	TL-509S	TL-M54	TL-100-OM	TL-PM3	TLF-120
Model																		
CD731a	-	○	●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
CD732	-	●	●	●	○	-	-	-	-	-	-	-	-	-	-	-	-	-
CD770	-	○	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
CD771	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
CD772	-	-	-	-	○	-	-	-	-	-	-	-	-	-	-	-	-	●
CD800a	-	-	-	-	-	-	-	TL-61Ta	-	-	-	-	-	-	-	-	-	-
DA-50C	-	-	-	-	-	-	○	-	-	●	●	-	-	-	-	-	-	-
PC20	-	○	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
PC500a	-	●	●	○	●	-	-	-	●	-	-	-	-	-	-	-	-	●
PC5000a	-	●	●	○	●	-	-	-	●	-	-	-	-	-	-	-	-	●
PC510a	-	●	●	○	●	-	-	-	●	-	-	-	-	-	-	-	-	●
PC520M	-	●	●	●	●	-	-	-	○	-	-	-	-	-	-	-	-	●
PC700	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
PC7000	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
PC710	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
PC720M	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
PC773	-	●	●	●	○	-	-	-	-	-	-	-	-	-	-	-	-	●
PM3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	○	-
PM33a	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PM7a/PS8a	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PM11	○	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
RD700/701	-	●	●	○	●	-	-	-	●	-	-	-	-	-	-	-	-	●
CAM600S	-	○	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DCL11R/30DR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DCL1000/1200R	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DCL3000R	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DCM-22AD	-	-	-	-	-	-	○	-	-	-	●	●	-	-	-	-	-	-
DCM2000	-	●	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DCM2000AD	-	○	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DCM2000R	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DCM2000DR	-	-	-	-	-	○	-	-	-	-	-	-	-	-	-	-	-	-
DCM400/AD	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DCM60L	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DCM60R	-	○	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DCM600DR	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DCM660R	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	●
DLC-330L	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DLC-400A	-	●	●	●	●	-	○	-	-	-	●	●	-	-	-	-	-	-
DLC460F	-	●	●	○	●	-	-	-	-	-	-	-	-	-	-	-	-	-
DG6/7/8/9/10	○	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DG251	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DG525	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DM1008S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DM1009S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
DM1528S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
DM5218S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
DM508S/PDM508S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
DM509S/PDM509S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
PDM1529S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
PDM5219S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
HG561H	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
M53	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MG1000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MG500/125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
AP33	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
AU-31/32	-	-	-	-	-	-	○	-	-	-	●	●	-	-	-	-	-	-
CP-7D	-	-	-	-	-	-	-	-	-	○	-	-	-	-	-	-	-	-
CX506a	-	○	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
EM7000	-	○	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
SH-88TR	-	-	-	-	-	-	○	-	-	-	●	●	-	-	-	-	-	-
SP-18D	-	-	-	-	-	-	-	TL-61Tc	-	-	-	-	-	-	-	-	-	-
SP20	-	-	-	-	-	-	○	-	-	-	●	●	-	-	-	-	-	●
SP21	-	○	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	●
TA55	-	-	-	-	-	-	-	-	-	○	●	●	-	-	-	-	-	●
VS-100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
YX360TRF	-	-	-	-	-	-	-	TL-61Tb	-	-	-	-	-	-	-	-	-	-
YX-361TR	-	-	-	-	-	-	○	-	-	-	●	●	-	-	-	-	-	-

● Optional ○ Standard

Clamp Meter, Insulation Resistance Tester, PC Link System, Digital Multimeter, Analog Multimeter, Various Instruments, Accessories

Clamp Meter, Insulation Resistance Tester, PC Link System, Digital Multimeter, Analog Multimeter, Various Instruments, Accessories

Clamp Meter comparative chart

Display Type	AC	AC	AC	AC	AC	AC	AC
Model	DCL1200R	DCL1000	DCL11R	DCL3000R	DCM660R	DCM60L	DCM60R
Digit	6000	4000	6000	3150	6600	1999	1999
Category	CAT.III 600V	CAT.III 600V	CAT.III300V	CAT.IV 600V	CAT.III 600V	CAT.III300V	CAT.III300V
CE	●	●	●	●	●	●	●
Clamp diameter (mm)	42	42	22	150	30	25	25
Range	A/M	A/M	A	M	A	A	A
DCA (A)	-	-	-	-	-	-	-
ACA (A)	400 1200	400 1000	60 300	30 300 3000	66 600	200 600	199.9 600
DCV (V)	6 60 600	400m 4 40 400 600	-	-	600	-	-
ACV (V)	6 60 600	400m 4 40 400 600	-	-	600	200 600	199.9 600
Resistance (Ω)	6k 60k 600k 6M	400 4k 40k 400k 4M 40M	-	-	660	200	199.9
Frequency (Hz)	9.999 99.99 999.9 9.999k 30.00k	-	-	-	660~6.6k (when clamping) 30k (when clamping) 6.6k 66k 100k	-	-
Backlight	●	-	●	●	●	-	●
True RMS	●	-	●	●	●	-	●
Auto power save	●	●	●	●	●	-	-
Peak hold	-	-	-	-	INRUSH	-	-
Data hold	●	●	●	●	●	●	●
Range hold	●	-	-	-	-	-	-
EF (NCV)	●	-	-	-	-	-	-
LPF	-	-	-	-	-	-	-
Bargraph	-	-	-	-	-	-	-
Continuity	BUZZER	BUZZER	-	-	BUZZER	BUZZER	BUZZER
Dimension (H) mm	238	238	145	120	208	187	187
Dimension (W) mm	95	95	54	70	69	50	50
Dimension (D) mm	45	45	31	26	38	29	29
Mass (g)	290	290	120	300	265	210	210

Clamp Meter comparative chart

Display Type	AC	AC (Analog)	DC/AC	DC/AC	DC/AC	DC/AC	DC/AC	DC/AC	LEAK
Model	DCM400	CAM600S	DCM600DR	DCM400AD	DCM-22AD	DCM2000DR	DCL31DR	DLC460F	
Digit	4000	-	6000	4000	1999	6000	6000	6000/9999	
Category	CAT. III300V	-	CAT. III600V	CAT. III300V	-	CAT. IV 1000V	CAT. III300V	CAT. III600V	
CE	●	-	●	●	-	●	●	●	
Clamp diameter (mm)	25	36	30	25	23	55	25	35	
Range	A	M	A	A	M	A/M	A	A	
DCA (A)	-	-	60	40	20	200	60	-	
ACA (A)	40 400	6 15 60	60 600	40 400	2 20	200 2000	60 400	60m 600m	
DCV (V)	400 600	60	600	400	2	6	-	600	
ACV (V)	400 600	150 300 600	600	400	2	6	-	600	
Resistance (Ω)	400	1k 100k	999.9	400	2k 20k 200k 2000k	600 6k 60k 600k 6M 40M	-	999.9	
Frequency (Hz)	20~4k (when clamping)	-	-	-	-	10~1999	-	-	
Backlight	-	-	●	-	-	●	●	●	
True RMS	-	-	●	-	-	●	●	-	
Auto power save	●	-	●	●	-	●	●	●	
Peak hold	-	-	●	-	-	●	●	-	
Data hold	●	POINTER LOCK	●	●	●	●	●	●	
Range hold	-	-	-	●	-	●	-	-	
EF (NCV)	-	-	-	-	-	-	-	-	
LPF	-	-	-	-	-	●	-	●	
Bargraph	●	-	-	●	-	-	-	-	
Continuity	BUZZER	-	BUZZER	BUZZER	BUZZER	BUZZER	-	BUZZER	
Dimension (H) mm	193	221	208	193	179	264	145	206	
Dimension (W) mm	50	97	69	50	56	97	54	83	
Dimension (D) mm	28	43	38	28	26.5	43	31	38	
Mass (g)	230	420	260	230	140	640	120	320	

Insulation Resistance Tester comparative chart

Display Type	DIGITAL				
Model	MG5000	MG1000	MG500	HG561H	M53
Category	CAT.IV600V	CAT.III600V	CAT.III600V	CAT.III300V	-
CE	●	●	●	●	-
Test voltage range	5	3	3	7	2
Insulation resistance	5000V/1000GΩ	1000V/4000MΩ	500V/4000MΩ	15V/25V/50V/21MΩ	500V/200MΩ
(Test voltage/ Maximum scale value)	2500V/100GΩ 1000V/2000MΩ	500V/4000MΩ 250V/4000MΩ	250V/4000MΩ 125V/4000MΩ	100V/125V/250V/500V/110MΩ	15V/20MΩ
ACV (V)	1000	600	600	600	750
DCV (V)	1000	600	600	600	750
Resistance	-	400/4000	400/4000	999.9/99.99k/999.9k	-
Discharge	●	●	●	●	-
Backlight	●	●	●	●	-
Inner battery check	●	●	●	●	-
Data hold	●	●	●	●	-
Auto power save	●	●	●	●	●
Dimension (H) mm	188	170	170	139	175
Dimension (W) mm	225	142	142	91	115
Dimension (D) mm	97	57	57	29	55
Mass (g)	1750	600	600	230	600

Display Type	ANALOG				
Model	PDM1529S	PDM5219S	DM1009S	DM509S	PDM509S
Category	CAT.III600V	CAT.III600V	CAT.III600V	CAT.III600V	CAT.III600V
CE	●	●	●	●	●
Test voltage range	3	3	1	1	1
Insulation resistance	1000V/2000MΩ	500V/100MΩ	1000V/2000MΩ	500V/1000MΩ	500V/100MΩ
(Test voltage/ Maximum scale value)	500V/100MΩ 250V/100MΩ	250V/100MΩ 125V/100MΩ	-	-	-
ACV (V)	600	600	600	600	600
DCV (V)	60	60	60	60	60
Discharge	●	●	●	●	●
Backlight	-	-	-	-	-
Inner battery check	●	●	●	●	●
Meter structure	BAND	BAND	BAND	BAND	BAND
Data hold	-	-	-	-	-
Auto power save	-	-	-	-	-
Dimension (H) mm	144	144	144	144	144
Dimension (W) mm	99	99	99	99	99
Dimension (D) mm	43	43	43	43	43
Mass (g)	310	310	310	310	310

MΩ Tester comparative chart

Display Type	DIGITAL		
Model	DG34a	DG35a	DG36a
Category	-	-	-
CE	-	-	-
Test voltage range	3	3	3
Insulation resistance	500V/400MΩ	500V/40MΩ	250V/40MΩ
(Test voltage/ Maximum scale value)	250V/400MΩ 125V/400MΩ	250V/40MΩ 125V/40MΩ	125V/40MΩ 50V/40MΩ
ACV (V)	600	600	600
DCV (V)	600	600	600
Resistance	-	-	-
Discharge	-	-	-
Backlight	●EL	●EL	●EL
Inner battery check	-	-	-
Data hold	●EL	●EL	●EL
Auto power save	-	-	-
Dimension (H) mm	130	130	130
Dimension (W) mm	75	75	75
Dimension (D) mm	19.9	19.9	19.9
Mass (g)	160	160	160

Digital Multimeter comparative chart

Model	PC7000	PC720M	PC710	PC700	PC773	PC20
Digit	5000/500000	9999/6000	9999/6000	9999/6000	11000	4000
Category	CAT.III600V	CAT.III600V	CAT.III600V	CAT.III600V	CAT.III600V	-
CE	●	●	●	●	●	-
Range	A/M	A/M	A/M	A/M	A/M	A/M
DCV (V)	500m	60m	60m	60m	110m	400m
	5	600m	600m	600m	1.1	4
	50	9.999	9.999	9.999	11	40
	500	99.99	99.99	99.99	110	400
	1000	999.9	999.9	999.9	1000	1000
	-	-	-	-	-	-
ACV (V)	500m	60m	60m	60m	110m	4
	5	600m	600m	600m	1.1	40
	50	9.999	9.999	9.999	11	400
	500	99.99	99.99	99.99	110	750
	1000	999.9	999.9	999.9	1000	-
	-	-	-	-	-	-
DCA (A)	500 μ	600 μ	600 μ	600 μ	110μ	400 μ
	5000 μ	6000 μ	6000 μ	6000 μ	1100μ	4000 μ
	50m	60m	60m	60m	11m	40m
	500m	600m	600m	600m	110m	400m
	5	6	6	6	11	4
	10	10	10	10	-	10
ACA (A)	500 μ	600 μ	600 μ	600 μ	110μ	400 μ
	5000 μ	6000 μ	6000 μ	6000 μ	1100μ	4000 μ
	50m	60m	60m	60m	11m	40m
	500m	600m	600m	600m	110m	400m
	5	6	6	6	11	4
	10	10	10	10	-	10
Resistance (Ω)	500	600	600	600	110	400
	5k	6k	6k	6k	1.1k	4k
	50k	60k	60k	60k	11k	40k
	500k	600k	600k	600k	110k	400k
	5M	6M	6M	6M	1.1M	4M
	50M	60M	60M	60M	11M	40M
	-	-	-	-	110M	-
Capacitance (F)	50n	60n	60n	60n	11n	50
	500n	600n	600n	600n	110n	500n
	5 μ	6 μ	6 μ	6 μ	1.1μ	5 μ
	50 μ	60 μ	60 μ	60 μ	11μ	50 μ
	500 μ	600 μ	600 μ	600 μ	110μ	100 μ
	5m	6m	6m	6m	1.1m	-
	25m	25m	25m	25m	11m/110m	-
Temperature (°C) min	-50	-50	-50	○	○	○
Temperature (°C) max	1000	1000	1000	○	○	○
Frequency (Hz) min	10	15	15	15	11.1	-
Frequency (Hz) max	200k	50k	50k	50k	1.1M	-
Logic frequency (Hz) min	5	5	5	5	-	-
Logic frequency (Hz) max	2M	1M	1M	1M	-	-
Continuity	BUZZER	BUZZER	BUZZER	BUZZER	BUZZER/LED	BUZZER
Diode test	●	●	●	●	●	●
Duty cycle	●	●	●	●	-	-
dBm	●	-	-	-	-	-
Conductance	●	●	●	-	-	-
Auto power save	●	●	●	●	●	●
Battery check	-	-	-	-	-	-
Data hold	●	●	●	●	●	●
Range hold	●	●	●	●	●	●
Peak hold	●	●	●	-	-	-
Relative value	●	●	●	●	●	-
4-20mA%	●	-	-	-	-	-
True RMS (AC)	●	●	●	-	●	●
Auto zero adjust	-	-	-	-	-	●
Bargraph	●	●	●	●	-	●
Max/Min	●	●	●	-	-	-
Backlight	●	●	●	●	●	-
PC link	○	○	○	○	○	○
Dimension (H) mm	184	184	184	184	166	179
Dimension (W) mm	86	86	86	86	82	87
Dimension (D) mm	52	52	52	52	44	55
Mass (g)	430	430	430	430	360	460

○ Optional accessory is necessary.

Digital Multimeter comparative chart

Model	CD770	CD771	CD772	RD700 / 701	CD800a	CD800b	CD800F
Digit	4000	4000	4000	4000	4000	6000	6000
Category	-	CAT.III600V	CAT.III600V	-	-	CAT.IV300V	CAT.IV1000V
CE	-	●	●	-	-	●	●
Range	A/M	A/M	A/M	A/M	A/M	A/M	A/M
DCV (V)	400m	400m	400m	400m	400m	600m	600m
	4	4	4	4	4	6	6
	40	40	40	40	40	60	60
	400	400	400	400	400	600	600
	600	1000	1000	1000	600	-	1000
ACV (V)	4	4	4	400m	4	6	6
	40	40	40	4	40	60	60
	400	400	400	40	400	600	600
	600	1000	1000	400	600	-	1000
	-	-	-	1000	-	-	-
DCA (A)	400μ	400μ	400μ	400μ	40m	60m	-
	4000μ	4000μ	4000μ	4000μ	400m	600m	-
	40m	40m	40m	40m	-	-	-
	400m	400m	400m	400m	-	-	-
	-	4	4	4	-	-	-
ACA (A)	400μ	400μ	400μ	400μ	40m	60m	-
	4000μ	4000μ	4000μ	4000μ	400m	600m	-
	40m	40m	40m	40m	-	-	-
	400m	400m	400m	400m	-	-	-
	-	4	4	4	-	-	-
Resistance (Ω)	400	400	400	400	400	600	600
	4k	4k	4k	4k	4k	6k	6k
	40k	40k	40k	40k	40k	60k	60k
	400k	400k	400k	400k	400k	600k	600k
	4M	4M	4M	4M	4M	6M	6M
	40M	40M	40M	40M	40M	60M	60M
Capacitance (F)	50n	50n	50n	500n	50n	60n	60n
	500n	500n	500n	5μ	500n	600n	600n
	5μ	5μ	5μ	50μ	5μ	6μ	6μ
	50μ	50μ	50μ	500μ	50μ	60μ	60μ
	100μ	100μ	100μ	3000μ	100μ	600μ	600μ
Temperature (°C) min	-	-	-20	-20	-	-	-
Temperature (°C) max	-	-	300	300	-	-	-
Frequency (Hz) min	1	1	1	10	1	10	10
Frequency (Hz) max	100k	100k	100k	1M	100k	99.99k	99.99k
Logic frequency (Hz) min	-	-	-	-	-	-	-
Logic frequency (Hz) max	-	-	-	-	-	-	-
Continuity	BUZZER	BUZZER/LED	BUZZER/LED	BUZZER	BUZZER	BUZZER	BUZZER
Diode test	●	●	●	●	●	●	●
Duty cycle	-	-	-	-	●	-	-
dBm	-	-	-	-	-	-	-
Conductance	-	-	-	-	-	-	-
Auto power save	●	●	●	●	●	●	●
Battery check	-	●	-	-	-	-	-
Data hold	●	●	●	●	●	●	●
Range hold	●	●	●	●	●	●	●
Peak hold	-	-	-	-	-	-	-
Relative value	-	●	●	●	●	●	●
4-20mA%	-	-	-	-	-	-	-
True RMS (AC)	-	-	●	RD701 Only	-	●	●
Auto zero adjust	-	-	-	-	-	-	-
Bargraph	-	-	-	-	-	-	-
Max/Min	-	-	-	-	-	●	●
Backlight	-	●	●	-	-	●	●
PC link	-	-	-	-	-	-	-
Dimension (H) mm	166	166	166	179	176	166	166
Dimension (W) mm	82	82	92	87	104	100	100
Dimension (D) mm	44	44	44	55	46	43	43
Mass (g)	340	360	360	460	340	360	360

Digital Multimeter comparative chart

Model	CD731a	CD732	PM300	PM3	PM11	PM7a/PS8a	PM33/PM33a
Digit	4000	6000	6000	4000	4000	4000	6600
Category	-	CAT.III600V	CAT.IV300V	CAT.II500V	CAT.III300V	-	CAT.II600V
CE	-	●	●	●	●	-	●
Range	A/M	A/M	A	A	A	A/M	A
DCV (V)	400m	600m	600m	400m	400m	400m	660m
	4	6	6	4	4	4	6.6
	40	60	60	40	40	40	66
	400	600	600	400	400	400	660
	1000	1000	-	500	500	500	-
ACV (V)	4	6	6	4	4	4	660m
	40	60	60	40	40	40	6.6
	400	600	600	400	400	400	66
	750	750	-	500	500	500	660
	-	-	-	-	-	-	-
DCA (A)	400μ	600μ	-	-	-	-	100A
	4000μ	6000μ	-	-	-	-	-
	40m	60m	-	-	-	-	-
	400m	600m	-	-	-	-	-
	4	6	-	-	-	-	-
ACA (A)	400μ	600μ	-	-	-	-	100A
	4000μ	6000μ	-	-	-	-	-
	40m	60m	-	-	-	-	-
	400m	600m	-	-	-	-	-
	4	6	-	-	-	-	-
Resistance (Ω)	400	600	600	400	400	400	660
	4k	6k	6k	4k	4k	4k	6.6k
	40k	60k	60k	40k	40k	40k	66k
	400k	600k	600k	400k	400k	400k	660k
	4M	6M	6M	4M	4M	4M	6.6M
	40M	60M	60M	40M	40M	40M	66M
Capacitance (F)	40n	40n	60n	5n	-	-	6.6n
	400n	400n	600n	50n	-	-	66n
	4μ	4μ	6μ	500n	-	-	660n
	40μ	40μ	60μ	5μ	-	-	6.6μ
	100μ	400μ	600μ	50μ	-	-	66μ
Temperature (°C) min	-	-	-	-	-	-	-
Temperature (°C) max	-	-	-	-	-	-	-
Frequency (Hz) min	-	5	10	9.999	-	-	20
Frequency (Hz) max	-	99.99k	99.99k	60k	-	-	66k
Logic frequency (Hz) min	-	-	-	-	-	-	-
Logic frequency (Hz) max	-	-	-	-	-	-	-
Continuity	BUZZER	BUZZER/LED	BUZZER	BUZZER	BUZZER	BUZZER	BUZZER
Diode test	●	●	●	●	●	●	●
Duty cycle	-	●	-	●	-	-	●
dBm	-	-	-	-	-	-	-
Conductance	-	-	-	-	-	-	-
Auto power save	●	●	●	●	●	●	●
Battery check	-	-	-	-	-	-	-
Data hold	●	●	●	●	-	-	●
Range hold	●	●	-	-	-	●	●
Peak hold	-	-	-	●	-	-	-
Relative value	-	-	●	-	-	-	●
4-20mA%	-	-	-	-	-	-	-
True RMS (AC)	-	-	●	-	-	-	-
Auto zero adjust	-	-	-	-	-	-	-
Bargraph	-	●	-	-	●	-	-
Max/Min	-	-	●	-	-	-	●
Backlight	-	-	-	-	-	-	-
PC link	-	-	-	-	-	-	-
Dimension (H) mm	167	167	110	108	117	115	130
Dimension (W) mm	90	90	56	56	76	57	75
Dimension (D) mm	48	48	13	11.5	18	18	19.9
Mass (g)	315	320	84	85	117	85	160

Analog Multitester comparative chart

Model	EM7000	CX506a	YX-361TR	SH-88TR	AU-32	AU-31	YX360TRF
DCV (V)	0.3	120m	0.1	0.12	250m	300m	0.1
	1.2	3	0.5	3	2.5	3	0.25
	3	12	2.5	12	10	12	2.5
	12	30	10	30	50	60	10
	30	120	50	120	250	300	50
	120	300	250	300	500	1000	250
	300	1000	1000	1200	-	-	1000
	1000	-	-	-	-	-	-
ACV (V)	3	3	2.5	3	250m	300m	10
	12	12	10	12	2.5	3	50
	30	30	50	30	10	12	250
	120	120	250	120	50	60	750
	300	300	1000	300	250	300	-
	750	750	-	1200	500	1000	-
DCA (A)	0.12 μ	30 μ	50 μ	50 μ	250 μ	300m	50 μ
	0.3m	0.3m	2.5m	3m	2.5m	3	2.5m
	3m	3m	25m	30m	25m	-	25m
	30m	30m	0.25	0.3	250m	-	0.25
	300m	0.3	-	-	2.5	-	-
	6	-	-	-	-	-	-
ACA (A)	6	-	-	-	250 μ	300m	-
	-	-	-	-	2.5m	3	-
	-	-	-	-	25m	-	-
	-	-	-	-	250m	-	-
Resistance (Ω)	2k	5k	2k	3k	20k	20k	2k
	20k	50k	20k	30k	200k	200k	20k
	200k	500k	200k	300k	2M	2M	200k
	2M	5M	2M	3M	20M	20M	2M
	20M	50M	20M	30M	200M	200M	200M
	200M	-	-	-	-	-	-
Capacitance (F)	-	0.2 μ	-	1000 μ	-	-	10 μ
	-	20 μ	-	0.01	-	-	-
	-	2000 μ	-	0.1	-	-	-
	-	-	-	1	-	-	-
Auto range	-	-	-	-	●	●	-
Low frequency output measurement	●	-	●	●	●	●	●
Continuity	-	-	LED	LED	-	-	-
Battery check	-	-	1.5V	-	-	-	-
Auto polarity	-	-	-	-	●	●	-
Meter structure	BAND	BAND	BAND *	PIVOT	PIVOT	PIVOT	BAND
Drop shock proof meter	-	-	-	-	-	-	●
Zero center meter	●	-	●	●	-	-	●
Temperature measurement	-	-	-	-	-	-	-
Protection circuit for power line	-	-	-	-	-	-	-
hFE	-	●	○	○	-	-	○
Dimension (H) mm	165	165	150	150	48	48	159.50
Dimension (W) mm	106	106	100	100	110	110	129
Dimension (D) mm	46	46	37	36	124	124	41.50
Mass (g)	375	370	290	280	290	290	320

○ Optional accessory is necessary.

* Serial Number ≧ 6064916

Analog Multitester comparative chart

Model	SP21	SP20	SP-18D	TA55	CP-7D	AP33	VS-100
DCV (V)	0.3	0.25	0.3	0.3	0.25	10	10
	3	2.5	3	3	2.5	50	50
	12	5	12	16	10	250	250
	30	10	30	30	50	500	500
	120	50	120	60	250	-	-
	600	100	600	-	500	-	-
	-	500	-	-	-	-	-
	-	-	-	-	-	-	-
ACV (V)	12	10	12	30	10	50	10
	30	50	30	120	50	250	50
	120	250	120	300	250	500	250
	300	500	300	-	500	-	500
	600	-	600	-	-	-	-
	-	-	-	-	-	-	-
DCA (A)	60 μ	50 μ	60 μ	0.5	0.25m	25m	-
	30m	2.5m	30m	3	25m	250m	-
	0.3	25m	0.3	30	500m	-	-
	-	0.25	-	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
ACA (A)	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
Resistance (Ω)	2k	2k	2k	2k	2k	5k	2k
	20k	20k	20k	20k	20k	500k	20k
	2M	200k	2M	200k	1M	-	2M
	-	2M	200M	2M	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
Capacitance (F)	500 μ	500 μ	1000 μ	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
Auto range	-	-	-	-	-	-	-
Low frequency output measurement	-	-	-	-	●	-	-
Continuity	BUZZER	-	-	BUZZER	-	-	-
Battery check	1.5V	1.5V	1.5V	12V	1.5V	1.5V/9V	-
Auto polarity	-	-	-	-	-	-	-
Meter structure	BAND	BAND	BAND	BAND	PIVOT	PIVOT	PIVOT
Drop shock proof meter	●	●	●	●	-	-	-
Zero center meter	●	-	-	-	-	-	-
Temperature measurement	-	○	-	-	-	-	-
Protection circuit for power line	-	-	-	-	-	-	●
hFE	-	-	-	-	-	-	-
Dimension (H) mm	144	144	159.5	142	119	126	144
Dimension (W) mm	99	99	129	97	85	87	96
Dimension (D) mm	41	41	41.5	38	23	30	56
Mass(g)	270	270	320	300	140	185	400

○ Optional accessory is necessary.

ISO 9001

Quality Management System

The manufacturing plant of Sanwa Tesmex Co., Ltd. obtained ISO9002 certification from the foundation "Japan Quality Assurance Organization (JQA)" in 1996. In October 2002, Sanwa Electric Instrument Co., Ltd. was organized as one company incorporating the manufacturing division and sales division. In November 2002, the company obtained ISO9001:2000 certification (JQA-1453). The scope of the registration covers the design, development, production and servicing of multi-meters, clamp meters, insulating-resistance testers, standard generators, light power meters, and laser power meters.



ISO 14001

Environmental Management System ISO 14001

We implemented activities aimed at acquiring certification under the ISO 14001 standard for environmental management systems, and were granted the certification by the Japan Quality Assurance Association in November 2007. (JQA-EM5956)




Environmental Philosophy

We involve all employees in environmentally balanced activities throughout every stage of the process of delivering products and services to customers in order to achieve sound environmental management as a community and customer-oriented company. (Established on April 2nd, 2007)

Traceability

Traceability to prove the compliance with national and international standards is an essential factor for measuring instruments used as test instruments associated with quality assurance. Products of Sanwa are calibrated by reference samples which is periodically checked for its compliance with national standards. A calibration certificate and test data report are available on your request (a fee applies).

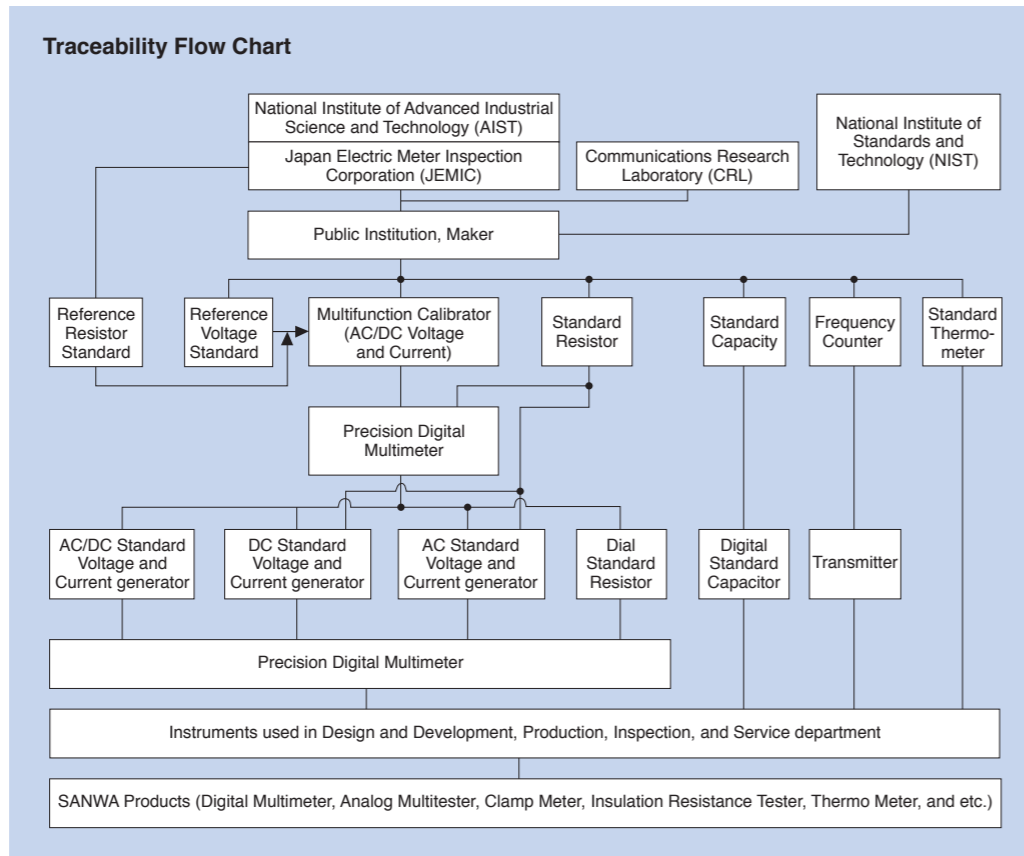

Repairs and servicing

Please contact an agent of Sanwa in your country for periodic calibration and repairs, which are offered on a chargeable basis. Please refer to the website of Sanwa for the authorized agents.

Safety

The International Safety Standard IEC61010

This Safety Standard which is established for protecting operators and environment stipulates safety requirements for measuring instruments and electric equipment. The IEC standard defines the degree of pollution, measurement classification, barrier, material, spatial distance and creepage distance to assure safety. The impulse withstand voltage as transitional energy is estimated from the measurement category and main power supply voltage to conduct tests for measuring instruments.

Test voltage (impulse withstand voltage)

Nominal AC or DC line of main power supply and neutral voltage	CAT. II	CAT. III	CAT. IV
300V	2500V	4000V	6000V
600V	4000V	6000V	8000V
1000V	6000V	8000V	12000V

The output impedance of an impulse generator is 12Ω in the measurement category II, and 2Ω in measurement categories III and IV.

CE marking

CE CE marking is a safety mark which can be attached only on a product meeting the safety requirements of the Directive of Council of the European Union (EC Directive). A product attached with the CE mark is designed so as to meet the requirements of the "Low Voltage Directive" and "EMC Directive" of the EC Directive. Low Voltage Directive: This Directive covers products of power supply voltage of 50V-1000V (AC) and 75V-1500V (DC), and it defines electric safety requirements against shocks, burns, etc. The applicable standard is EN61010 corresponding to IEC1010 give on the left. EMC Directive: This Directive stipulates conditions so as not to give out strong electromagnetic waves from equipment to the outer environment and to protect equipment from the effect of electromagnetic waves from the outside.

Measurement category (overvoltage category)

The IEC standard classifies measuring circuits according to measurement categories for the safe use of a measuring instrument in low voltage facilities. The measurement categories are classified into I to IV. A larger number of the category denotes a spot involving higher transient energy. For safe measurement, wear protective gears such as insulated gloves and dust-proof glasses in an environment of CAT. III.

Measurement category IV (CAT. IV):

Equipment used for measurement in low voltage facilities. Temporary overcurrent preventer, and electric measurement on ripple control unit, etc.

Measurement category III (CAT. III):


Equipment used for measurement in building facilities. Distribution board, circuit breaker, wiring including cables, busbar, junction box, switch, receptacle, and industrial equipment located in fixed facilities, and other equipment such as a fixed motor connected to fixed facilities in a permanent manner.

Measurement category II (CAT. II):

Equipment used for measurement performed on a circuit directly connected to low voltage facilities. Measurement on electric household appliances, portable tools and similar tools.

Measurement category I (CAT. I):

Equipment used for measurement on a circuit not directly connected to main power supply. Circuit not derived from the main power supply.

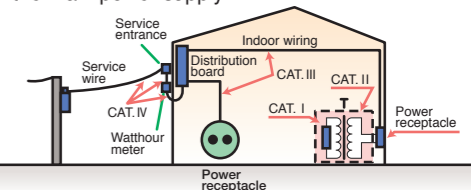

For safe measurement

Method for safe use of measuring instrument

Multimeter

Voltage measurement

Never use a measuring instrument for a measurement category higher than specified. A tester not conforming to the international safety standard is for use with weak current. Never use these testers on a high power circuit of 250V or more (excluding VS-100). Referring to measurement categories defined in the IEC standard, use a measuring instrument of equivalent or higher category. For instance, when a measuring instrument is used on a motor of facility of 200V main power supply, which corresponds to Category III, use a measuring instrument of CAT. III or higher.

Current measurement

Use special caution not to input voltage to the current measuring terminal in measurement. In current measurement, a meter is connected in series with the measuring circuit. For this reason, impedance inside the meter is low, thereby possibly causing a short-circuit fault. To prevent such a short-circuit fault and assure safe operation, fuses are installed for protection. Check the protection capability of the fuses. RD700 uses a quick-breaking ceramic fuse of rated voltage 250V and breaking current 1.5kA for the milliamp measuring circuit, which causes the fuse to blow out to prevent short-circuit when the main power supply is 250V or less and short circuit current is 1.5kA or less.

Clamp meter

- Use all clamp meters for measurement of low voltage circuit of 600V or less.
- In choosing an appropriate model, special attention should be paid to the current measurement range and diameter of a conductor to be clamped.

Insulation resistance tester

- The insulation resistance tester cannot be used on an measuring object in live-wire status.
- If the measuring voltage is specified, choose a model of the specified voltage. It is a general practice to choose the measuring voltage equivalent to or a little higher than voltage usually applied to the measuring object.
- Since the insulating-resistance tester measures resistance values by applying DC high voltage on a measuring object, the measurement may damage the measuring object if voltage is directly applied on the electronic circuit including the IC and LSI.
- The insulating-resistance tester generates DC high voltage during measurement. If an electric shock occurs, a falling accident from a high altitude may follow. Use special caution in operation at a high altitude.
- If your measuring instrument is provided with a voltage measuring function, use it at no higher than the maximum measuring voltage.

Thermo Meter (Temperature Probe)

- The temperature sensor cannot be used for measurement in direct contact with a live part.
- Use caution in handling a sharp-edged probe to avoid an injury.
- The grip is heated in high temperature measurement. Use an appropriate jig to secure the probe in high temperature measurement.

Tachometer · Speed Meter

- In measurement on a rotating motor (measurement of speed for elevator in operation), risks are involved due to the strong force of the measuring object. Use special caution in measurement to assure safety. Never touch the rotating part during measurement.

Laser Power Meter

- Infrared semiconductor laser light is invisible to the naked eye. It may occasionally emit high power of 30mW or more, which may threaten vision if eyes are exposed to the light. Use special caution to avoid gazing at the light directly or exposing eyes to reflected light.

Function marks

RMS **True RMS** (True root-mean-square value)
True RMS value. AC current and voltage of a non-sine wave can be measured by true RMS values.

2CH **Dual Display**
Allows simultaneous reading.

DSP **Drop shock proof**
The meter element is furnished with a taut band and impact-resistant design enough to withstand a shock of drop.

DCA ACA **DC / AC measurable**
Both ACA and DCA are measurable.

LEAK **Leakage current**
A clamp meter that can make the measurement of leakage current have a range to allow measurements in millamp.

Hz **Frequency**
Expressed in the unit of Hz (hertz). Commercial frequency of 50Hz/60Hz can be measured.

+ **Capacitor**
Capacitor capacity (electrostatic capacity) is measured and expressed in the unit of F (farad), μ F, etc.

Duty **Duty cycle**
The duty cycle of repeating waveform is indicated on a percentage basis (%). It can be used for the analysis of control signals.

CONT. LED **Continuity check**
The LED lights up when the measuring object is electrically conducting.

Continuity buzzer
The buzzer sounds when the measuring object is electrically conducting.

BATT CHECK **Battery check**
Battery voltage is measured and assessed by running a given current.

°C **Temperature measurement**
Temperature can be measured using the optional probe.

4-20 **4-20mA%**
4-20mA for sending instrumentation signals. Expresses the current loop of 4mA as 0% and 20mA as 100%

dBm **dBm**
Scaling of voltage values is performed according to the reference impedance into dBm. Convenient for use with audio equipment.

hFE **hFE**
Provided with graduations for measuring the DC current amplification factor (hFE) of a transistor.

EF (NCV) **EF function**
Non contact AC voltage detection function

Capture PEAK

Capture (peak hold)
The peak value like in-rush current is indicated. The minimum pulse width capturable differs according to models.

LPF **Low-pass filter**
Low-pass filter cuts current value of high frequency.

INRUSH **Inrush**
Inrush current can be measured

+ **Zero-center meter (NULL)**
Moves the indicator of the analog tester to the center of the scale (meter graduations) to make measurement of positive and negative voltage.

AUTO V Ω **Automatic Measurement for DCV/ACV/ Ω**
Measurement function of DCV/ACV/ Ω can be automatically selected.

LOG GING **Logging**
The reading can be stored in the meter itself.

AUTO POL **Auto polarity**
Puts the indicator at the center in the automatic standby status by the setting of the selector switch so as to allow measurement by positive and negative values.

POL Switch **Polarity switch**
The positive and negative polarity of the measuring terminal can be changed by this switch.

OUT **Output terminal**
Cancels the DC current portion of voltage mixed with DC and AC to measure the AC portion alone. It is used for the measurement of audio signals.

AP OFF **Auto power off**
Power is automatically turned off when a certain time has elapsed after power-up. Some models have a function to cancel this function.

APS **Auto power save**
The display disappears to bring the device into the power-save state when a certain time has passed after power-up. Some models have a function to cancel this function.

DATA HOLD **Data hold**
A value indicated on the display is fixed. It is fixed even after the test lead is removed, and can be used as a record for reference purposes.

RNG HOLD **Range hold**
The range is fixed in the measurement of varying voltage and current which is difficult to read in the auto range.

REL **Measurement of relative value**
A certain measured value is assumed as 0 and measured values after that are expressed by positive or negative values relative to the value fixed as 0.

MAX MIN AVG **MAX / MIN / AVG**
The maximum value, the minimum value and the average value are displayed or recorded. The recorded value can be seen later on the display.

LP Ω **Low power ohm**
Resistance is measured by applying voltage of approximately 0.4V or less on a measuring object. It is characterized by the fact that the semiconductor does not conduct at approximately 0.4V or less even in forward direction.

BACK LIGHT **Backlight**
Allows indicator reading in a dark place.

AUTO **Automatic live circuit detection**
Live circuit detection prevents insulation test if the measured object is a live circuit.

AD **Auto discharge**
When the measurement of insulating resistance is complete, voltage charged in the measuring object is discharged.

USB **USB connection**
Data can be outputted by connection to the USB port of a PC.

232C **RS232C connection**
The signal output terminal is provided to send data to a PC. RS232C is the name of the signal standard.

POWER FUSE **Fuse for power supply**
Current-limiting fuse to break the conduction up to 100kA

PC Link °C **Temperature measurement with PC Link**
Temperature can be measured using the optional probe and PC Link software. (T-300PC is necessary.)

Zoom **Zoom bar graph**
The scale is changed so as to allow reading minute changes on the bar graph.

TLR Cal **Correction of resistance of test lead**
This is a function to cancel the resistance portion of the internal circuit of the main body and test lead in the resistance measurement.

0 Ω ADJ **Zero-ohm adjuster**
Cancels the contact resistance and internal resistance of the test lead to allow the measurement of the resistance value of a measuring object alone.

INS Ω **Insulating resistance**
Insulating resistance can be measured (e.g. 500V/1000M Ω)

DCV **DC voltage**
Mark for clamp meters with DCV function.

Glossary

Accuracy / Tolerance
Correctness. JIS defines the term "accuracy" to be used for digital testers and "tolerance" for analog testers. The accuracy / tolerance differs depending on the range.

\pm ($\square\%$ + \square) = \pm ($\square\%$ rdg+ \square dgt)
rdg is an abbreviation of "Reading" meaning a read value on digital display. "dgt" is an abbreviation of "Digit" meaning the least unit of digital display. For instance, " ± 2 dgt" refers to error of ± 2 counts.

Full-scale value (fs)
It is the indication of tolerance expressed by percentage values relative to the full-scale value of the range.

Scale length
The tolerance in resistance measurement is expressed with reference to the scale length of the range.

Frequency characteristic
Frequency range of measurable signals in the measurement of AC voltage and current.

Input resistance (Impedance)
Internal resistance between measuring terminals. For instance, it is expressed as "M Ω " with the DMM and as "K Ω /V" with the AMT.

Clamp diameter
It gives a guide for the thickness of a clampable wire.

Clamp conductor size
Size of a maximum conductor shape.

Withstand voltage
It refers to insulating withstand voltage of the measuring instrument itself.

Range
The measuring range of a function is sub-divided and expressed as 2V/20V/200V, etc.

Auto range
The range is automatically increased or decreased in steps such as 2V/20V/200V and moves to the optimum range for measuring voltage.

Live-wire check
When a test lead is set at an insulating resistance measuring point on a measuring object, the ACV measuring status starts to check whether voltage is being supplied.

Display digit
Maximum number of display digits of the digital display. 1999 is expressed as 2000. Three and a half digits and four and a half digits are also used.

Function
Function for measuring voltage, current, resistance, electrostatic capacity and frequency.

Resolution
Displayable minimum value of the last digit. For instance, the resolution of the 1.999V range is 0.001V.

A
AD-30-2.....P48
AD-71AC-2.....P48
AD-72AC.....P48
AP33.....P37

C
C-09S.....P49
C-77.....P49
C-77H.....P49
CAM600S.....P06
C-CA.....P49
C-CD.....P49
C-CL.....P49
C-CL3000.....P50
C-DG3a.....P50
CD732.....P27
CD770.....P26
CD771.....P26
CD772.....P26
CD800a.....P27
CD800b.....P28
CD800F.....P28
CL-13a.....P47
CL-14.....P47
CL-15a.....P47
CL-16.....P47
CL-22AD.....P11
CL33DC.....P11
CL3000.....P11
CL-506a.....P48
CL-561.....P47
CL-700.....P47
CL-700SMD.....P47
CL-DG3a.....P47
C-M53.....P50
CP-7D.....P37
C-PC7.....P50
C-PC10/S.....P50
C-PM3.....P50
C-SP.....P50
C-SPH.....P50
CX506a.....P34
C-YS.....P50

D
DCL1000.....P06
DCL11R.....P07
DCL1200R.....P08
DCL31DR.....P09
DCL3000R.....P08
DCM-22AD.....P07
DCM60R.....P08
DCM600DR.....P09
DCM660R.....P08
DCM400.....P06
DCM400AD.....P07
DCM2000DR.....P09
DG34a.....P19
DG35a.....P19
DLC460F.....P09
DM1009S.....P18
DM509S.....P18

E
EM7000.....P34

H
H-50.....P50
H-70.....P50
H-700.....P50
HFE-6T.....P48
HG561H.....P16
HM-1.....P50
HV-10.....P47
HV-20.....P47
HV-60.....P47

K
K-250CD.....P48
K-250PC.....P48
K-8-250.....P49
K-8-300.....P49
K-8-500.....P49
K-8-650.....P49
K-8-800.....P49
K-AD.....P49
KB-USB20.....P48
KB-USB7.....P48
KB-USB773.....P48
KD2.....P43
KIT-8D.....P48
KP1.....P29
KS1.....P43
KS3.....P43

L
LCR700.....P42
LCR-USB.....P48
LP1.....P40
LX2.....P39
LX3132.....P39

M
M53.....P17
MG500.....P16
MG1000.....P16
MG5000.....P14, 15

O
OPM35S.....P40
OPM37LAN.....P40

P
PC20.....P25
PC20TK.....P44
PC700.....P24
PC7000.....P23
PC710.....P24
PC720M.....P23
PC773.....P25
PC Link 7.....P21, 48
PDM1529S.....P17
PDM509S.....P18
PDM5219S.....P17
PDR302.....P42
PM3.....P30
PM33a.....P29
PM300.....P30
PM7a.....P31
PM11.....P30
PS8a.....P31

R
RD700.....P27
RD701.....P27

S
SE300.....P41
SE9100.....P41
SH-88TR.....P35
SP-18D.....P36
SP20.....P36
SP21.....P35
STD5000M.....P45

T
TA55.....P36
TH3.....P43
TL-11Ta.....P46
TL-112a.....P46
TL-21a.....P46
TL-21M.....P46
TL-23a.....P46
TL-25a.....P46
TL-29.....P46
TL-35.....P48
TL-36.....P46
TL-509S.....P46
TL-561.....P46
TL-61.....P46
TL-61Ta.....P46
TL-61Tb.....P46
TL-61Tc.....P46
TL-91C.....P47
TL-91.....P46
TL-91M.....P46
TL-A01.....P47
TL-A7M.....P47
TL-A7M2.....P47
TL-M54.....P46
TL-PM3.....P46
TLF-120.....P46
T-300PC.....P48
T-THP.....P48

V
VS-100.....P37

Y
YX360TRF.....P35
YX-361TR.....P34

