




VHF AIR BAND TRANSCEIVER

# IC-A200

Meets  
MIL-STD 810

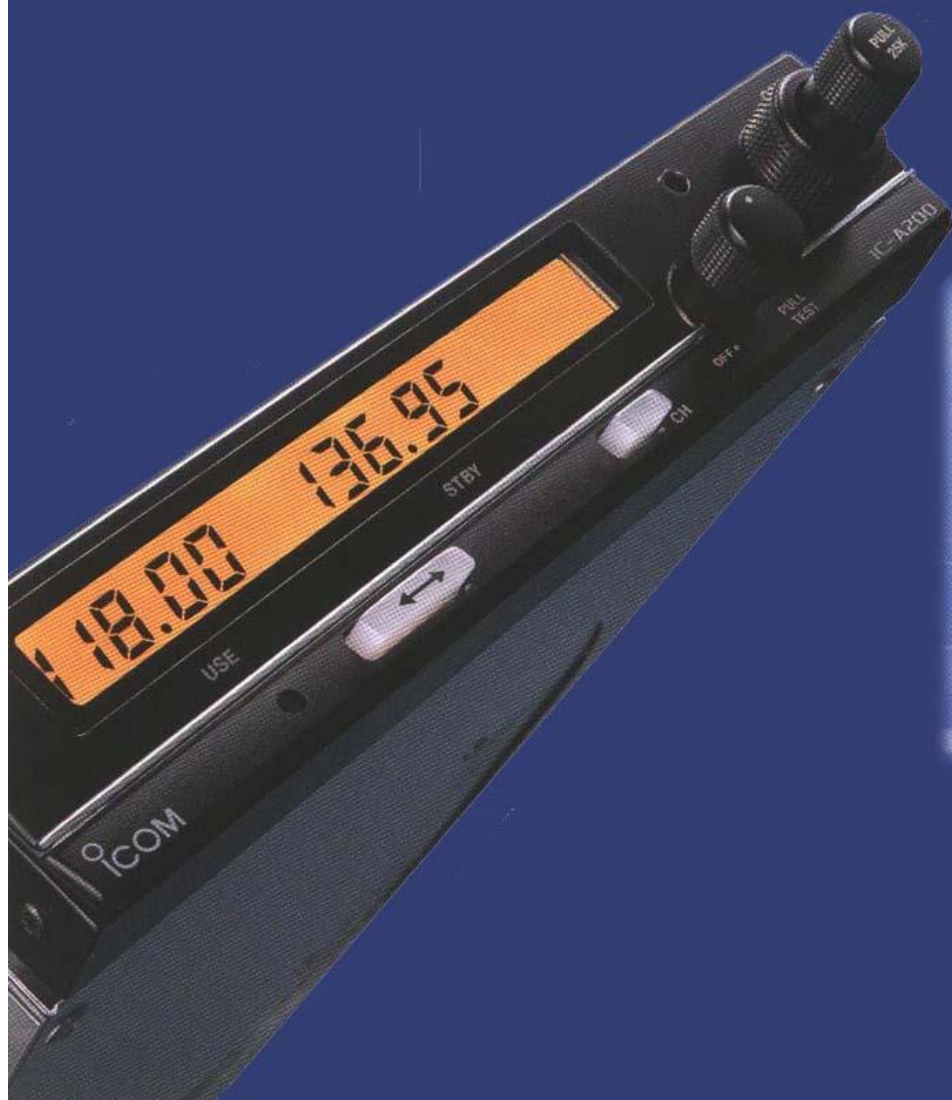

There's no substitute for ~~simple, the best~~ when it comes to communications equipment in an aircraft.

Icom's high-quality VHF communications transceiver, the IC-A200 gives you a vital capability and offers the best.

The IC-A200 is —

- Easy to see.
- Simple to operate.
- Durable and compact.

It has —

- Full frequency coverage.
- 9 memory channels.
- Remote control capability.



Icom Inc.

**Easy-to-see function display**

All important information is provided in extra-large characters for easy viewing, day or night. Effective viewing angle increases side visibility making the IC-A200 easier to read.

At all times, the USE and STBY (standby) window frequencies simultaneously appear on a large function display.

**Illuminated switches and function display**

Switches and the function display are illuminated for night flying. Illumination dims and brightens in synchronicity with the aircraft panel.

**Simple to operate**

The automatic squelch function eliminates the need to make inconvenient squelch adjustments.

All required functions are activated with a minimum number of switches and controls.

**2 ways to select the desired frequency****• Direct frequency selection**

A desired frequency can be selected in the USE window directly.

**• Indirect frequency selection**

Allows you to select a desired frequency in the STBY window. Pushing the [↔] switch exchanges the USE window frequency for the STBY window frequency.

**Remote control capability**

Memory channel selection and exchanging of the USE and STBY window frequencies can also be accomplished with remote switches.

Hence, you can place these switches in the most convenient place.

**3 kinds of tuning steps**

The transceiver has 2 concentric tuning knobs. The small tuning knob provides 50 kHz tuning steps. When the small tuning knob is pulled out, 25 kHz tuning steps are selected. The large tuning knob offers 1 MHz tuning steps.

These features cut down on the time and trouble it takes to tune your transceiver to the desired frequency.

**Full frequency coverage**

The advanced IC-A200 covers 118.000~136.975 MHz continuously in 25 kHz tuning steps. A total of 760 communication channels are available.

**9 memory channels**

For storing ATIS, ground control, tower, company radio, and many other required frequencies, 9 memory channels are included.

**Memory protection capability**

Once you've chosen the frequencies you want to reside in the IC-A200, you need not worry about losing them.

To prevent unwanted changes, your Icom Avionics Dealer can specify any number of memory channels as protected channels.

**Durable construction and stable output power**

The dependable die-cast body ensures ample heat dissipation and a stable 7 W of RF output power.

In short, it's made to last in an environment of abrupt temperature variations.

**Intercom functions**

With additional wiring aboard the aircraft, an intercom function allows you to talk with your crew.

**Compact body for easy installation**

Measuring just 6.3(W) × 1.3(H) × 10.7(D) in.\* the IC-A200 neatly fits the mounting brackets used on most aircraft.

Required connectors are also included.

\* 160(W) × 34(H) × 271(D) mm

**OPTION****PS-80 DC POWER SUPPLY**

Designed for quick and easy installation and removal of the IC-A200, the PS-80 has a built-in speaker and a microphone\*. Provides convenient operation of the IC-A200 on the ground.

\* Some versions do not come with a microphone.

Dimensions : 200(W) × 200(H) × 300(D) mm  
7.9(W) × 7.9(H) × 11.8(D) in

Output : 13.8 V DC / 6 A

**SPECIFICATIONS****GENERAL**

- Frequency coverage : 118.000-136.975 MHz
- Mode : AM (6K00A3E)
- Number of memory channels: 9
- Tuning steps : 25 kHz, 50 kHz or 1 MHz
- Antenna impedance : 50 Ω
- Power supply requirement : 13.8 V DC ±15% (negative ground)
- Current drain (at 13.8 V DC) : Tx 2.6 A  
Rx Squelched 320 mA  
Max. audio output 600 mA
- Usable temperature range : -20°C to +55°C
- Frequency stability : ±0.0015% (-20°C to +55°C)
- Dimensions : 160(W)×34(H)×271(D) mm  
(projections not included) 6.3(W)×1.3(H)×10.7(D) in
- Weight : 1.1 kg; 2.4 lb

**TRANSMITTER**

- Output power : 7 W (carrier power)
- Microphone impedance : 600 Ω

**RECEIVER**

- Receive system : Double-conversion superheterodyne
- Intermediate frequencies : 1st 32.455 MHz 2nd 455 kHz
- Sensitivity : 2 μV for 6 dB S/N (with 1 kHz, 30% mod.)
- Spurious rejection : -80 dB
- Audio output power : 5 W with a 4 Ω load  
100 mW with a 500 Ω load

The IC-A200 meets MIL-STD requirement and strict environmental standard for shock (MIL-810C, D, E) and vibration (MIL-810C, D, E).

All stated specifications are approximate and subject to change without notice or obligation.

**Icom Inc.**

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

**Icom America Inc.**

<Corporate Headquarters>  
2390 116th Avenue N.E., Bellevue, WA 98004, U.S.A.  
Phone: (425) 454-8155 Fax: (425) 454-1509  
URL : <http://www.icomamerica.com>  
<Customer Service> Phone: (425) 454-7619

**Icom Canada**

Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone: (604) 952-4266 Fax: (604) 952-0090  
URL : <http://www.icomcanada.com>

**Icom (Australia) Pty. Ltd.**

A.B.N. 88 006 092 575  
290-294 Albert Street, Brunswick, Victoria, 3056, Australia  
Phone: 03 9387 0666 Fax: 03 9387 0022  
URL : <http://www.icom.net.au>

**Icom New Zealand**

145A Harris Road, East Tamaki, Auckland, New Zealand  
Phone: 09 274 4062 Fax: 09 274 4708  
URL : <http://www.icom.co.nz>

**Icom (Europe) GmbH**

Communication Equipment  
Himmelfeier Str. 100, D-40225 Düsseldorf, Germany  
Phone: 0211 346047 Fax: 0211 333639  
URL : <http://www.icomeurope.com>

**Icom Spain S.L.**

C/ta. de Gracia a Marresa Km. 14 750  
08190 Sant Cugat del Valles Barcelona, SPAIN  
Phone: (93) 590 26 70 Fax: (93) 589 04 46  
URL : <http://www.icomspain.com>

**Icom (UK) Ltd.**

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.  
Phone: 01227 741741 Fax: 01227 741742  
URL : <http://www.icomuk.co.uk>

**Icom France S.a**

Zac de la Plaine, Rue Brindejonc des Moulinais  
BP 5804, 31505 Toulouse Cedex, France  
Phone: 561 36 03 03 Fax: 561 36 03 00  
URL : <http://www.icom-france.com>

**Asia Icom Inc.**

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone: (02) 2559 1899 Fax: (02) 2559 1874  
URL : <http://www.asia-icom.com>

Your local distributor/dealer:



Certificate Number Q14190

Icom Inc. (Japan), is an ISO9001 certification acquired company.

[WWW.VIVA-TELECOM.RU](http://WWW.VIVA-TELECOM.RU)