

FPM-3060G

Industrial 6" VGA Flat Panel Monitor with Direct-VGA Port



Features

- 6" VGA TFT LCD with resolution up to 640 x 480
- Robust design with stainless steel chassis and aluminum front panel
- Hard anodic coating to prevent panel abrasion and acid corrosion
- Anti-reflective screen with tempered glass
- Supports stainless steel front panel (Customization)
- OSD control pad on front panel
- Supports transreflective LCD technology (Customization)
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- NEMA4 / IP65 Compliant

Introduction

FPM-3060G is a 6" flat panel monitor designed for industrial applications with small display requirements. High brightness of up to 400 nits makes the display clearly visible, while the wide operating temperature range of 0 to 50° C combined with vibration resistance makes it suitable for rugged environments. Mounting of the small and compact display can be done in panels, with VESA arms, and even directly on products in the UNO-2000 and MBPC-200 series. Optional versions of FPM-3060G provide RS-232 or USB interfaces for a resistive touchscreen.

Specifications

General

- **Button Controls** OSD (Onscreen Display) control pad on front panel
- **Certification** BSMI, CCC, CE, FCC-B
- **Dimension (WxHxD)** 220 x 150 x 45 mm (8.7" x 5.9" x 1.8")
- **Enclosure** Front panel : Aluminum with hard anodic coating, Rear cover : Stainless steel chassis
- **Mounting** Panel, wall, desktop, VESA arm, or 19" rackmount with optional mounting kit
- **Power Input** External 42 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 3.5 A output
- **Video Port** VGA
- **Weight (Net)** 1.82 kg (4.01 lbs)

LCD Display

- **Display Type** VGA TFT LCD (AUO)
- **Display Size** 6"
- **Max. Resolution** 640 x 480
- **Max. Color** 262K
- **Viewing Angle (H, V)°** 140, 120
- **Luminance (cd/m2)** 400
- **Backlight Life (hrs)** 20,000
- **Contrast Ratio** 300 : 1

Touchscreen (Optional)

- **Sensor** Fujitsu
- **Type** 4W Resistive
- **Interface** RS-232 or USB
- **Lifespan** 1 million touches at a single point
- **Light Transmission** 82.5%
- **OS support** (RS-232) DOS, Windows® 95/98/ME/2000/XP (USB) Windows 95/98/ME/2000/XP/CE, Linux
- **Power Consumption** +5V @ 200 mA (RS-232)
+5V @ 100 mA (USB)"
- **Touch Resolution** 4096 x 4096

Environment


- **Operation Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** -20 ~ 60° C (-4 ~ 140° F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Water proof** IEC529 IP65 (Front Panel)
- **Vibration** 5-500 Hz, 1 Grms (Operating, Random)

Ordering Information

- **FPM-3060G** Industrial 6" Flat Panel Monitor
- **FPM-3060G-R** FPM-3060G with resistive touchscreen (RS-232 interface)
- **FPM-3060G-U** FPM-3060G with resistive touchscreen (USB interface)

Dimensions

Unit: mm

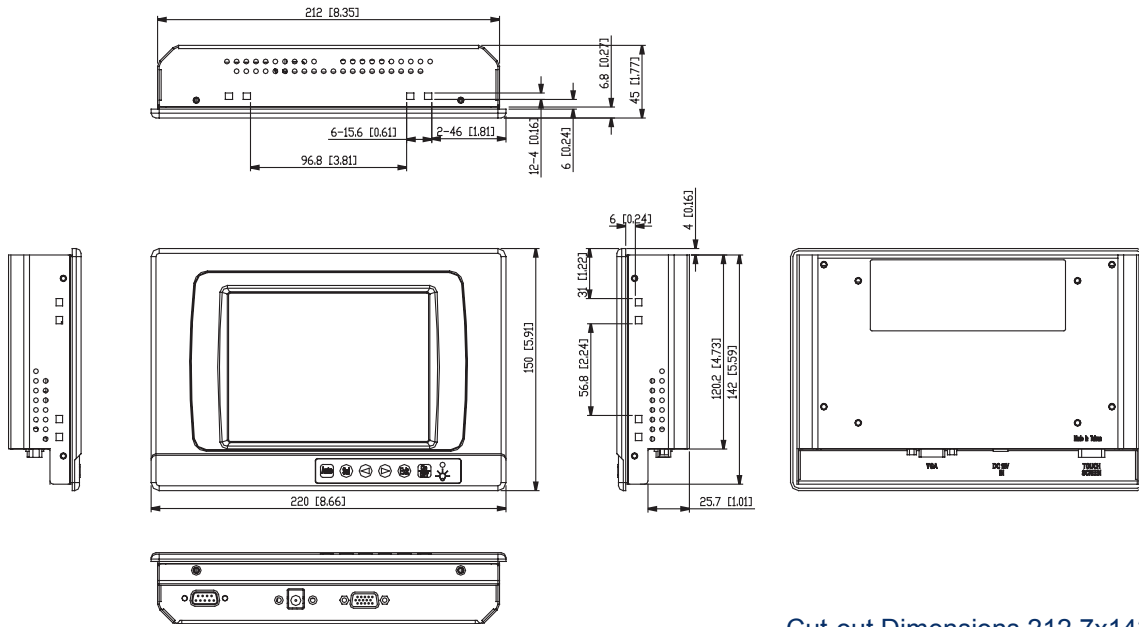

Cut-out Dimensions 212.7x142.7 mm

I/O View



VGA Port

Power Connector

Touchscreen Port
(USB or RS-232)